Calhoun
Institutional Archive of the Naval Postgraduate School



Calhoun: The NPS Institutional Archive

DSpace Repository

Theses and Dissertations | 1. Thesis and Dissertation Collection, all items

1949-05-20

A design of an annular cascade tunnel and a cascade of airfoils

Laster, Conley C., Jr.; Geehring, Donald R.

Cambridge, Massachusetts; Massachusetts Institute of Technology

http://hdl.handle.net/10945/6363

Downloaded from NPS Archive: Calhoun



http://www.nps.edu/library

Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

DESIGN OF AN ANNULAR CASCADE TUNNEL AND A CASCADE OF AIRFOILS

CONLEY C. LASTER, JR.
DONALD R. GEEHRING

Thesis
L28

Mech 151
8854

Copy No. 2

DESIGN OF

AN ANNULAR CASCADE TUNNEL

AND

A CASCADE OF AIRFOILS

by

Lt. Comdr. C. C. Laster, Jr. USN
B.S. U.S. Naval Academy
(1940)

Lieut. D. R. Geehring USN
B.S. University of Alabama
(1939)

Submitted in Partial Fulfillment of the
Requirements for the Degree of
Master of Science
at
Massachusetts Institute of Technology

20 May 1949

Thesis
L28

TABLE OF CONTENTS

	Page No.
Letter of Transmittal	
Acknowledgements	
Summary	1
Introduction	2
I The Low Speed Annular Cascade Tunnel	7
Description	7
Discussion of Design Details	9
Pressure Losses in Tunnel	12
Design Drawings	17
II The Annular Cascade of Airfoils	19
Two Dimensional Cascade Theory	19
Forces on an Airfoil in Cascade	25
Cascade A	27
Cascade B	28
III Experimental Investigation	36
Results	36
Suggestions for Further Work	38
Appendix A	40
References	50
Table I Ordinates of Mean Camber Line - Blade Sections - Cascade B	52
Table II Ordinates of Blade Sections - Cascade B	53

Figures:

1. MIT Annular Cascade Tunnel - General Arrangement and Dimensions .....
2. Cascade Nomenclature .....
3. Cascade A .....
4. Cascade B .....

13676

TABLE OF CONTENTS

Page No.

Abstract i

Introduction 2

I The Low Speed Annular Cascade Tunnel 7
Description 7
Operation of Cascade Models 9
Pressure Losses in Tunnel 12
Cascade Drawing 17

II The Annular Cascade of Airfoils 19
Two Dimensional Cascade Theory 20
Forces on an Airfoil in Cascade 23
Cascade A 27
Cascade B 29

III Experimental Investigation 36
Results 38
Conclusions for Present Work 39

Appendix A 40

Bibliography 50

Table I Characteristics of Mean Cascade Plane -
Blade Positions - Cascade B 52

Table II Coordinates of Blade Sections -
Cascade B 53

Figures:

1. NCI Annular Cascade Tunnel - Assembly
Drawing and Cascade Plane 17

2. Cascade Characteristics 18

3. Cascade A 28

4. Cascade B 29

TABLE OF CONTENTS (continued)

Page No.

Figures (continued):

5. Determination of Fan Performance in MIT Annular Cascade Wind Tunnel .....

6. Velocity and Yaw Survey - Test Section - MIT Annular Cascade Wind Tunnel .....

7. Air Outflow Angles Determined by a Tangential Traverse of the Blade Wakes - Cascade A .....

8. Annular Cascade Tunnel - Overall View .....

9. Annular Cascade Tunnel - Test Section - Three-quarter Front View .....

10. Annular Cascade Tunnel - Test Section - Three-quarter Rear View .....

11. Traversing Mechanism - Showing Claw Type Yaw Head

TABLE OF CONTENTS (continued)

Chapter (Sub-Title):

5. Investigation of Dry Performance in MIG Welder ..... Page

6. Velocity and Tip Study - Test Section - MIG Welder Studies Using Tunnel ..... Page

7. Tip Configuration Influenced by a Tungsten Inert Gas Arc Welding Torch - Chapter 6 ..... Page

8. Results Chart in Tunnel - Overall View ..... Page

9. Velocity Study in Tunnel - Test Section - Tungsten Arc Flow Fig. ..... Page

10. Velocity Studies Tunnel - Test Section - Tungsten Arc Flow ..... Page

11. Conclusions Recommendations - Tungsten Inert Gas Arc Welding ..... Page

MIT Gas Turbine Laboratory
Cambridge, Massachusetts

20 May 1949

Professor Joseph S. Newell
Secretary of the Faculty
Massachusetts Institute of Technology
Cambridge 39, Massachusetts

Dear Professor Newell:

A thesis entitled "Design of an Annular Cascade Tunnel and a Cascade of Airfoils" is submitted herewith, in partial fulfillment of the requirements for the Degree of Master of Science at the Massachusetts Institute of Technology.

Very truly yours,

Conley C. Laster, Jr.
Lt. Comdr. USN

Donald R. Geehring
Lieut. USN

Professor James R. Powell
Secretary of the Faculty
Massachusetts Institute of Technology
Cambridge 39, Massachusetts

Dear Professor Powell:

A thesis entitled "Design of an Annular Cascade Turned
out a Success of Misfolia" is submitted herewith, in partial ful-
fillment of the requirements for the Degree of Master of Science
at the Massachusetts Institute of Technology.

Very truly yours,

Stanley C. Lasher, Jr.
Lt. Comdr. USN

Donald C. Deckrug
Lieut. USN

ACKNOWLEDGEMENTS

The generous assistance, cooperation, and advice of the following are gratefully acknowledged:

Dr. W. R. Hawthorne

Mr. F. Lustwerk

The United States Naval Shipyard
Charlestown, Massachusetts

The General Electric Company
(Aircraft Gas Turbine Division)
Lynn, Massachusetts

[illegible]

The persons satisfaction, registration, and status of

the following are gratefully acknowledged:

Dr. B. E. Lawrence

M. T. Lundberg

The United States Naval Postgraduate
School, Monterey, California

The Naval Research Laboratory
University Corp. Training Division
Lynn, Massachusetts

SUMMARY

A low speed annular cascade wind tunnel was designed and constructed and is presently installed in the MIT Gas Turbine Laboratory. It is anticipated that this tunnel will be used to secure data for correlation with three dimensional theory of flow in an annular cascade, particularly applicable to the design of compressor inlet guide vanes.

An annular cascade of thirty-six airfoils having a cubic variation of circulation with radius was designed for use in the tunnel. Construction of this cascade is pending. Another annular cascade of fifty-four airfoils is installed in the tunnel awaiting test upon completion of instrumentation.

A three dimensional vortex theory of flow in an annular cascade, developed by Dr. W. R. Hawthorne, is presented. This theory was employed in the design of the thirty-six airfoil cascade.

INTRODUCTION

The ever increasing development and production of axial flow compressor components of gas generators and gas turbine power plants has clearly outlined the need for knowledge of airflow behavior in a cascade of airfoils. This problem has been the subject of considerable study during the past decade.

Compressor inlet guide vanes, in particular, have frequently been found to give considerably different turning angles under test from those for which the vanes had been designed by employment of two dimensional theory. A lack of adequate theoretical development, together with the increased difficulties involved in experimental determination of three dimensional flow characteristics, has limited many previous investigations to a two dimensional flow pattern (References (1), (2), (3)). Some work has been done on three dimensional rotating cascade blowers (References (2), (4)).

Additional investigations are currently in progress in the low speed, two dimensional cascade tunnel of the Gas Turbine Laboratory, MIT. It was felt that additional valuable information could be obtained from a companion three dimensional annular cascade tunnel to supplement a vortex theory of flow in an annular cascade being developed by Dr. W. R. Hawthorne.

This project, therefore, was undertaken in October 1948 and is the subject of this thesis. The project logically divided

Introduction

into three phases:

I Design and construction of the low speed annular cascade tunnel.

II Design and construction of the annular cascade of airfoils.

III Experimental investigation of the flow field about the annular cascade and correlation of test results with the theoretical development.

It was originally envisioned that only Phases I and II could be expected to have reached completion by May 1949 and this has been borne out by the results to date. Design of the tunnel was initiated in October 1948. Construction of the tunnel by the Naval Shipyard, Charlestown, Massachusetts, was begun in late December 1948. Design and construction proceeded simultaneously, and the tunnel and the traversing mechanism (minus the probes) were completed during the second week of April 1949. The claw type yaw-meter probes were received from the Airflo Instrument Company, Glastonbury, Connecticut, in April 1949, and the remaining instrumentation is currently in progress.

Design of the annular cascade of airfoils was begun in November 1948 and completed in March 1949. Construction of this cascade by the General Electric Company, Lynn, Massachusetts, is pending.

It is anticipated that future experimental results obtained in the tunnel will be directly applicable to the design of inlet guide vanes for axial compressors and will be suitable for comparison and correlation with predictions of the three dimensional theory presented in this thesis (Appendix A).

SYMBOLS

A - cross-sectional area

a - distance, measured along chord line, from leading edge of airfoil to point of maximum camber

a_o - $dC_L/d\alpha$

C - velocity

C_D - drag coefficient

C_{D_p} - profile drag coefficient

C_L - lift coefficient

c - chord of airfoil

c_w - pressure loss coefficient through screen - $\dfrac{\phi^2}{(1-\phi)^2}$

D - drag force

F - screen area

F_r - projected wire area of screen

f - coefficient of friction

h - enthalpy per unit mass of gas

L - length (referring to cascade tunnel)

- lift force

l - length (referring to cascade blade)

N - number of blades in cascade

p - static pressure

p_o - stagnation pressure

Q - volume rate of flow

q - velocity head $(\rho V^2/2)$

- heat transfer per unit mass of gas

R - r/r_t

R_o - r_h/r_t

r - radius

s - gap between blades

- entropy per unit mass of gas

T - torque force

V - velocity

v - specific volume

w - mass rate of flow

X - axial force

z - exponent denoting variation with radius of circulation around a cascade blade

α - air angle measured from radial plane along axis of tunnel (Fig. 2)

α_{L_o} - angle of attack of airfoil at zero lift

Γ - circulation

δ - deflection angle (Fig. 2)

θ - angular distance measured from some fixed radial line

ρ - density

σ - stagger angle

ϕ - blockage ratio, $F_{r/F}$

Subscripts:

o - denotes stagnation condition

1, 2, etc. - stations along tunnel as per Fig. 1

1, 2 - stations forward and aft cascade respectively

h - at hub

m - mean value (Sketches, pages 25 and 26)

t - at tip

u - tangential component

x - axial component

I THE LOW SPEED ANNULAR CASCADE TUNNEL

Description

Overall Length (with 9 screens).....	157 inches
Center Line Height (above deck).....	38 inches
Maximum Inside Diameter.....	$27\frac{1}{4}$ inches
Test Section Inside Diameter.....	$15\frac{3}{4}$ inches
Capacity.....	8500 cfm
Velocity at Test Section:	
(with $9\frac{1}{4}$" diameter core).....	159 ft/sec
(with $7\frac{7}{8}$" diameter core).....	138 ft/sec

The general outline and basic dimensions of the tunnel are shown in Figure 1. A view of the completed tunnel is shown in Figure 8.

The tunnel is powered by a Buffalo Forge Company A8A4W5 CCW Axial Flow Fan, rated to deliver 8000 cu. ft/min at three inches of water static pressure at 1750 rpm. The fan is followed by a straight diffuser section 46 inches in length, enclosing a tapered conical fairing mounted on the rear of the fan motor. An angle of $8\frac{1}{2}$ degrees is included between the cone and the straight side of the diffuser.

Seven sixteen-mesh screens spaced at two inch intervals are placed behind the diffuser section. An accelerating section follows and reduces the tunnel diameter from $27\frac{1}{4}$ inches to $15\frac{3}{4}$ inches

2. The Lee Enfield Magazine Rifle

Specifications

Overall Length (with 9 inches)..... .57" inches

Length Sling Bridge (where used)..... .36 inches

Maximum Length Stripped..... .44½ inches

Bore Maximum Limits Diameter..... .303 inches

Magazine..... .8800 cubs

Projectile at Test Pressure

(With $\frac{2}{3}$ Charges used)..... .147 ft/sec

(With $\frac{2}{3}$ Charges used)..... .158 ft/sec

The general outline and basic dimension of the trigger are shown in Figure 1. A view of the completed assembly is shown in Figure 8.

The trigger is pressed to a position where locking should occur until 2lbs has, until at release must be fully capable of safely firing pressure at 1750 rds. The lug is followed by a straight pitching reaching to below is (angle), indicated a tapered portion between on the rear of the full lugs. In order of 45 degrees is inclined towards the rear but the straight side of the different.

There different-sized letters applied as the used interests are please [illegible] the different sensible. It accordingly angles follows the pressure is. Should diameter with 2½ inches is $\frac{3}{4}$ inches

in a length of 24 inches.

Two additional sixteen-mesh screens are placed immediately behind the accelerating section. All screens are individual units and are located between flanges of the duct so that the number of screens may be increased or decreased as desired.

An approach section eighteen inches in length completes the installation upstream of the test section.

Each duct section is supported in its own wooden cradle. The individual duct sections are bolted together to form the complete tunnel assembly.

The test section is a straight section 19¼ inches in length mounting the traversing mechanism and probes, and containing the cascade, a center core and nose section, and the mechanism for rotating the cascade. Front and rear views of the test section assembly are shown in Figures 9 and 10. The cascade presently mounted in the tunnel is the inlet guide vane assembly (54 airfoils) taken from an aircraft engine.

The traversing mechanism is designed to permit a radial traverse of the cascade, measuring total pressure and flow angles. Traversing in the tangential direction is accomplished by rotating the cascade. The traversing mechanism is illustrated in detail in Figure 11.

The remaining instrumentation presently contemplated for

measuring total and static pressure upstream of the cascade is outlined in Figure 1.

Discussion of Design Details

The decision to make use of a low speed tunnel was dictated by three considerations: (1) It was desirable to avoid compressibility effects during tests for correlation with theoretical predictions. (2) Several other projects were scheduled to be operated in the M.I.T. Gas Turbine Laboratory high speed duct at approximately the expected time of completion of the annular cascade tunnel. (3) A Navy surplus fan of suitable capacity for the low speed tunnel was available in the Gas Turbine Laboratory.

A preliminary test run of this fan proved satisfactory and it was made the cornerstone of the project.

After several fruitless efforts had been made to obtain a suitable cascade of airfoils for test, and in order to determine the necessary duct dimensions for design purposes, it was tentatively decided to design a set of blades. The General Electric Company, Lynn, Massachusetts, was approached, and offered to manufacture the proposed set of blades and permit their use by the Gas Turbine Laboratory on a loan basis.

Simultaneously, a separate effort resulted in the salvaging of an inlet guide vane assembly from an aircraft engine. The tunnel was designed, therefore, to accomodate the basic dimensions of this

assembly (Cascade A), and the design of the blades to be manufactured (Cascade B) was continued in conformance with the tunnel dimensions.

Since Cascade A was constructed with a 1/8 inch outer shroud, it was considered desirable to keep this shroud out of the airflow in order to avoid excessive local turbulence at the outer diameter. A recess was provided at the forward end of the test section outer casing to accept the shroud. This fixed the inside diameter of the outer casing at $15\frac{3}{4}$ inches. Cascade B was designed without a shroud and its greater chord length precluded any fit into the recessed section. Consequently, Cascade B was designed to a nominal overall diameter of $15\frac{3}{4}$ inches. When this cascade is to be used in the tunnel, the recessed section must be filled by using a 1/8 inch annular ring, 16 inches overall diameter and 1-4/10 inches long, or by filling the cavity with modelling clay.

In addition, Cascade A has a hub-tip ratio of .586 while the hub-tip ratio of Cascade B is .500. The $9\frac{1}{4}$ inch diameter tunnel core was built for use with Cascade A. Therefore, a 7-7/8 inch diameter core must be provided to replace the $9\frac{1}{4}$ inch diameter core when Cascade B is to be installed in the tunnel.

It was planned to avoid the use of a clumsy settling chamber in the tunnel design. The straight sided diffuser section and cone fairing greatly simplified the design and permitted a neat installation. The use of a straightening tube honeycomb at the rear of the diffuser section was planned, if tunnel calibration tests indicated

undesirable rotational flow at the test section. A preliminary tuft survey, however, has indicated an axial flow pattern with negligible rotation, hence the use of a straightening honeycomb appears unnecessary.

In order to make traverses behind the cascade of airfoils in both radial and tangential directions, the traversing mechanism must either travel tangentially around the casing or the cascade must be capable of rotation. The latter solution gave promise of ease of operation and simplicity of construction. The idea of employing a central shaft supported on two bearings manually centered by the use of six bolts tapped through the casing to form two spider supports was first suggested by Mr. Lustwerk, and was adopted after further study. The rotation of the cascade is obtained by the use of a pair of bevel gears operated by a turning bar projecting through one side of the outer casing and fitted with a friction brake. This has the advantage of offering a relatively small additional resistance to the airflow in the test section and keeping the exit clear in the event that it might later be decided to add a diffusing section. A two to one gear tooth ratio permits positioning the cascade tangentially within 1/2 degree or less.

The traversing mechanism is mounted on a pad on the top of the test section outer casing and is secured in place by six set screws. The yawmeter is of the claw type and is rotated by a worm and gear and moved radially by a calibrated threaded bolt. The

traversing mechanism may be located axially in any number of positions, limited only by the number of holes drilled through the mounting pad to allow the probes into the tunnel behind the cascade.

No provisions are presently provided for removing boundary layers. This poses a fairly difficult problem, since annular manifolds must be provided for both inner and outer surfaces of the annulus. The location of the test cascade just aft of a flange, however, should permit the installation of such manifolds if they appear desirable.

No provision is available for obtaining photographic data.

A calculation of the forces expected to be exerted on the cascade by the airflow was made in Phase II for Cascade B. The results, an axial force of 4.9 pounds and a torque of 126 inch-pounds, were used to determine component dimensions required for structural rigidity of the test section assembly. Generally comparable forces may be expected from Cascade A.

Pressure Losses in Tunnel

The design operating point of the fan was determined from the fan performance curves and the following calculation of pressure losses through the tunnel:

Wall friction loss: $\frac{\Delta p_o}{q} = f \frac{L}{D}$ Darcy-Weisbach Equation Ref. (5)

Loss through screens: $\frac{\Delta p_o}{q} = c_w = \frac{\phi^2}{(1 - \phi)^2}$

where ϕ is the blockage ratio Ref. (6)

Core, spider drag losses:

$$\frac{\Delta p_o}{q} = C_D \frac{A_{body}}{A_{duct}}$$ Ref. (8)

where A_{body} is cross section or projected frontal area

Loss through cascade: $\frac{\Delta p_o}{q} = \frac{C_D}{s/c} \quad \frac{1}{\cos^3 \alpha_m}$ Ref. (12)

Assuming incompressible flow, $Q = \frac{AV}{144}$, where $V = C_{x_1}$ ft/sec

Station (See Fig.1)	0	1	2	3	4	5	6	7	8	0
A, sq. in.	∞	430	583	583	195	195	130	130	130	∞
C_x	0	C_{x_1}	.738 C_{x_1}	.738 C_{x_1}	2.20 C_{x_1}	2.20 C_{x_1}	3.31 C_{x_1}	3.31 C_{x_1}	3.31 C_{x_1}	0
q	0	q_1	.544 q_1	.544 q_1	4.84 q_1	4.84 q_1	10.95 q_1	10.95 q_1	10.95 q_1	0

Wall Friction Loss: $\frac{\Delta P_f}{q} = 4\frac{L}{D}$ Darcy-Weisbach Equation Eqn. (7)

Loss through entrance: $\frac{\Delta P_e}{q} = C_e \cdot \frac{K_c}{(2-K)^2}$

where K is the blockage ratio Eqn. (6)

Cone, entire cone losses:

$$\frac{\Delta P_c}{q} = C_D \frac{\text{Cone}}{\text{Area}} \quad \text{Eqn. (8)}$$

where $\frac{\text{Cone}}{\text{Area}}$ is cross sectional projected

Loss through screens: $\frac{\Delta P_s}{q} = \frac{C_s}{\cos^2 \alpha}$ Eqn. (10)

Assuming incompressible flow, $q = \frac{\rho V^2}{144}$, where $\rho = 0.07$ lb/cu ft

Section (See Fig. 3)	0	1	2	3	4	5	6	7	8	9
A_i, sq. in.	∞	130	103	259	155	105	130	130	130	∞
C_i	0	$C_1^{x_1}$	$C_2^{x_2}$	$C_3^{x_3}$	$C_4^{x_4}$	$C_5^{x_5}$	$C_6^{x_6}$	.734 $C_7^{x_7}$	.795 $C_8^{x_8}$	3.44 $C_9^{x_9}$	3.11 $C_{10}^{x_{10}}$	3.12 $C_{11}^{x_{11}}$	3.34 $C_{12}^{x_{12}}$	0
V	0	V_1^0	V_2^0	V_3^0	V_4^0	V_5^0	V_6^0	.394 V_7^0	4.64 V_8^0	10.45 V_9^0	30.49 V_{10}^0	31.05 V_{11}^0	V_{12}^0	0

Assuming standard sea level conditions,

$$\rho_o = .002378 \text{ slugs per cubic foot}$$

Average Reynolds Number = 500,000, $\therefore$ f = .015 , Ref. (5)

Station 1 - 2

$$\frac{\Delta p_o}{\frac{q_1 + q_2}{2}} = .015 \left[\frac{46}{27.25} + \frac{40}{7}\right] = .111$$

$$\frac{\Delta p_o}{q_1} = .086$$

Station 2 - 3

$$\phi = \frac{F_r}{F} = \frac{2 \times 16 \times .010}{1.000} = .32$$

$$C_w = \frac{(.32)^2}{(1 - .32)^2} = .221$$

$$\frac{\Delta p_o}{q_2} = .015 \, (14/27.25) + (7) \, .221 = 1.552$$

$$\frac{\Delta p_o}{q_1} = 1.200$$

Station 3 - 4

$$\frac{\Delta p_o}{\frac{q_3 + q_4}{2}} = .015 \left[\frac{24}{(27.25 + 15.75)/2}\right] = .0154$$

$$\frac{\Delta p_o}{q_1} = .041$$

Station 4 - 5

$$\frac{\Delta p_o}{q_4} = (2)\ C_W = 2 \times .221 = .442$$

$$\frac{\Delta p_o}{q_1} = 2.140$$

Station 5 - 6

$A_{core} = 67.1$ sq.in.

$C_D = (.30)$ Ref. (8)

Drag: $\frac{\Delta p_o}{q_5} = .30 \times 67.1/195 = .103$

Friction: $\frac{\Delta p_o}{q_6} = .015 \left[\frac{18}{15.75} + \frac{15}{9.125}\right] = .037$

Total: $\frac{\Delta p_o}{q_1} = .500 + .406 = .906$

Station 6 - 7

$$C_D = C_{D_p} + .02\ s/l + \frac{.06\ C_L^2}{(l/c)}$$

Estimated Average Drag Coefficient (Cascade B)

$C_D = .02 + .02\ (1.00/3.94) + .06\ (.7)^2\ (1.70/3.94)$

$C_D = .038$

Average $\alpha_m = 15$ degrees (Cascade B)

$s/c = .61$ at mean radius

$$\frac{\Delta p_o}{q_6} = \frac{.038}{.61} \times \frac{1}{(.965)^3} = .069$$

$$\frac{\Delta p_o}{q_1} = .760$$

Station 7 - 8

A_{rods} = 6 (3.25 x .50) = 9.75

A_{shaft} = 3.25 x .75 = 2.44

12.19 sq.in.

C_D = .30 Ref. (8)

$$\frac{\Delta p_o}{q_7} = .015 \left[\frac{19}{15.75} + \frac{19}{9.125}\right] + .30\ (12.19/130)$$

$$\frac{\Delta p_o}{q_7} = .039 + .028 = .067$$

$$\frac{\Delta p_o}{q_1} = .740$$

Station	$\Delta p_o/q_1$
1 - 2	0.086
2 - 3	1.200
3 - 4	0.041
4 - 5	2.140
5 - 6	0.906
6 - 7	0.760
7 - 8	0.740
	5.873 $= \sum \Delta p_o/q_1$

$$\Delta p_o = 5.873\ \frac{\rho_o C_{x_1}^2}{2} \times \frac{1}{144} \times 2.307 \times 12, \text{ inches of water}$$

$$Q = \frac{430}{144}\ C_{x_1} \times 60 \text{ cubic feet per minute}$$

$$\Delta p_o = .00134\ C_{x_1}^2$$

$$Q = 179\ C_{x_1}$$

Eliminating C_{x_1}, with Q in cubic feet per minute,

$$\Delta p_o = .00134 \left(\frac{Q}{179}\right)^2 \text{ inches of } H_2O$$

The design point of the fan is found to be the intersection of the curve of pressure drop and the fan characteristic curve, Figure (5). An airflow capacity of 8500 cubic feet per minute is indicated, resulting in an axial velocity at the test section of 159 feet per second (Cascade A) or 138 feet per second (Cascade B).

Design Drawings

A complete folder of blueprints for the tunnel and cascades is included in copies No. (1) and No. (2) of the thesis. A complete list of the drawing numbers is included here. Copies of all drawings are on file in the MIT Gas Turbine Laboratory.

Drawing Number	Item
N-1210	Bearing Sleeve
N-1211	Collar
N-1212	Quadrant
N-1213	Friction Clamp
N-1214	Mounting Pad
N-1215	Thrust Washer
N-1216	Bevel Pinion
N-1217	Shaft Bearings and Collars
N-2218	Aft Section-Inner Casing
N-3219	Shaft
N-3220	Shaft and Flanges
N-4221	Aft Section-Outer Casing Sub-Assembly
N-1222	Boss
N-1223	Bolt
N-4224	Aft Section Assembly
N-1225	Bevel Gear
N-2226	Traversing Mechanism Assembly
N-1227	Micrometer Head-Traversing Mechanism
N-1228	End Plate - " "
N-1229	Quadrant - " "
N-3230	Base Plate - " "
N-2231	Carriage - " "
N-1232	Worm Gear and Collar- " "
N-1233	Micrometer Head- " "

The daily rules of the Inn is found to be the importation of the sport of gambling they and the observation rules, Figure (4). a fishing capacity of 850 cubic feet per second is immediately available as well as the bulk rating of 139 feet per second (Section 4) as the case may become [Section 8].

Public Service

A complete index of characters for the tunnel its purpose is included in Section 34. (1) and No. (2) of the Rules. A portion of the roofing machine is included here. Copies of all drawings are on file in the Bill for Service Laboratory.


Service Number	Line		
B-1210	Feeding Flume		
B-1211	Valve		
B-1212	Gasket, 8x		
B-1213	Fishing Flume		
B-1214	Measuring Rod		
B-1215	Power Washer		
B-1216	Small Planks		
B-1217	Inlet Pipe, 4x Collars		
B-1218	Air Operation-Heavy Coating		
B-1219	Tools		
B-1220	Small Pan Flange		
B-1221	Air Operation-Fire Coating Sub-assembly		
B-1222	Hose		
B-1223	Bolts		
B-1224	Air Cooling Assembly		
B-1225	Small Gear		
B-1226	Corrective Assembly Assembly		
B-1227	Pipe-Heavy Duty-Fitting Machine		
B-1228	Gas Flume	-	*
B-1229	Assembly	-	*
B-1230	Gas Flume	-	*
B-1231	Coupling	-	*
B-1232	Gas Line End Casing	*	*
B-1233	Pressure Gauge	*	*

Drawing Number	Item
N-1234	Traversing Screw and Worm Shaft-Traversing Mechanism
N-2237	Yawmeter
N-5238	Inlet Guide Vane-Blade Sections (Cascade B)
N-1239	Spacer
N-1240	"
N-1241	"
N-1242	"
N-1243	Nose Piece-Inner Casing
N-4244	Test Assembly-Inlet Guide Vanes (Cascade B)
N-3245	Diffuser Cone
N-5254	Inlet Guide Vane Assembly (Cascade A)
N-5255	Inlet Guide Vane (Cascade A)
N-5256	Annular Cascade Wind Tunnel-Assembly Layout and Casing Details

II THE ANNULAR CASCADE OF AIRFOILS

Two Dimensional Theory of Flow

Consider an annular element in the flow field, of unit axial length. Flow is assumed symmetrical about the axis.

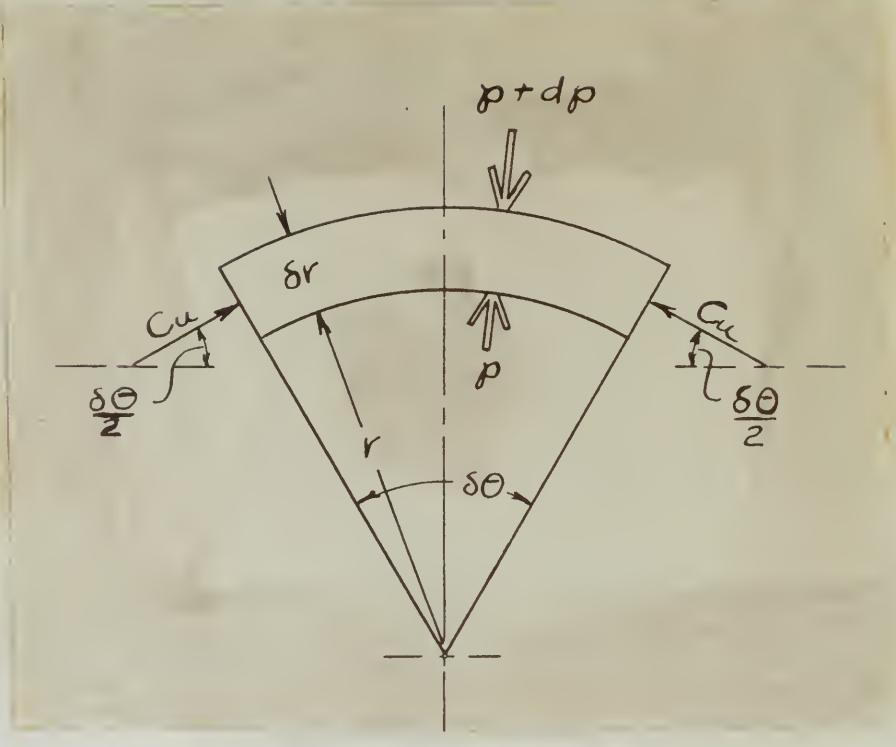

Mass Flow $= \rho C_u \, \delta r$

Summation of Forces in Radial Direction

$$(p + \delta p)\,(r + \delta r)\,\delta\theta = pr\,\delta\theta + (p + \tfrac{\delta p}{2})\,\delta r\,\delta\theta + \rho C_u^2\,\delta\theta\,\delta r$$

$$pr\,\delta\theta + p\,\delta r\,\delta\theta + r\,\delta p\,\delta\theta + \delta p\,\delta r\,\delta\theta - pr\,\delta\theta - p\,\delta r\,\delta\theta - \tfrac{\delta p}{2}\,\delta r\,\delta\theta$$

$$-\rho C_u^2\,\delta\theta\,\delta r = 0$$

D. The Angular Velocity of Airborne

The Gravitational Theory of Flow


Consider an insect climbing in the Flow Field, of unit vertical velocity. Then it receives acceleration (away the axis).

Simplifying and eliminating second order differentials

$$r\,\delta p = \rho c_u^2 \delta r$$

$$\frac{dp}{dr} = \rho \frac{c_u^2}{r}$$

or $$v \frac{dp}{dr} = \frac{c_u^2}{r}$$

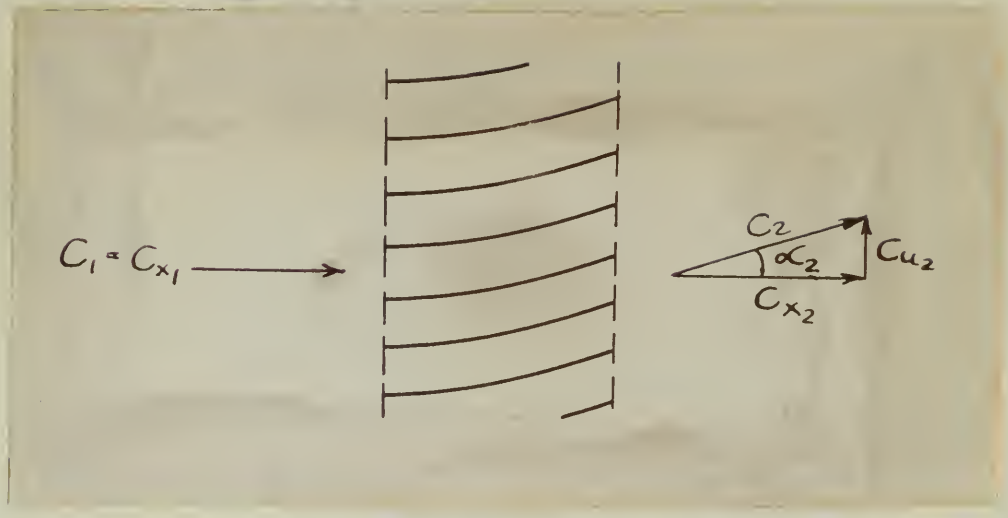

If a cascade of airfoils is placed in the annulus, and adiabatic steady airflow traverses the cascade, the total energy remains constant

$$dq = dh + d\frac{c^2}{2} = 0$$

$$dh = -\,d\frac{(c_x^2 + c_u^2)}{2}$$

For assumed isentropic flow

$$T\,ds = dh - v\,dp = 0$$

$$\therefore\ d\frac{(c_x^2 + c_u^2)}{2} + \frac{c_u^2}{r}\,dr = 0$$

$$2\,\frac{c_u^2}{r} + \frac{d}{dr}\,c_x^2 + \frac{d}{dr}\,c_u^2 = 0$$

$$\frac{d}{dr}\,c_x^2 + \frac{1}{r^2}\,\frac{d}{dr}\,(rc_u)^2 = 0$$



It is further assumed that for the flow through the annular cascade, a point (1) is taken far upstream and a point (2) is taken far downstream, such that

1. $C_1 = C_{x_1}$ = constant at all radii

2. The product of the radius and the tangential velocity at (2) varies as a function of the radius raised to some power, z

$$\frac{r\ C_{u_2}}{r_t C_{u_{2_t}}} = \left(\frac{r}{r_t}\right)^z$$

Then $$\frac{d}{dr} C_x^2 = -\frac{1}{r^2} \frac{C_{u_{2_t}}^2}{r_t^{2z-2}} \frac{d}{dr} r^{2z}$$

$$\frac{d}{dr} C_x^2 = -\frac{2z}{r_t}\left(\frac{r}{r_t}\right)^{2z-3} C_{u_{2_t}}^2$$

Letting $$\frac{r}{r_t} = R$$

$$\frac{d}{dR} C_{x_2}^2 = -2z\, R^{2z-3}\, C_{u_{2_t}}^2$$

$$\int_r^{r_t} d\, C_{x_2}^2 = -2z\, C_{u_{2_t}}^2 \int_R^1 R^{2z-3}\, dR$$

Integrating between r and r_t

$$C_{x_{2_t}}^2 - C_{x_2}^2 = -\frac{2z}{2z-2} \; C_{u_{2_t}}^2 \left(1 - R^{2z-2}\right)$$

$$C_{x_2} = \left\{ C_{x_{2_t}}^2 + \frac{2z}{2z-2} \; C_{u_{2_t}}^2 \left(1 - R^{2z-2}\right) \right\}^{\frac{1}{2}}$$

The continuity equation for mass flow through the cascade, assuming incompressible flow, is

$$\int_r^{r_t} C_{x_1} \; 2\pi r \; dr = \int_r^{r_t} C_{x_2} \; 2\pi r \; dr$$

or, since C_{x_1} is assumed constant at all radii

$$C_{x_1} \int_R^1 R \; dR = \int_R^1 C_{x_2} \; R \; dR$$

$$C_{x_1} \frac{(1 - R^2)}{2} = \int_R^1 \left[C_{x_{2_t}}^2 + \frac{2z}{2z-2} \; C_{u_{2_t}}^2 \left(1 - R^{2z-2}\right) \right]^{\frac{1}{2}} \frac{dR^2}{2}$$

But $C_{u_{2_t}} = C_{x_{2_t}} \tan \alpha_t$

Hence $$\frac{C_{x_1}}{C_{x_{2_t}}} = \frac{\int_R^1 \left[1 + \frac{2z}{2z-2} \tan^2 \alpha_t \left(1 - R^{2z-2}\right) \right]^{\frac{1}{2}} dR^2}{(1 - R^2)}$$

$$\frac{C_{x_1}}{C_{x_{2_t}}} = \frac{\left(\frac{2z \tan^2 \alpha t}{2z-2} \right)^{\frac{1}{2}} \int_R^1 \left[\frac{z(1 - \tan^2 \alpha t) - 1 - R^{2z-2}}{z \tan^2 \alpha t} \right]^{\frac{1}{2}} dR^2}{(1 - R^2)}$$

Integrating

$$\frac{C_{x_1}}{C_{x_{2_t}}} = \left(\frac{z \tan^2\alpha_t}{\frac{z-1}{1-R^2}}\right)^{\frac{1}{2}} \left\{ \frac{R^2}{2}\left(\frac{z(1-\tan^2\alpha t) - 1}{z \tan^2\alpha t} - R^{2z-2}\right)^{\frac{1}{2}} \right.$$

$$\left. + \frac{z(1-\tan^2\alpha t) - 1}{2z \tan^2\alpha t} \sin^{-1} \frac{R^{z-1}}{\left(\frac{z(1-\tan^2\alpha t) - 1}{z \tan^2\alpha t}\right)^{\frac{1}{2}}} \right\}_R^1$$

Also,


$$C_{x_2} = \left[C_{x_{2_t}}^2 + \frac{2z}{2z-2} C_{u_{2_t}}^2 (1 - R^{2z-2})\right]^{\frac{1}{2}}$$

$$C_{u_{2_t}} = C_{x_{2_t}} \tan \alpha t$$

$$\frac{r\, C_{u_2}}{r\, C_{u_{2_t}}} = \left(\frac{r}{r_t}\right)^z$$

Thus, by assigning desired values to z and α_t, the velocity pattern may be determined for all blade radii.

Forces on an Airfoil in Cascade

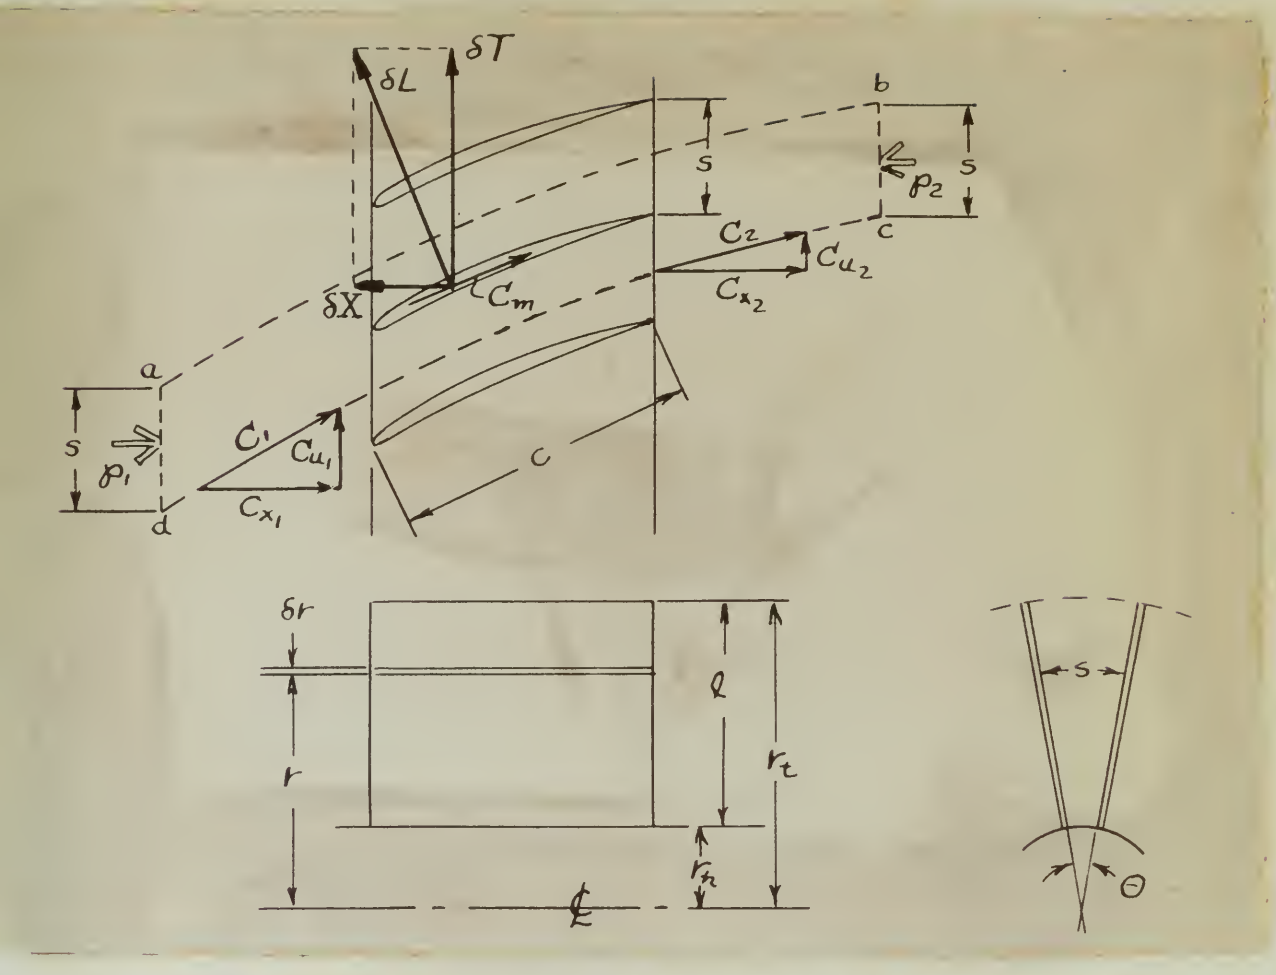

At any given radius, r, a control surface abcd is drawn around an airfoil of the cascade. Flow is assumed isentropic and incompressible. If radial flow is also assumed negligible


Mass flow, $\delta w = \rho C_{x_1} \cdot s \cdot \delta r = \rho C_{x_2} \cdot s \cdot \delta r$

$$\therefore \quad C_{x_1} = C_{x_2}$$

$$-\delta T = \delta w (C_{u_1} - C_{u_2})$$

$$\delta X = \delta w (C_{x_2} - C_{x_1}) + (p_2 - p_1) \cdot s \cdot \delta r$$



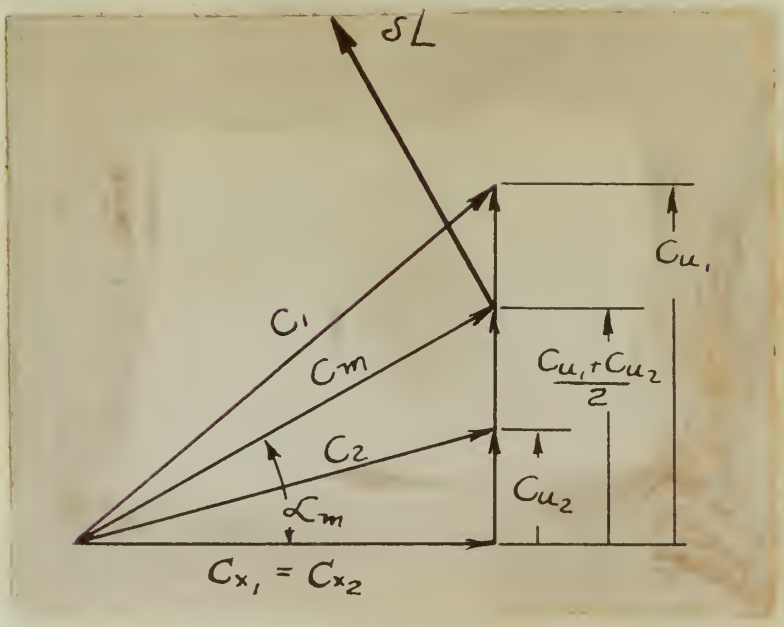

$$\tan \alpha_m = \frac{\delta X}{\delta T} = \frac{\frac{C_{u1} + C_{u2}}{2}}{C_x}$$

$$\delta L = \sqrt{\delta X^2 + \delta T^2}$$

$$\delta L = \delta T \sqrt{\left|\frac{\delta X}{\delta T}\right|^2 + 1}$$

$$\delta L = \frac{\delta T}{C_x} \sqrt{\left|\frac{C_{u1} + C_{u2}}{2}\right|^2 + C_x^2}$$

$$\delta L = \frac{\rho C_x \, s \, \delta r (C_{u1} - C_{u2})}{C_x} \sqrt{C_m^2}$$

$$\delta L = \rho C_m \, s (C_{u1} - C_{u2}) \, \delta r$$


By airfoil theory

$$\delta L = C_L \frac{\rho}{2} C_m^2 \, c \, \delta r$$

$$\therefore C_L = \frac{2 \, s/c \, (C_{u1} - C_{u2})}{C_m}$$



If radial flow is appreciable, then $C_{x_1} \neq C_{x_2}$

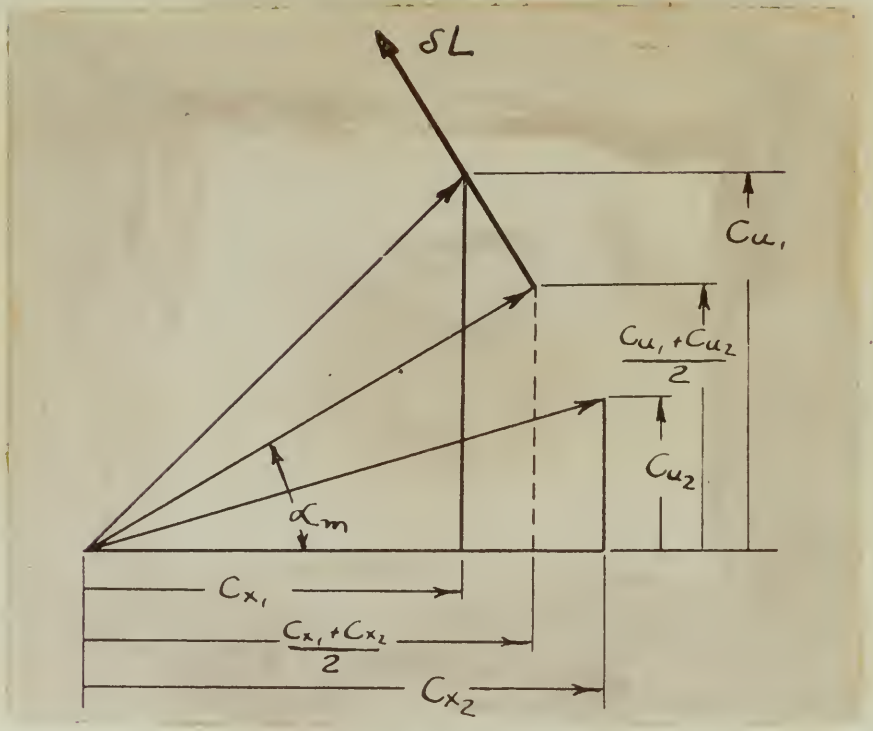

$$\tan \alpha_m = \frac{\delta X}{\delta T} = \frac{\frac{C_{u_1} + C_{u_2}}{2}}{\frac{C_{x_1} + C_{x_2}}{2}}$$

$$C_m = \sqrt{\left(\frac{Cu_1 + Cu_2}{2}\right)^2 + \left(\frac{C_{x_1} + C_{x_2}}{2}\right)^2}$$

For inlet guide vanes, entering flow is axial and $C_{u_1} = 0$

$$\therefore \quad C_L = \frac{2 \, s/c \; C_{u_2}}{\sqrt{\left(\frac{C_{u_2}}{2}\right)^2 + \left(\frac{C_{x_1} + C_{x_2}}{2}\right)^2}}$$



Now $s = r\theta$, where $\theta = \frac{2\pi}{N}$ (Number of Vanes)

$$C_L = \frac{4\pi r}{Nc} \cdot \frac{C_{u_2}}{\sqrt{\left(\frac{C_{u_2}}{2}\right)^2 + \left(\frac{C_{x_1} + C_{x_2}}{2}\right)^2}}$$

Cascade A

Cascade A is the inlet guide vane assembly from an aircraft engine. It consists of 54 airfoils welded between an inner and an outer shroud, and was originally split on a diameter into two assemblies. In order to mount the cascade in the tunnel the two halves were brazed together to form a single assembly. This assembly was fitted on a wooden disk and held in axial position on the central shaft in the tunnel by means of bolts through the wooden disk. The assembly is best shown on Drawing Nos. N-5254 and N-4224.

The blade profile and planform are shown in Figure (3). Design velocity triangles at hub and tip and variation of turning angle with radius are also shown on Figure (3).

The radius at the blade root is 4.625 inches and the tip radius is 7.875 inches, giving a hub-tip ratio, $R_o = .5875$.

$$\frac{r_h C_{u_{2h}}}{C_{x_1}} = r_h \tan \alpha_{2h} = 2.65$$

$$\frac{r_t C_{u_{2t}}}{C_{x_1}} = r_t \tan \alpha_{2t} = 6.90$$

$$\frac{r_h C_{u_{2h}}}{r_t C_{u_{2t}}} = \frac{2.65}{6.90} = .384$$

$$\theta = \frac{2\pi}{3} \text{ (Answer in Radians)}$$

$$\sigma_b = \frac{Mc}{I}$$

$$\sqrt{\left(\frac{Mc}{I}\right)^2 + \left(\frac{Vc}{I}\right)^2}$$

Example 1

Example 1 is the third wide flange cantilever type in statically indeterminate. It consists of an eccentric axial compression as shown and an eccentric shearing load were originally applied on a diagonal line and subsequently. In order to avoid the algebra in the case having the two forces were brought together in pairs - single somewhat. This somewhat was given on a problem like and this is still possible on the critical point to the moment is almost of small although the answer close. The assembly is just almost on loading zero. P=50kl and P=12k.

The plastic condition and plastics are shown in Figure (3).

Having velocity flexibility it can obtain the resolution of loading and with replace are clear shown on Figure (3).

The ratios of the plastic zone is P=50k loaded and the bit reduce is 7.17) having plastic a hub-tip ratio, $\beta^2 = .3975$.

$$\frac{\sigma_b}{\sigma_a} = \frac{\sigma_b}{\sigma_a} \text{ and } \alpha_{\sigma} = 1.42$$

$$\frac{\sigma_b}{\sigma_a} = \frac{\sigma_b}{\sigma_a} \text{ and } \alpha_{\sigma} = 1.43$$

$$\frac{\sigma_b}{\sigma_a} = \frac{2.69}{6.30} = .384$$

$$\frac{r_h C_{u_{2h}}}{r_t C_{u_{2t}}} = (R_o)^z$$

$$.384 = (.5875)^z$$

$$\therefore \quad z = 1.8$$

It is interesting to note here that for free vortex flow, $z = 0$; for "solid body" rotational flow, $z = 2$; and Cascade B is designed with $z = 3$.

Cascade B

Cascade B was designed using the three dimensional theory of Appendix A. It consists of 36 airfoils retained in a central disk. The tip radius is 7.875 inches and the hub radius is 3.938 inches, giving a hub-tip ration, $R_o = .5$.

A cubic variation of circulation with blade radius is obtained by setting $z = 3$, in order to provide a severe test of theory. The turning angle at the tip was arbitrarily set at 45 degrees as representing the maximum that could be obtained with the available value of solidity and with a moderate lift coefficient.

The number of blades was selected as a compromise to give a good approximation to the infinite requirement of the three dimensional theory without excessive manufacturing cost. The blades were tapered linearly from tip to hub to obtain suitable values of lift coefficient.

After selection of these design parameters, the design

proceeded as follows:

Design constants:

$z = 3$

$\alpha_{2t} = 45^\circ$ at $r_t = 7.875$ inches

$R_o = .5$

$N = 36$

R	c	s	s/c
1.0	2.000	1.373	.685
.9	1.875	1.236	.660
.8	1.750	1.100	.630
.7	1.625	.962	.591
.6	1.500	.825	.550
.5	1.375	.687	.500

From the previous development of cascade theory, substituting these design constants

$$\frac{C_{x_1}}{C_{x_{2t}}} = \frac{\left(\frac{3\tan^2 45^\circ}{2}\right)^{\frac{1}{2}}}{(1 - R_o^2)} \left[\frac{R^2}{2} \left(\frac{3(1-\tan^2 45^\circ) - 1}{3\tan^2 45^\circ} - R^4 \right) \right.$$

$$\left. + \frac{3(1-\tan^2 45^\circ) - 1}{3\tan^2 45^\circ} \sin^{-1} \frac{R^2}{\frac{3(1-\tan^2 45^\circ) - 1}{3\tan^2 45^\circ}} \right]_{R_o}^{1}$$

$\frac{C_{x_1}}{C_{x_{2t}}} = 1.35$, or $C_{x_{2t}} = .741\, C_{x_1}$

Also, $C_{x_{2t}} = C_{u_{2t}} = .741\ C_{x_1}$

Dimensionless Coefficients:

Design constants:

$$n = 3$$

$$C_{Ep} = 15^{\circ} \text{ at } R^{2} = 7.871 \text{ inches}$$

$$\beta^{0} = .3$$

$$\theta = 36$$

θ	n	β	α/c
1.0	2.000	1.273	.637
.9	1.675	1.236	.660
.8	1.720	1.173	.640
.7	1.659	.940	.567
.6	1.900	.809	.530
.5	1.375	.647	.500

From the Derivations developement of exercise theory, Aerodynamic

Sheet design constants

$$\frac{C_{Y}^{2}}{C_{D}^{2}} = \frac{\left(\frac{n}{2}\right)}{(1 - \beta_{0}^{2})} \left[\frac{n}{2} \left(\frac{3 \tan^{2} \theta_{0}}{3(1-\tan^{2} \theta_{0}) - 7} \right) - \delta_{4} \right]^{\frac{1}{2}}$$

$$+ \frac{3(1-\tan^{2} \theta_{0})}{3 \tan^{2} \theta_{0}} - \frac{\pi}{2} \left[\frac{\frac{n}{2}}{\frac{3(1-\tan^{2} \theta_{0})}{3 \tan^{2} \theta_{0}} - 1} \right]^{\frac{1}{2}}$$

$$\frac{C_{D}^{2}}{C_{D}^{2}} = 1.85^{\circ} \text{ or } C_{D}^{2} = .711 \, C_{L}^{2}$$

$$\tan^{-1} C_{D}^{0} = C_{D}^{0} = .711 \, C_{L}^{2}$$

$$C_{x_2} = .741\, C_{x_1} \left[1 + \frac{3}{2}(1 - R^4)\right]^{\frac{1}{2}}$$

$$C_{u_2} = .741\, C_{x_1} R^2$$

$$\tan \alpha_2 = \frac{C_{u_2}}{C_{x_2}}$$

But, from Appendix A, it is recalled that the blade performs as if it were in a flow field, C_m.

Therefore

$$\tan \alpha_{2_{design}} = \frac{C_{u_2}}{\frac{C_{x_1} + C_{x_2}}{2}}$$

$$C_L = 4\pi r_t \frac{R}{Nc} \frac{.741\, C_{x_1} R^2}{\frac{.741\, C_{x_1}}{2} \sqrt{R^4 + \left[\left(\frac{5}{2} - \frac{3}{2} R^4\right)^{\frac{1}{2}} + \frac{1}{.741}\right]^2}}$$

$$C_L = \frac{8\pi r_t}{Nc} \frac{R^3}{\sqrt{4.32 - \frac{R^4}{2} + 2.70 \left(\frac{5}{2} - \frac{3}{2} R^4\right)^{\frac{1}{2}}}}$$

R	C_{u_2}	C_{x_2}	C_m	α_m	α_2	$\alpha_{2\ design}$	C_L
1.0	$.741C_{x_1}$	$.741C_{x_1}$	$.947C_{x_1}$	23.0°	45.0°	40.4°	1.07
.9	.600	.911	1.001	17.4	33.4	32.2	.79
.8	.474	1.018			25.0	25.2	.57
.7	.363	1.082	1.055	9.9	18.6	19.2	.41
.6	.267	1.124			13.4	14.1	.27
.5	.185	1.150	1.080	4.9	9.15	9.75	.17

Four sections are determined, at R = 1.0, .9, .7, and .5. The basic section for the blade is taken from reference (3), increased

β	C_{D_0}	C_{D_i}	C_D	α_w	α_i (radians)	C_L
1.0	.0410	.7126	.0476	33.0°	45.0°	1.07
.9	.040	.711	1.001	17.4	39.4	52.3
.8	.038	1.018			45.0	56.=
.7	.035	1.080	1.094	9.9	34.4	53.2
.6	.037	1.124			43.4	14.1
.5	.049	1.120	1.000	4.9	9.13	9.73

Four positions are considered, as $\beta = 1.0$, .9, .7, and .5.

The angle involving the two bodies is taken from reference (3), interpolated

in thickness from 6% to 10% for manufacturing purposes. This section is designated 64(B)-10. It is an experimentally derived section and gives the required turning angle at R = 1.0 with peak-free pressure distribution. In order to achieve a smoothly faired blade, the remaining sections are obtained from the basic section by an empirical construction based on the tangent to the mean camber line at the trailing edge. The distribution of camber and thickness along the chord are held constant while the camber is reduced to give the desired turning angle. The thickness ration of ten percent remains constant.

Comparison is made to other referencesto validate the choice of section, as follows:

$$C_L \begin{pmatrix}\text{isolated}\\ \text{airfoil}\end{pmatrix} = \begin{pmatrix}\text{Slope of } C_L\\ \text{vs. Angle of}\\ \text{Attack Curve}\end{pmatrix} \times \left(\begin{pmatrix}\text{Angle}\\ \text{of}\\ \text{Attack}\end{pmatrix} - \begin{pmatrix}\text{Angle of}\\ \text{Attack,}\\ \text{Zero Lift}\end{pmatrix} \right)$$

(1) $$C_{L_{\begin{pmatrix}\text{isolated}\\ \text{airfoil}\end{pmatrix}}} = a_o \left[(\alpha_m - \sigma) - \alpha_{L_o} \right]$$ Ref. (7)

where α_{L_o} is determined by construction Ref. (8)

(2) $$C_{L_{cascade}} = C_{L_{\begin{pmatrix}\text{isolated}\\ \text{airfoil}\end{pmatrix}}} \times \frac{2s/c}{\pi \cos \alpha_2} ,$$ Ref. (12)

(3) $$\delta = \theta \sqrt{\frac{s}{c}} \left[.23 \left(\frac{2a}{c} \right)^2 + \frac{.10 \alpha_2}{500} \right] ,$$ Ref. (9)

Another value of δ for comparison is taken from reference (14).

is Boldsmeer Type 66 to 10% for monochromatic purposes. This setting is designated 66(3)-10%. It is an experimentally derived setting and gives the required Compton angle at $R = 2.0$ with peak-free operation of electrometer. In order to achieve a reasonably fairly flood flash, the remaining neutrons are deflected from the beam position by an additional counterweight placed on the diagonal to the usual deflector line at the leading edge. The distribution of counter and shielding along the beam are held constant while the number is reduced to give the desired working angle. The schematic design of ion process chamber

constant.

Observation is made to obtain measurements relative the energy of neutron, as follows:

$$E_n^{(\text{relative})} = \text{Energy of } Q_n \text{ at } \left(\begin{array}{c}\text{angle of}\\ \text{ref. angle of}\\ \text{above curve}\end{array}\right) - \left(\begin{array}{c}\text{angle of}\\ \text{flood}\\ \text{zero tilt}\end{array}\right)$$

$$(1) \quad Q_n^{(\text{neutron})} = \text{Energy of } Q_n \text{ at } \left(\begin{array}{c}\text{angle of}\\ \text{ref. angle of}\\ \text{above curve}\end{array}\right) - \left(\begin{array}{c}\text{angle of}\\ \text{flood}\\ \text{zero tilt}\end{array}\right)$$

$$(1) \quad Q_n^{(\text{neutron})} = E_{\text{neutron}}^{(\text{neutron})} \left[\left(\alpha^{E_n} - \alpha \right) - \alpha^{E_n} \right]$$

where, α^{E_n} is determined by construction

$$(2) \quad E_{\text{neutron}}^{(\text{neutron})} = E_n^{(\text{neutron})} \times \frac{\mu \cos \alpha^{E_n}}{\tan \alpha} ,$$

$$(3) \quad Q = \Theta \sqrt{\frac{E}{2}} \left[.23 \left(\frac{E}{2m} \right)^2 + \frac{.20 \alpha^2}{2m} \right] ,$$

another value of Q for neutrons is less than zero reference

(12).

All constructions were made to a scale of ten to one to insure reasonable accuracy. Some slight compromises were necessary during the layout to obtain smooth contours between blade sections. In addition, the thickness of the trailing edge was increased to .015 inches for manufacturing purposes.

A comparison of the lift coefficients and outflow angles of the derived sections, as determined from the above sources are compared with the design values in the following table:

R	1.0	.9	.7	.5	Remarks
Camber (%)	12.1(1)	8.9 (2)	7.2 (2)	4.8 (2)	(1) Ref. (3) (2) Empirical Constr.
σ	-27.0°(1)	-22.4°(2)	-13.2°(2)	-4.° (2)	
$\alpha_m - \sigma$	4.°	5.°	3.3°	-0.9°	
θ	68.0°	55.5°	44.3°	33.8°	Constr.
α'_1	21.0°	18.0°	18.8°	20.8°	Constr.
α'_2	-47.0°	-37.5°	-24.5°	-13.°	Constr.
α_{L_o}	-13.4°	-9.9°	-6.5°	-	Constr. Ref.(8)
a_o	.105	.105	.105	-	(3) Eqn. (1) (4) Ref. (7)
C_L isolated airfoil	1.83(3)	1.56 (3)	.81(3)	.41(4)	
C_L cascade	1.04	.78	.42	.127	Eqn. (2)
C_L design	1.07	.79	.41	.17	Page 30
δ	6.8°(1)	5.3°	4.3°	3.25°	Empirical Constr.
δ	8.3°	6.6°	5.0°	3.5°	Eqn. (3)
δ	8.7°	7.0°	5.4°	3.3°	Ref. (14)
α_2	-40.2°(1)	-32.2°	-20.2°	-9.75°	Empirical Constr.
α_2	-38.7°	-30.9°	-20.5°	-9.50°	Ref. (9)
α_2	-38.3°	-30.5°	-20.1°	-9.70°	Ref. (14)
α_2 design	-40.4°	-32.2°	-19.2°	-9.75°	Page 30

Ordinates of the mean camber line of the four sections, measured from the chord line, are tabulated in Table I. Ordinates of the four section profiles, also measured from the chord line, were determined from layouts and are tabulated in Table II.

A calculation of the forces acting on this cascade was made, for use in designing components of the annular cascade tunnel such as

shafts, bevel gears, and friction brake. Since an exact figure was not required, the assumption was made that $C_{x_1} = C_{x_2}$ in order to simplify the calculation, particularly in the case of determining the axial force, X.

Axial Force X

From Page

$$\delta X = \delta w \, (C_{x_2} - C_{x_1}) + (p_2 - p_1) \, s \, \delta r$$

Applying the above assumption,

$$\delta X = (p_{o_2} - p_{o_1}) - \frac{\rho}{2} (C_2^2 - C_1^2) \quad s \, \delta r$$

$$dX = -\frac{\rho}{2} C_{u_2}^2 \; s \; dr$$

and $C_{u_2} = .741 \, C_{x_1} \, R^2$

$$X = -\frac{\rho}{2} s \, r_t \int_{.5}^{1.0} (.741 \, C_{x_1} \, R^2)^2 \, dR$$

$$X = -\frac{\rho}{2} s \, r_t \, (.741 \, C_{x_1})^2 \left[\frac{R^5}{5} \right]_{.5}^{1.0}$$

For $\rho =$ .002378 slugs/cu.ft.

$s_{avg} = 1.031/12$ feet

$$X = -.715 \times 10^{-6} \, C_{x_1}^2$$

$C_{x_1} = 138$ feet per second (See page 17)

$C^{(1)}$ = 326 lbm/hr-mole (See page 12)

$$\varepsilon = -.134 \times 32.2 \, g_c^{ft}$$

$$f^{cyl} = 1.01(1/2) \text{ Cast}$$

$\mu_{air/cyl} = .00287$ slugs/ft-hr.

$$I = -\frac{1}{2} \times \pi^2 \, (.782 \, D^{ft})_2 \left[\frac{2}{N_2} \right]_{1.0}^{3}$$

$$T = -\frac{1}{2} \times \pi^2 \int_{1.0}^{3} (.782 \, D^{ft} \, N_2)_2 \, dN$$

$$\text{and } D^{ft} = .782 \, D^{ft} \, g_c$$

$$\Omega = -\frac{1}{2} \, D^{ft} \, \varepsilon \, dx$$

$$Q_1 = (pv^2 - pv_1^2) - \frac{1}{2} \left(\frac{v^2}{g_c} - \frac{v_1^2}{g_c} \right) = Q\tau$$

Applying the above relationship

$$Q_2 = Q_1 + (U^2 - U_1^2) + (p^2 - p_1^2) = Q\tau$$

Heat Flow

Axial Force Σ

the axial force, Σ.

simplify the calculation, particularly in the case of determining not required, the assumption was made that $D^{ft} = D^{in}$ In order to

angles, bowl ports, and friction drops. Items in steps figure may

$X = -.136$ pounds/blade

X (Total) $= -4.9$ pounds

Torque Force, T

$$-\delta T = \delta w \, (C_{u_1} - C_{u_2})$$

$$-dT = -\rho C_{x_1} \, s \, r_t \, C_{u_2} \, dR$$

$$T = \rho C_{x_1} \, s \, r_t \int_{.5}^{1.0} .741 \, C_{x_1} \, R^2 \, dR$$

$$T = .741 \rho C_{x_1}^2 \, s \, r_t \left[\frac{R^3}{3} \right]_{.5}^{1.0}$$

$$T = 29 \times 10^{-6} \, C_{x_1}^2$$

$T = .552$ pounds/blade

*Torque/blade $= .552 \times .8 \times 7.875$

Torque/blade = 3.5 inch-pounds

Torque (Total) = 126 inch-pounds

*$.8 \, r_t$ taken as center of forces since turning angle is increasing toward tip of blade.

$$\Sigma = -.730 \text{ pounds/inch}$$

$$\Sigma \text{ (about)} = -2.9 \text{ pounds}$$

Counter force, $\underline{T}$

$$-52 = \varepsilon_N (\sigma^{in}_T - \sigma^{out}_T)$$

$$-\Omega = -\gamma_0 \sigma^T + \pi^\beta \rho^{in} \, dz$$

$$\Sigma = \gamma_0 \sigma^T + \pi^\beta \int_{-.5}^{.5} .7\gamma_3 \, \sigma^T \, R_p \, dz$$

$$\Sigma = .7\gamma_3 \rho \sigma^2_T + \pi^\beta \left[\frac{z}{R_p}\right]_{-.5}^{.5}$$

$$\Sigma = 52 + 10_{-4} \sigma^T_2$$

$$\Sigma = .732 \text{ pounds/inch}$$

$$\text{Mg-ring/Disk} = .5\gamma_0 \pm .0 \pm 7.3\gamma_5$$

$$\text{Torque/Disk} = 7.2 \text{ inch-ounce}$$

$$\text{Torque (Total)} = 110 \text{ inch-pounds}$$

---

*3 τ^β Values at center of lower disc, scaling angle is inverse- ly proportional to pressure.

III EXPERIMENTAL INVESTIGATION

Results

It has been previously noted that the design and construction aspects of the current project were not completed until mid-April 1949. After installation and adjustment the equipment was ready for calibration early in May and a temporary manometer setup was improvised in order to obtain some preliminary data. Test runs were made during the second week in May and approximately three hundred and fifty test points were taken and recorded. It should be emphasized, however, that these data should be regarded as tunnel calibration data rather than as accurate information applied to the performance of the cascade.

Results of the tunnel survey, with the cascade removed are presented in Figure 6. These tests indicate a good velocity profile at the test section of the tunnel. Boundary layer thicknesses are of the order of 1/2 inch at the outer wall, and 3/8 inch at the inner core. Since inlet guide vanes to an aircraft engine must be designed to operate in a duct where a similar build-up of boundary layer must be expected, this is not presently considered objectionable. The magnitude of the absolute velocity at the test section appears considerably lower than the calculated value, when using a manometer vented to ambient static pressure. The true tunnel velocity cannot be determined until provisions are available for obtaining the static pressure in the test section.

III EXPERIMENTAL INVESTIGATION

Results

Maximum rotation of the flow was 2½ degrees, near the outer diameter. Since a satisfactory method for zeroing the yawmeter in the true axial direction has not yet been developed, the zero setting was established by line of sight. Since there is no reason for the airflow to rotate in opposite directions at inner and outer radius, as might appear from Figure 6, it is assumed that the flow at the inner radius is axial, and a one degree correction is added to all subsequent yawmeter readings. This appears to be of the correct order of magnitude for the accuracy to be expected from the sighting method used for zeroing the yawmeter.

With Cascade A placed in the tunnel, radial traverses were made at .100 inch intervals over an arc of 12 degrees. Tangential traverses were made at one degree intervals over an arc of 14 degrees, at .500 inch radial intervals. Representative flow characteristics are presented in Figure 7.

The results are generally excellent judged on the basis of reproducibility and cyclic repetition. A comparison of these preliminary data with the design values for Cascade A is made in Figure 3, but no conclusions are drawn from these early findings.

It is apparent that some separation is occurring from the upper surface of the airfoil, thus reducing the outflow angle in this region. Total pressure losses are relatively low in this region. As the wake region behind the trailing edge is traversed from upper surface to lower surface, the turning angle increases sharply, accompanied

by a loss in total pressure, indicating a considerable boundary layer on the lower surface of the airfoil. Between these regions, across an arc of 2-3 degrees (airfoils are spaced 6.67°), the outflow angle is relatively constant, and pressure losses are low. The outflow angle in this central region is taken as the average outflow angle for the comparison on Figure 3.

Within the boundary layer at both the inner and the outer tunnel walls, the outflow angle increases sharply. It seems probable that secondary flow circulation from the lower surface of one airfoil to the upper surface of the adjacent airfoil may cause the considerable increase in turning angle in these regions of low velocity.

Much additional data must be obtained on Cascade A and Cascade B, when it is built, before any valid conclusions may be drawn concerning the correlation of the experimental results with the theory outlined in Appendix A.

Suggestions for Further Work

As a result of the preliminary test runs, the following suggestions are offered to improve the performance of the tunnel and enhance the value of future experimental investigations:

1. Complete instrumentation.

2. Determine true axis of tunnel and scribe inside of test section outer casing in order to properly zero yawmeter in axial direction.

3. Provide a vernier on indicating quadrant of cascade rotating mechanism to permit accurate setting to tenths of a degree.

4. Reduce friction in cascade rotating mechanism and eliminate backlash in system when rotating cascade to left (viewed from rear). No significant backlash exists when cascade is rotated to right.

5. Reduce roughness and fitting irregularities in the vicinity of the cascade.

6. Remove or reduce boundary layer by use of annular manifolds, or possibly by shortening the approach section preceding the test section.

7. Seal plywood spacers separating screens to prevent air leakage from the tunnel.

8. Possibly add a low resistance straightening honeycomb in an attempt to eliminate the slight flow rotation.

APPENDIX A

VORTEX THEORY OF ANNULAR CASCADES*

The vortex theory of airfoils and propellers may be applied to the flow through an annular cascade (Ref. 15). Assuming incompressible flow, in the case of a ring of blades designed to give free vortex flow downstream the blades may be replaced by vortices bound to the respective locations of the blades. Each blade may be represented by a single vortex line whose circulation, Γ, is independent of radius and whose axis is a straight line which intersects the axis of the annulus, Fig. 1A. A uniform axial velocity, C_x, is superimposed on the velocities produced by the bound vortices. A path ABCDA enclosing one blade and following similar streamlines in adjacent blade passages will have a circulation $2\pi rC_u/Z$ where Z is the number of blades. Since the circulation, Γ, is constant, rC_u is constant and the downstream flow, being additionally one with constant entropy and stagnation enthalpy, must be free vortex.

The representation above does not give a complete picture of the flow. The influence of such bound vortex lines downstream at infinity is negligible, but the circulation along a path, BCB, enclosing the hub or cylinder which forms the inner wall of the

---

*This development by Dr. W. R. Hawthorne, George Westinghouse Professor of Mechanical Engineering, Massachusetts Institute of Technology, Cambridge, Massachusetts.

APPENDIX A

Finite Theory of Aerofoil Interference

The vortex theory of aerofoil and propellers may be applied to the flow through an annular cascade (Ref. 13). Assuming irrotational flow, in the case of a ring of blades replaced by a ring vortex flow downstream the blades may be considered to arise from an impressed distribution of vortex sheets. Each blade may be represented by a "bound" vortex line across the annulus, Γ, in combination with a "trailing" vortex sheet (whose axis is a cylindric line coincident with the axis of the annulus, Fig. 11. A uniform axial velocity, C_a, is superimposed on the velocities induced by the vortex sheets. A path cycle containing one blade and following similar streamlines is sufficient which passes all round a circumference $2\pi r_0$ where r is the radius of station. Since the circulation round the cycle, Γ, is constant and the vortex flow, being entirely due to vorticity and therefore is subject to potential symmetry and theorems entirely, must be free vortex.

The requirements above does not give a complete picture of the flow. The influence of such vortex lines themselves is unlikely to negligible, but the circulation along a path, $2\pi r_0$, including the two or opposite sides form the lower limit of the

---

While development by L. A. Jacobsen, Cornell Aeronautical Laboratory, Inc., Report of Previous Unpublished Information, Aeronautical Engineering Problems of Propulsion, Cornell, mimeographed.

annulus equals $2\pi r C_u = Z\Gamma$. Therefore in representing the conditions at infinity it is necessary to turn the vortex lines replacing the blades through a right angle and let them trail off downstream enclosed within the inner wall of the annulus. If the trailing vortices pass downstream along the axis of the annulus and the bound vortices pass radially to infinity then the boundary condition of no radial velocity is satisfied at the inner and outer walls up and downstream at infinity and in the plane of the bound vortices representing the blades. For a finite number of blades the condition of zero radial velocity at the walls is not satisfied elsewhere and it does not appear possible to obtain a simple vortex representation of the flow for a finite number of blades. For an infinite or large number of blades the vortex representation of Fig. 2A along with a superimposed axial velocity gives stream surfaces which are concentric cylinders everywhere and satisfies the conditions of flow. This method of representing the flow for a cascade designed to give free vortex flow downstream may be extended to other types provided the number of blades is large.

Considering the case where the circulation varies along the blade span, a vortex sheet of strength $d\Gamma/dr$ per unit radial length trails downstream off the blade. To satisfy the boundary conditions at the walls each filament of these trailing vortex sheets requires multiple reflection in the walls. A number of equivalent diagrams may be drawn of which Fig. 3A is an example. In this figure

the circulation around each blade increases from a value Γ_h at the hub (inner wall). Each blade and its trailing vortices are represented by a bound vortex of circulation Γ_h extending from the axis radially to infinity, and a system of appropriate horseshoe vortices, each horseshoe vortex being of strength $d\Gamma/dr$ per unit radial length and combining with the bound vortex in the sense required to give the desired circulation. At the axis the bound vortex trails off downstream as above in order to reproduce the boundary conditions at the inner wall. In this example each of the existing trailing vortices is part of the horseshoe formed by reflecting it in the outer wall. This system is reflected in the inner wall, giving a system which in turn is reflected in the outer wall and so for an infinite number of reflections. The reflection in each wall is performed so that the product of the radius of the vortex and the radius of its reflection is the square of the radius of the wall in which it is reflected.

The trailing vortices lie along stream lines and therefore wind downstream along the annulus in approximately helical paths. With a superimposed axial velocity equal to the axial velocity upstream at infinity this system will represent the flow through an annular cascade consisting of a large number of blades. The circulation on any stream surface downstream at infinity is equal to the circulation $Z\Gamma$ at the radius at which this stream surface passes through the blades. In Fig. 4A is illustrated the procedure

for proving this. Along the path ABCDA in which AB and CD are adjacent stream surfaces and the flow through the circle ADA equals that through BCB the circulation enclosed is $Z\Gamma$. This may be demonstrated by developing the surface ABCD and noting that it encloses all the blades. Now if AB and CD are made practically identical stream lines the contribution to the circulation from AB cancels that from CD. There is no contribution from AD if this is located far upstream, hence the circulation enclosed by BC is equal to $Z\Gamma$. The picture of the flow in Fig. 3A clearly satisfies this since contributions from complete horseshoe vortices enclosed by BC cancel out and the circulation equals that of the axial trailing vortices and those horseshoe trailing vortices of which only one trailing portion is within the circuit BC.

Only one blade and its associated trailing vortices is shown in Fig. 3A. The boundary conditions at the annulus walls, however, are satisfied everywhere only by an infinite number of blades with this representation. For this case the flow is axially symmetric and the trailing vorticity is distributed throughout the flow field. The vortex lines following the stream lines may be regarded as distributed uniformly over stream surfaces coaxial with the annulus. Due to the effect of velocities induced by one vortex surface on the other such stream surfaces are not generally cylindrical except at large distances from the blades. The approximately helical vortices in each stream surface may be resolved into components

in the tangential direction and components following the stream surface in an almost axial direction. Hence, the trailing vortices may be considered as a system of ring (or smoke ring) vortices and a system of vortices following the generating lines of the stream surface.

The radial velocities are largely induced by the ring vortices, the contributions from the vortices following the generating lines being small due to their small components in the radial direction. At a large distance downstream from the blades the stream surfaces become concentric cylinders, the generating line vortices induce no radial velocities, and the radial velocities induced by an infinite set of ring vortices similar to those of Fig. 5A is zero.

If it is assumed that the radial velocities are so small that the trailing vortices lie on concentric cylindrical surfaces, the velocities induced in the plane of the blades may be compared with those induced downstream at infinity in the following manner (Reference 11). The axial components of the trailing vortices, Fig. 6A, being uniformly distributed over the surface of a cylinder induce only tangential velocity components and no radial or axial components. Since the bound vortices induce no velocities either in their plane or at infinity, the induced velocity at the plane of the blades due to the semi-infinite axial vortices is half that induced by this

vortex system at an infinite distance downstream. If C_{u_1} and C_{u_2} are the tangential velocities at infinite distance upstream and downstream of the blades respectively, the induced tangential velocity due to the axial components of the vortices trailing from the blades is $(C_{u_2} - C_{u_1})$. The induced velocity due to these components at the blades is $(C_{u_2} - C_{u_1})/2$ and the tangential velocity in the plane of the blades will be $C_{u_1} + (C_{u_2} - C_{u_1})/2 = (C_{u_2} + C_{u_1})/2$.

The radial velocities induced by the trailing ring vortices cancel out downstream at infinity. The velocities induced by two ring vortices equidistant from a plane perpendicular to the axis of the annulus is shown in Fig. 5A. These have equal circulations and hence by symmetry induce no radial component of velocity. At an infinite distance downstream the ring vortex system is composed of an infinite number of such pairs of vortex rings, and thus no radial velocities are induced. Each pair of vortices, however, induces an axial velocity which is just twice that induced by a single ring. At the plane of the blades the ring vortex system is made up of an infinite number of rings formed by only the downstream member of each pair, Fig. 5A. The axial velocity induced at the plane of the blades by the system of ring vortices in that case will be just half that induced at an infinite distance downstream. If C_{x_1} and C_{x_2} are the axial velocities at infinite distances upstream and downstream of the blades respectively, the axial velocity induced by the ring vortices downstream at infinity will be $C_{x_2} - C_{x_1}$ and that induced

in the plane of the blades is $(C_{x_2} - C_{x_1})/2$. The axial velocity at the blades is, therefore, $C_{x_1} + (C_{x_2} - C_{x_1})/2 = (C_{x_2} + C_{x_1})/2$.

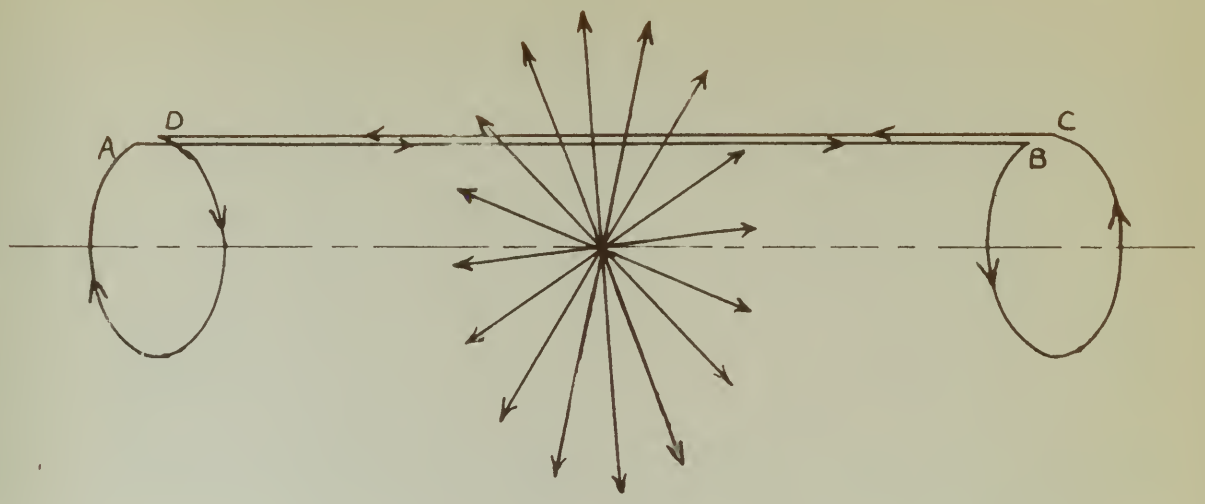


FIG 1A. VORTEX REPRESENTATION OF CASCADE DESIGNED TO GIVE FREE VORTEX FLOW.

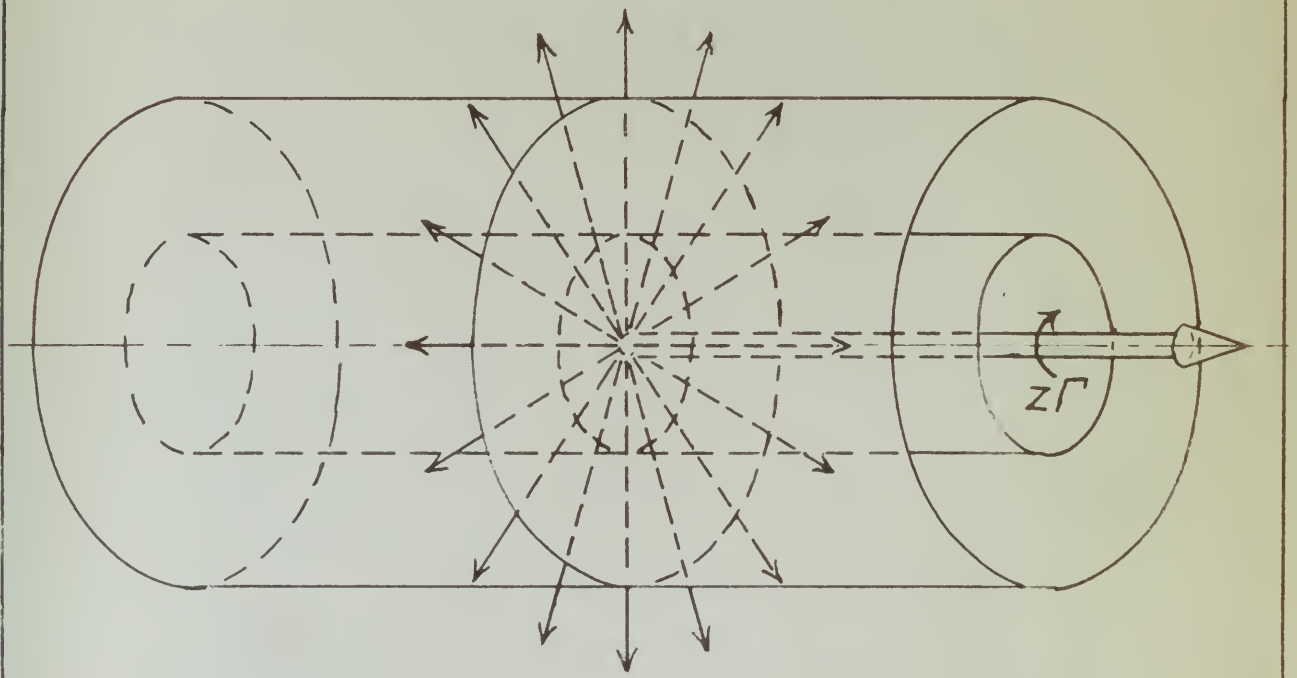


FIG 2A. VORTEX REPRESENTATION OF FREE VORTEX CASCADE IN AN ANNULUS.

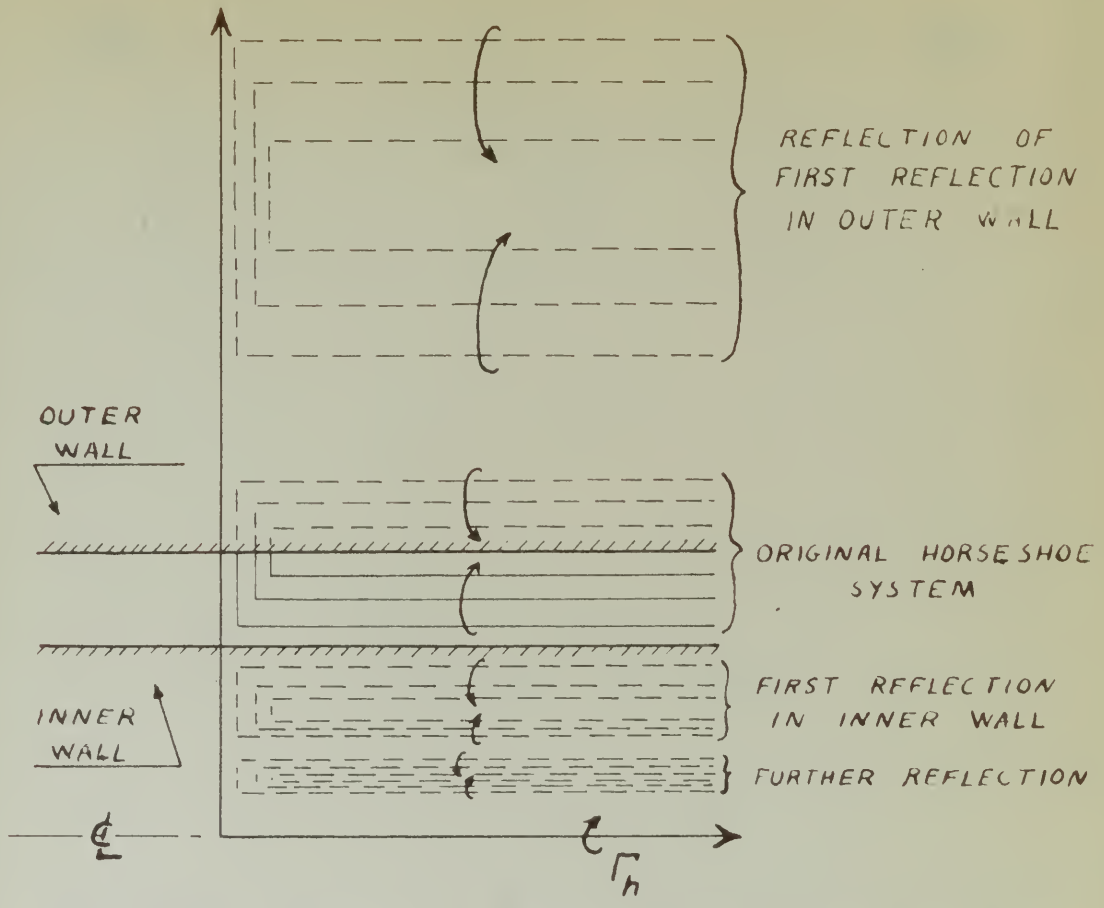


FIG. 3A. CASCADE BLADE WITH CIRCULATION INCREASING TOWARD TIP

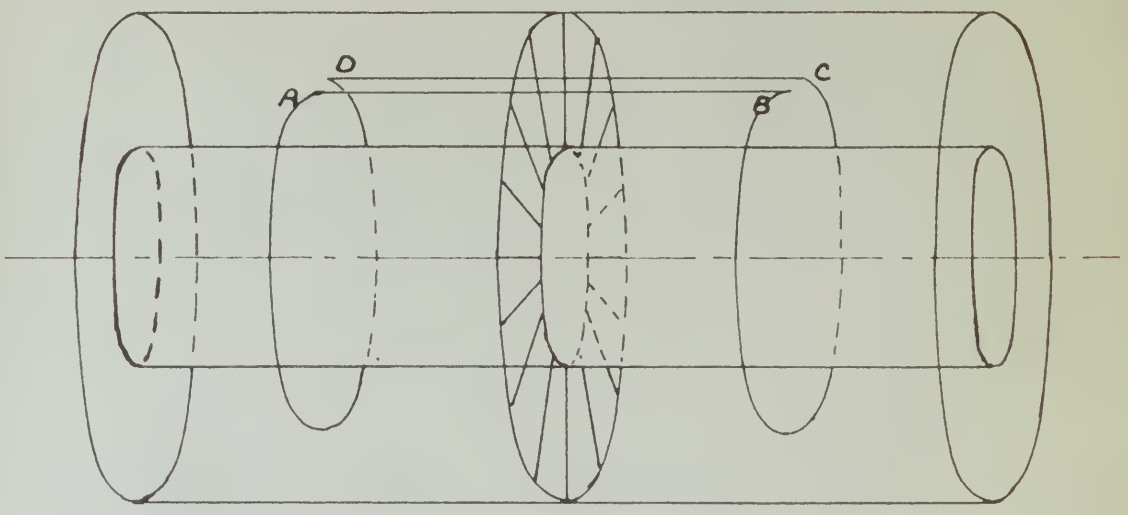


FIG. 4A. STREAM SURFACE IN AN ANNULUS WITH AN ANNULAR CASCADE

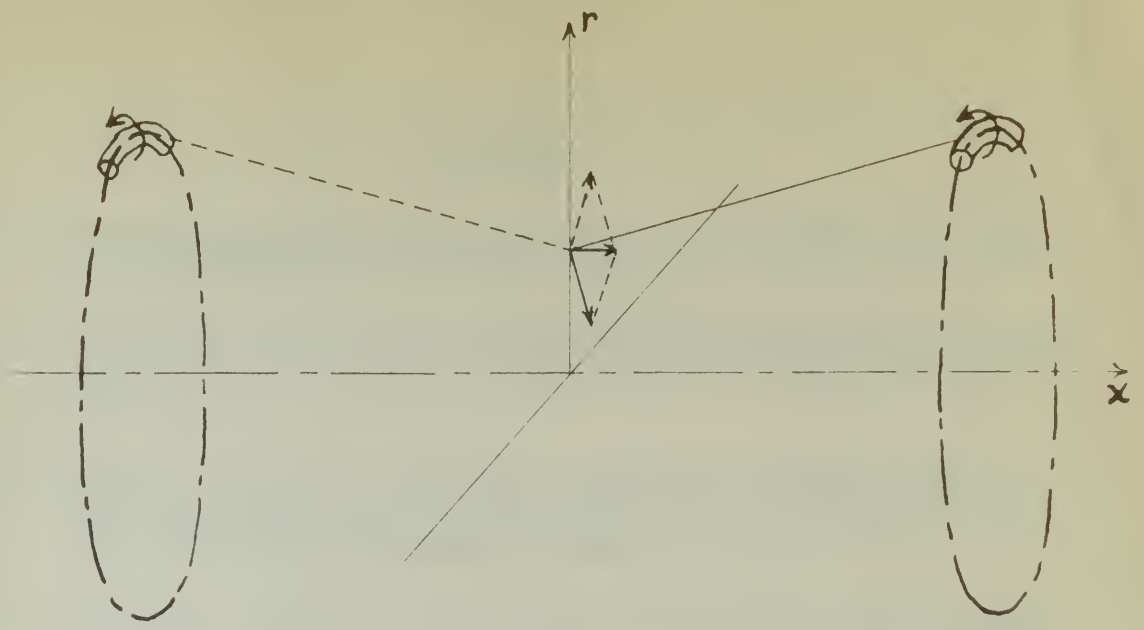


FIG. 5A. RING COMPONENTS OF TRAILING VORTICES

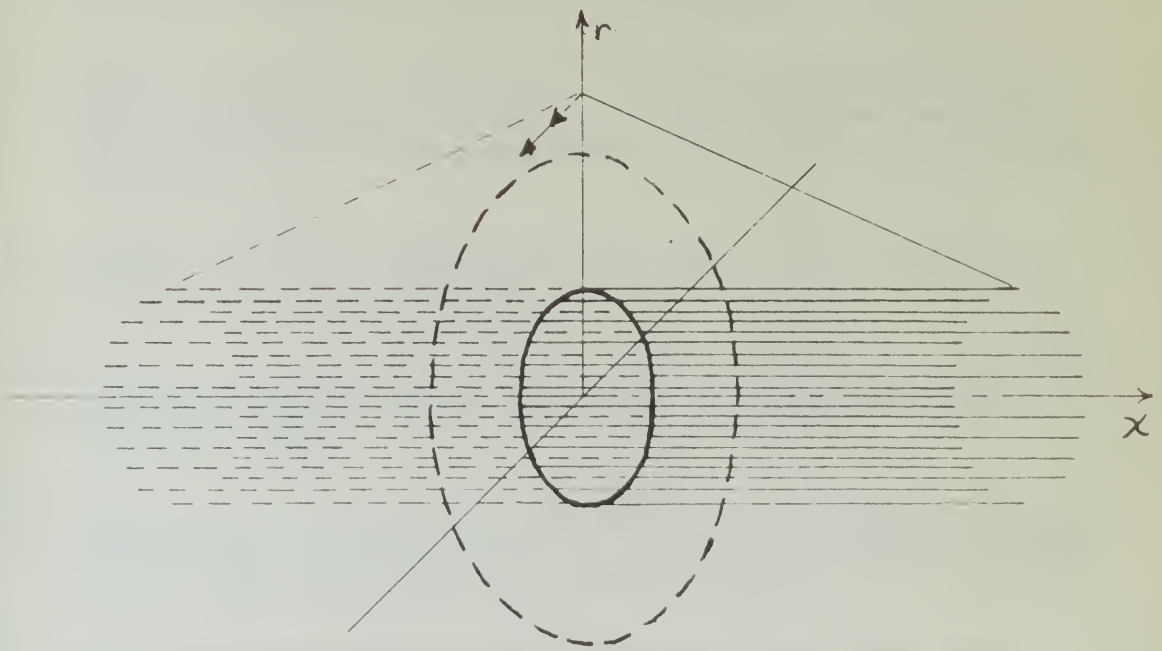


FIG 6A. AXIAL COMPONENTS OF TRAILING VORTICES

REFERENCES

1. Kantrowitz, Arthur, and Daum, Fred L.: Preliminary Experimental Investigation of Airfoils in Cascade. NACA CB, July 1942.

2. Bogdonoff, Seymour M., and Bogdonoff, Harriet E.: Blade Design Data for Axial Flow Fans and Compressors. NACA WR L-635, July 1945.

3. Zimney, Charles M., and Lappi, Viola M.: Data for Design of Entrance Vanes from Two-Dimensional Tests of Airfoils in Cascade. NACA WR-L5G18, October 1945.

4. Bogdonoff, Seymour M.: NACA Cascade Design Data for the Blade Design of High Performance Axial Flow Compressors. Journal of Aeronautical Sciences, February 1948.

5. Rouse, Hunter: Elementary Mechanics of Fluids. John Wiley and Sons, New York, 1946.

6. Eckert, B., and Pfluger, F.: The Resistance Coefficient of Round Wire Grids. NACA TM-1003 (Translation).

7. Jacobs, Eastman N., Ward, Kenneth E., and Pinkerton, Robert M.: The Characteristics of 78 Related Airfoil Sections from Tests in the Variable-Density Wind Tunnel. NACA Rept. No. 460, November 1933.

8. Diehl, Walter S.: Engineering Aerodynamics (Revised Edition), Ronald Press, New York, 1941.

9. Howell, A.R.: Cascade Theory and Performance (Part I); Compressor Theory and Performance (Part II). RAE Rept. Nos. E3946, and E3961, 1942.

10. Carter, A. D. S., and Cohen, Elizabeth M.: Preliminary Investigation into the Three Dimensional Flow thrcugh a Cascade of Airfoils. Power Jets Rept. R1180, February 1946.

11. Ruden, P.: Investigation of Single Stage Axial Fans. NACA TM-1062, 1944.

1. Zandbergen, Arthur, and Jacobs, Fred L.: Preliminary Experimental Investigation of Airfoils in Cascade. NACA CB, July 1942.

2. Naylor, Seymour M., and Naylor, Muriel F.: Plate Design Data for Axial Flow Fans and Compressors. NACA ACR L-425, July 1945.

3. Stanitz, John D., and Ellis, Viola M.: Tabs for Design of Turbine Vanes from Two-Dimensional Tests of Airfoils in Cascade. NACA WR-L-311, October 1945.

4. Naylor, Seymour M.: NACA Cascade Design Data for the Blade Design of High Performance Axial Flow Compressors. Journal of Aeronautical Sciences, February 1946.

5. Moore, Walter: Elementary Treatment of Fluids. John Wiley and Sons, New York, 1944.

6. Ackeret, J., and Pfenninger, W.: The Maximum Deflection of Round Wire Grids. NACA TM-1003 (Translation).

7. Jacobs, Eastman N., Ward, Kenneth E., and Pinkerton, Robert M.: The Characteristics of 78 Related Airfoil Sections from Tests in the Variable-Density Wind Tunnel. NACA Rept. No. 460, Langley 1933.

8. Diehl, Walter S.: Engineering Aerodynamics (Revised Edition), Ronald Press, New York, 1941.

9. Durand, W.F.: Aerodynamic Theory and Performance (Part I), Computation Theory and Performance (Part II). Cal Tech. NACA, 1934, and 1936, 1943.

10. Garrick, I. E., and Rubert, Elizabeth M.: Preliminary Investigation into the Three Dimensional Flow through a Cascade of Airfoils. Johns Hopkins, NACA, February 1946.

11. Ruden, P.: Investigation of Single Plane Grid Flow. NACA TM-1000, 1941.

12. Hawthorne, W. R.: MIT Lecture Notes, Gas Turbines, Subject 2.213 (1948-49).

13. Sproule, Robert S.: Design of a Cascade Test Rig. S.M. Thesis, M.I.T. Department of Mechanical Engineering, 1947.

14. Merchant, W., and Hansford, J. T.: Flow of an Ideal Fluid Past a Cascade of Blades. Metropolitan-Vickers Ltd. Summary Report, June 1945.

15. Carter, A. D. S.: Three-Dimensional Flow Theories for Axial Compressors and Turbines. The Institution of Mechanical Engineers, Proceedings 1948, Vol. 159.

12. Bowlenberg, E. A.: Dry Friction Effects, Gas Turbines, October 7.212 (1960-XV).

13. Woodcock, Gordon C.A. Design of a Cascade Test Rig: M.Sc. Thesis, M.I.T. Department of Mechanical Engineering, 1947.

14. Thwaites, G., van Haarlem, A., Ta. Flow of an Ideal Fluid Past a Cascade of Blades. Aeronautical Quarterly, Aug. 1954.

15. Barton, E. A. c.: Three-Dimensional Flow Through Jet Rotor Impellers. The Institution of Mechanical Engineers, Proceedings 1949, Vol. 160.

TABLE I

Ordinates of Mean Camber Line -

Blade Sections - Cascade B

	R			
	1.0	.9	.7	.5
	27.°	22.4°	13.2°	4.°
c in.	2.000	1.875	1.625	1.375
Sta. % c.	Ordinates of Mean Camber Line			
0	0	0	0	0
1.25	1.38	1.01	.81	.55
2.50	2.59	1.90	1.53	1.04
5.00	4.56	3.36	2.69	1.82
7.50	6.02	4.43	3.55	2.40
10.	7.16	5.27	4.24	2.86
15.	8.82	6.50	3.84	3.53
20.	9.98	7.34	5.90	3.98
25.	10.90	8.02	6.45	4.36
30.	11.55	8.50	6.77	4.62
35.	11.95	8.80	7.06	4.79
40.	12.10	8.90	7.15	4.84
45.	12.06	8.87	7.12	4.82
50.	11.88	8.72	7.01	4.75
55.	11.42	8.41	6.75	4.57
60.	10.75	7.90	6.35	4.30
65.	9.83	7.24	5.81	3.94
70.	8.71	6.45	5.14	3.48
75.	7.57	5.57	4.48	3.03
80.	6.37	4.68	3.76	2.54
85.	5.01	3.69	2.96	2.01
90.	3.49	2.57	2.06	1.40
95.	1.80	1.32	1.06	.72
100.	0	0	0	0

All ordinates measured from chord line in percent of chord.

TABLE II


Ordinates of Blade Sections -

Cascade B

R

Sta.	1.0		.9		.7		.5	
% c.	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower
0	.037	.000	.025	.000	.019	.000	.017	-.000
1.25	.079	-.004	.051	-.006	.044	-.008	.032	-.010
2.50	.111	+.010	.074	+.002	.064	-.007	.047	-.011
5.00	.156	.032	.112	.016	.094	-.003	.066	-.010
10.	.224	.069	.165	.036	.132	+.006	.091	-.009
20.	.295	.111	.222	.058	.173	.022	.119	-.006
30.	.333	.135	.251	.070	.193	.032	.132	-.004
40.	.343	.145	.260	.078	.198	.038	.134	-.001
50.	.328	.144	.249	.081	.188	.041	.128	+.001
60.	.292	.136	.221	.078	.166	.040	.112	.003
70.	.237	.117	.180	.068	.136	.037	.092	.004
80.	.168	.086	.129	.049	.098	.026	.066	.002
90.	.090	.043	.070	.024	.054	.011	.039	-.002
95.	.049	.019	.040	.008	.032	.002	.024	-.005
100.	.008	-.009	.008	-.009	.008	-.009	.008	-.008
LER.	.022		.021		.018		.016	
TER.	.015		.015		.015		.015	


All ordinates measured in inches from chord line.

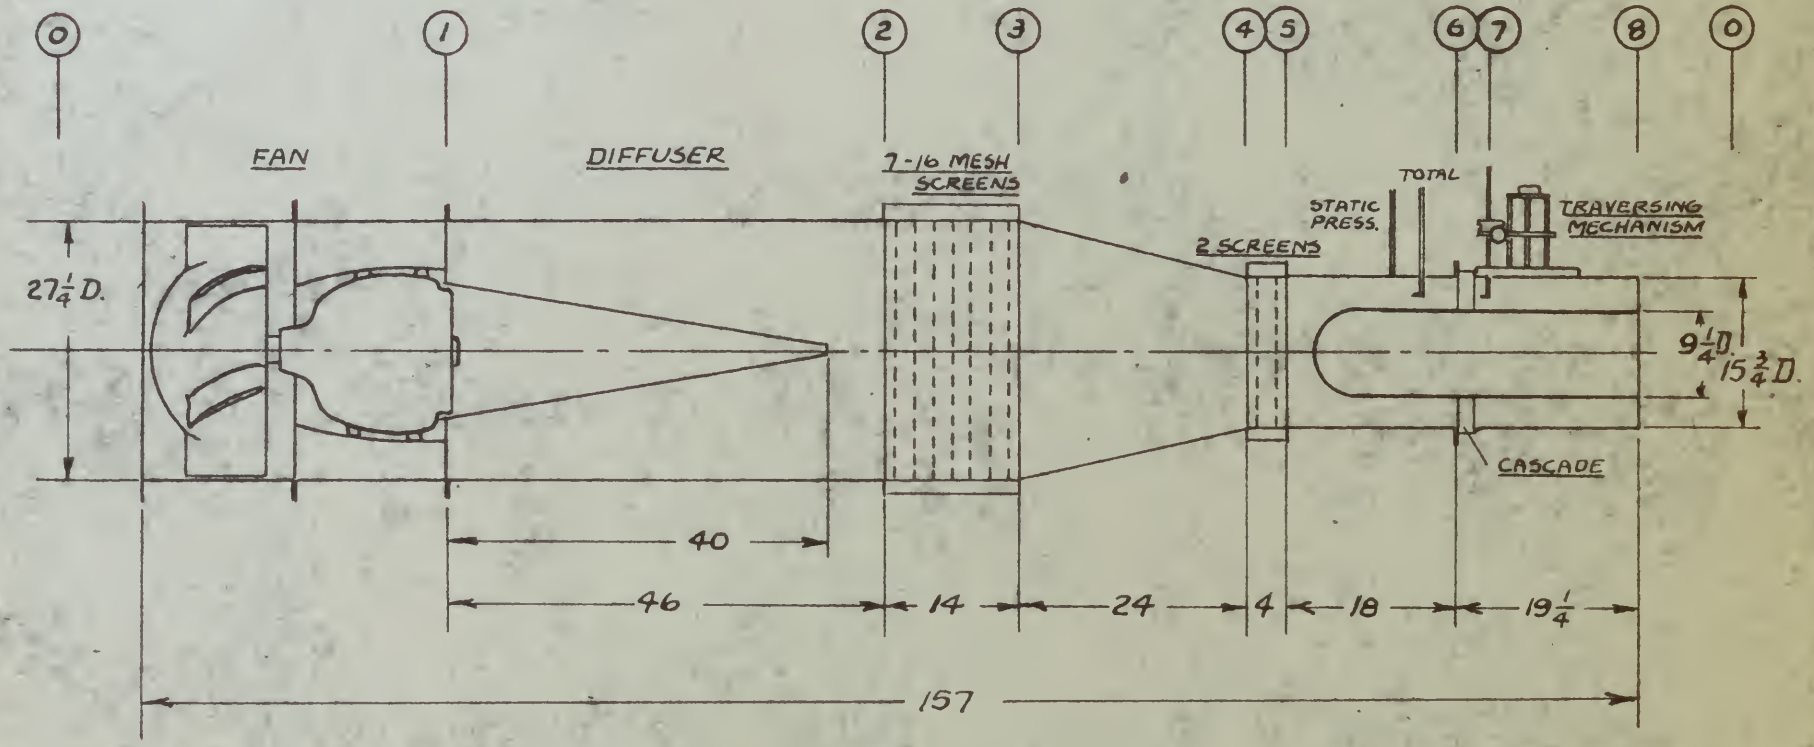

MIT LOW SPEED ANNULAR CASCADE TUNNEL

GENERAL ARRANGEMENT AND DIMENSIONS

4-25-49

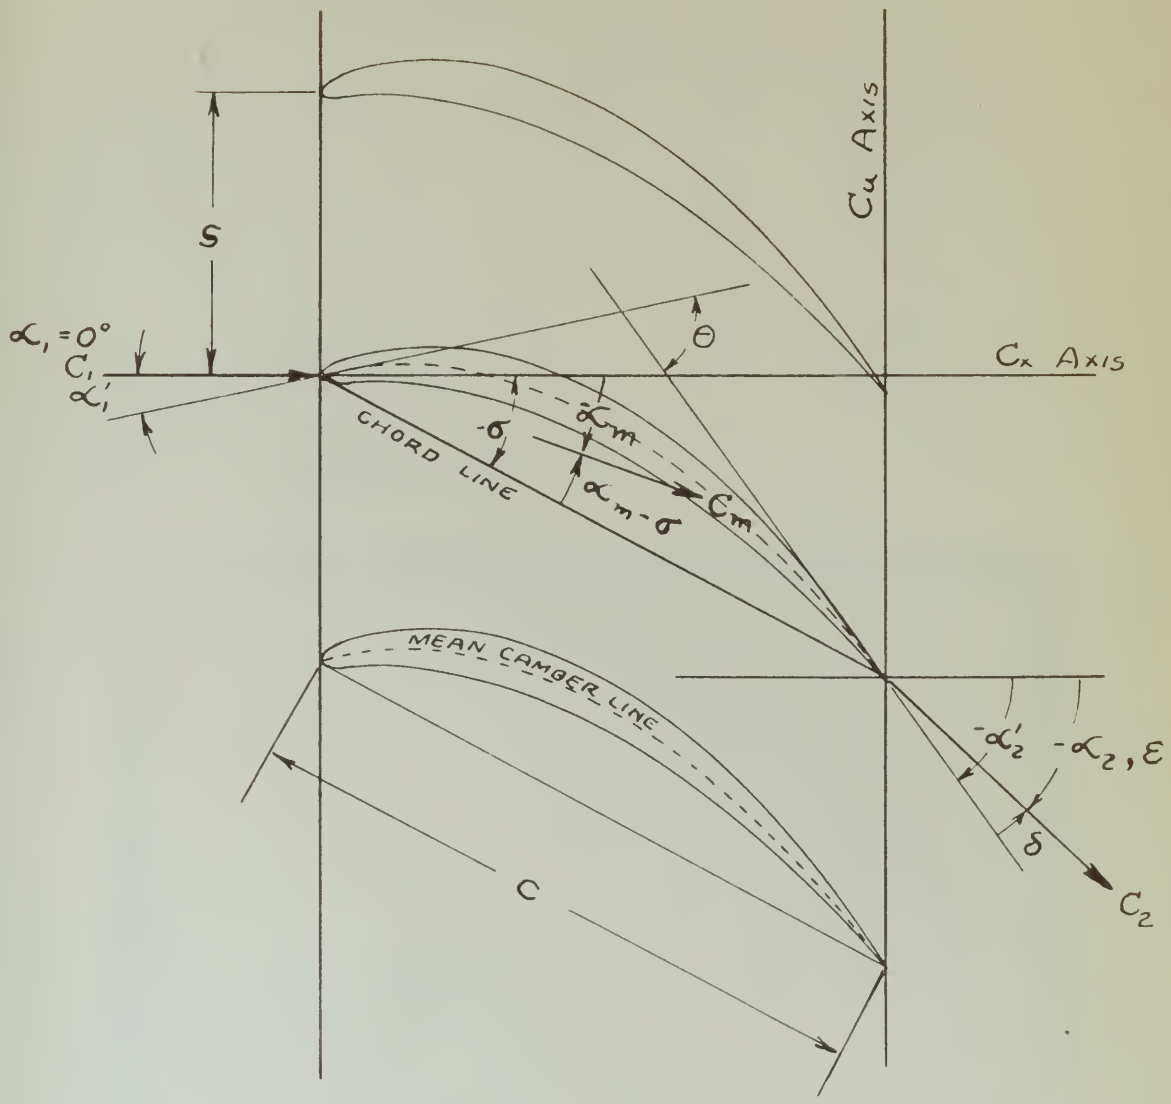



CASCADE NOMENCLATURE

INLET GUIDE VANE

5 5 49

CASCADE A

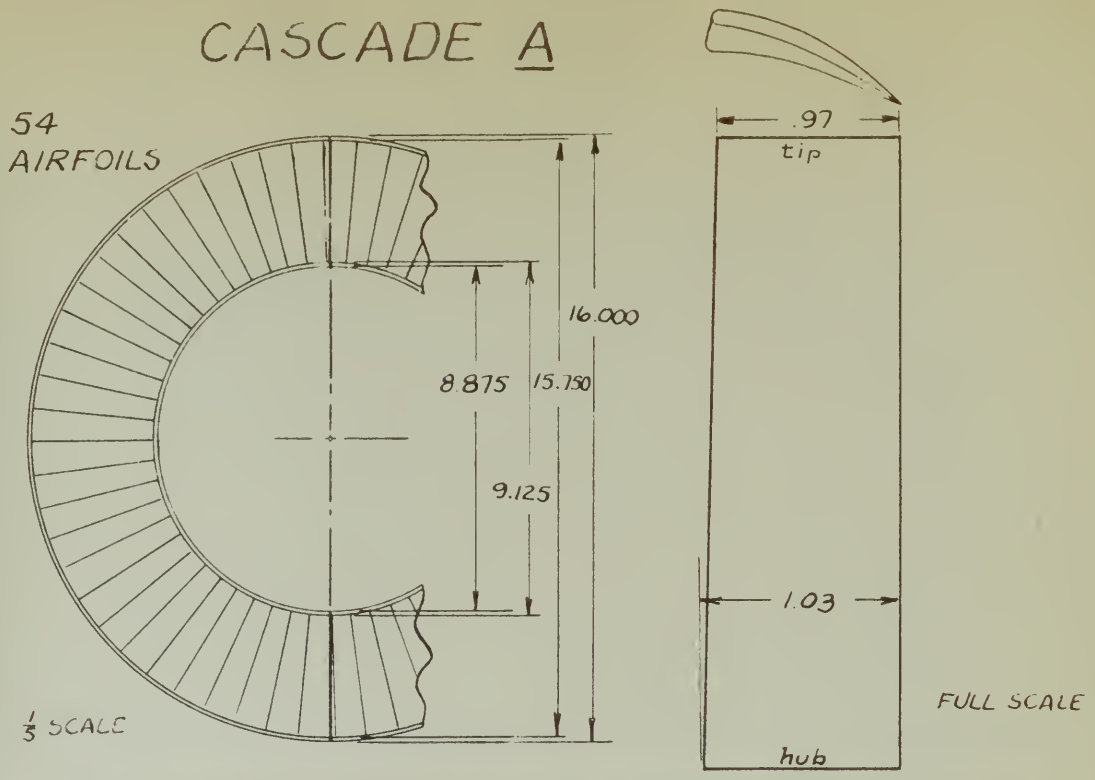
54
AIRFOILS
16.000
15.150
8.875
9.125
1/3 SCALE
.97
tip
1.03
hub
FULL SCALE

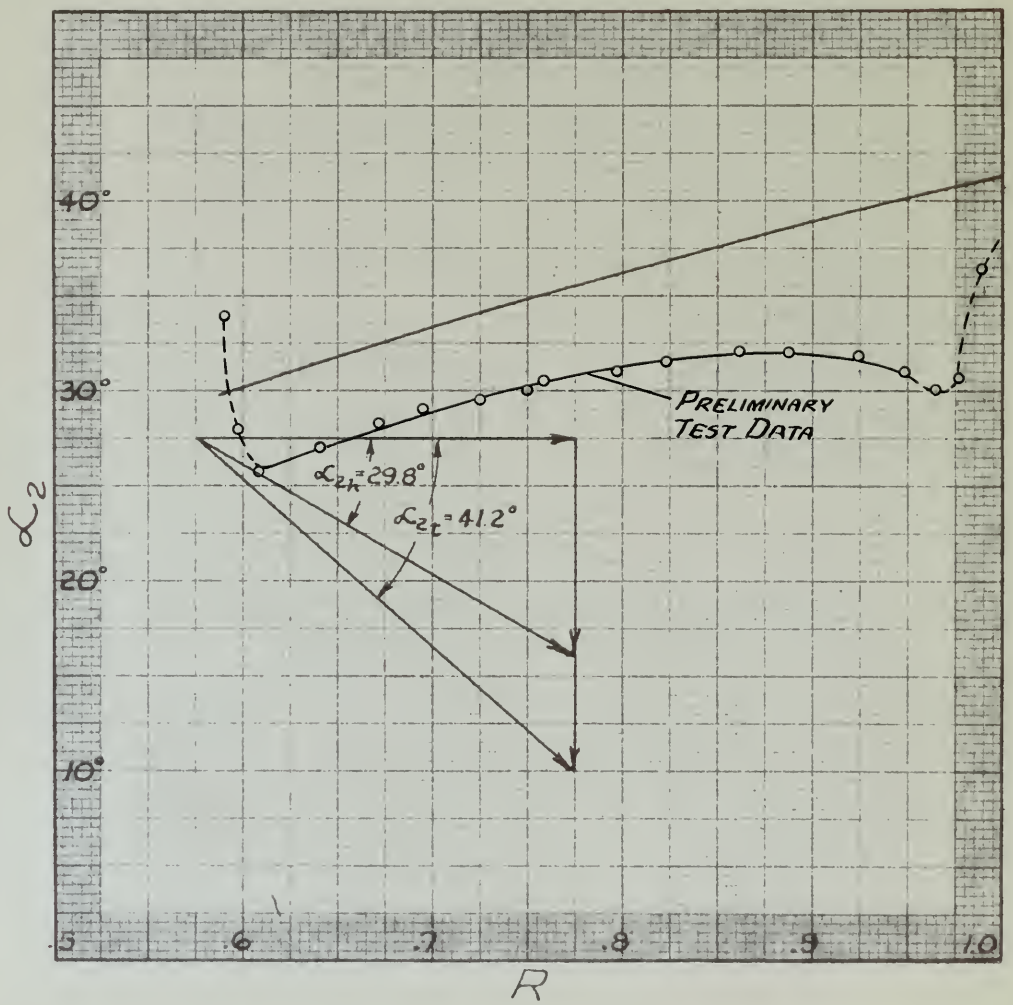
40°
30°
20°
10°
α_2
PRELIMINARY
TEST DATA
α_{2h}=29.8°
α_{2t}=41.2°
.5
.6
.7
.8
.9
1.0
R

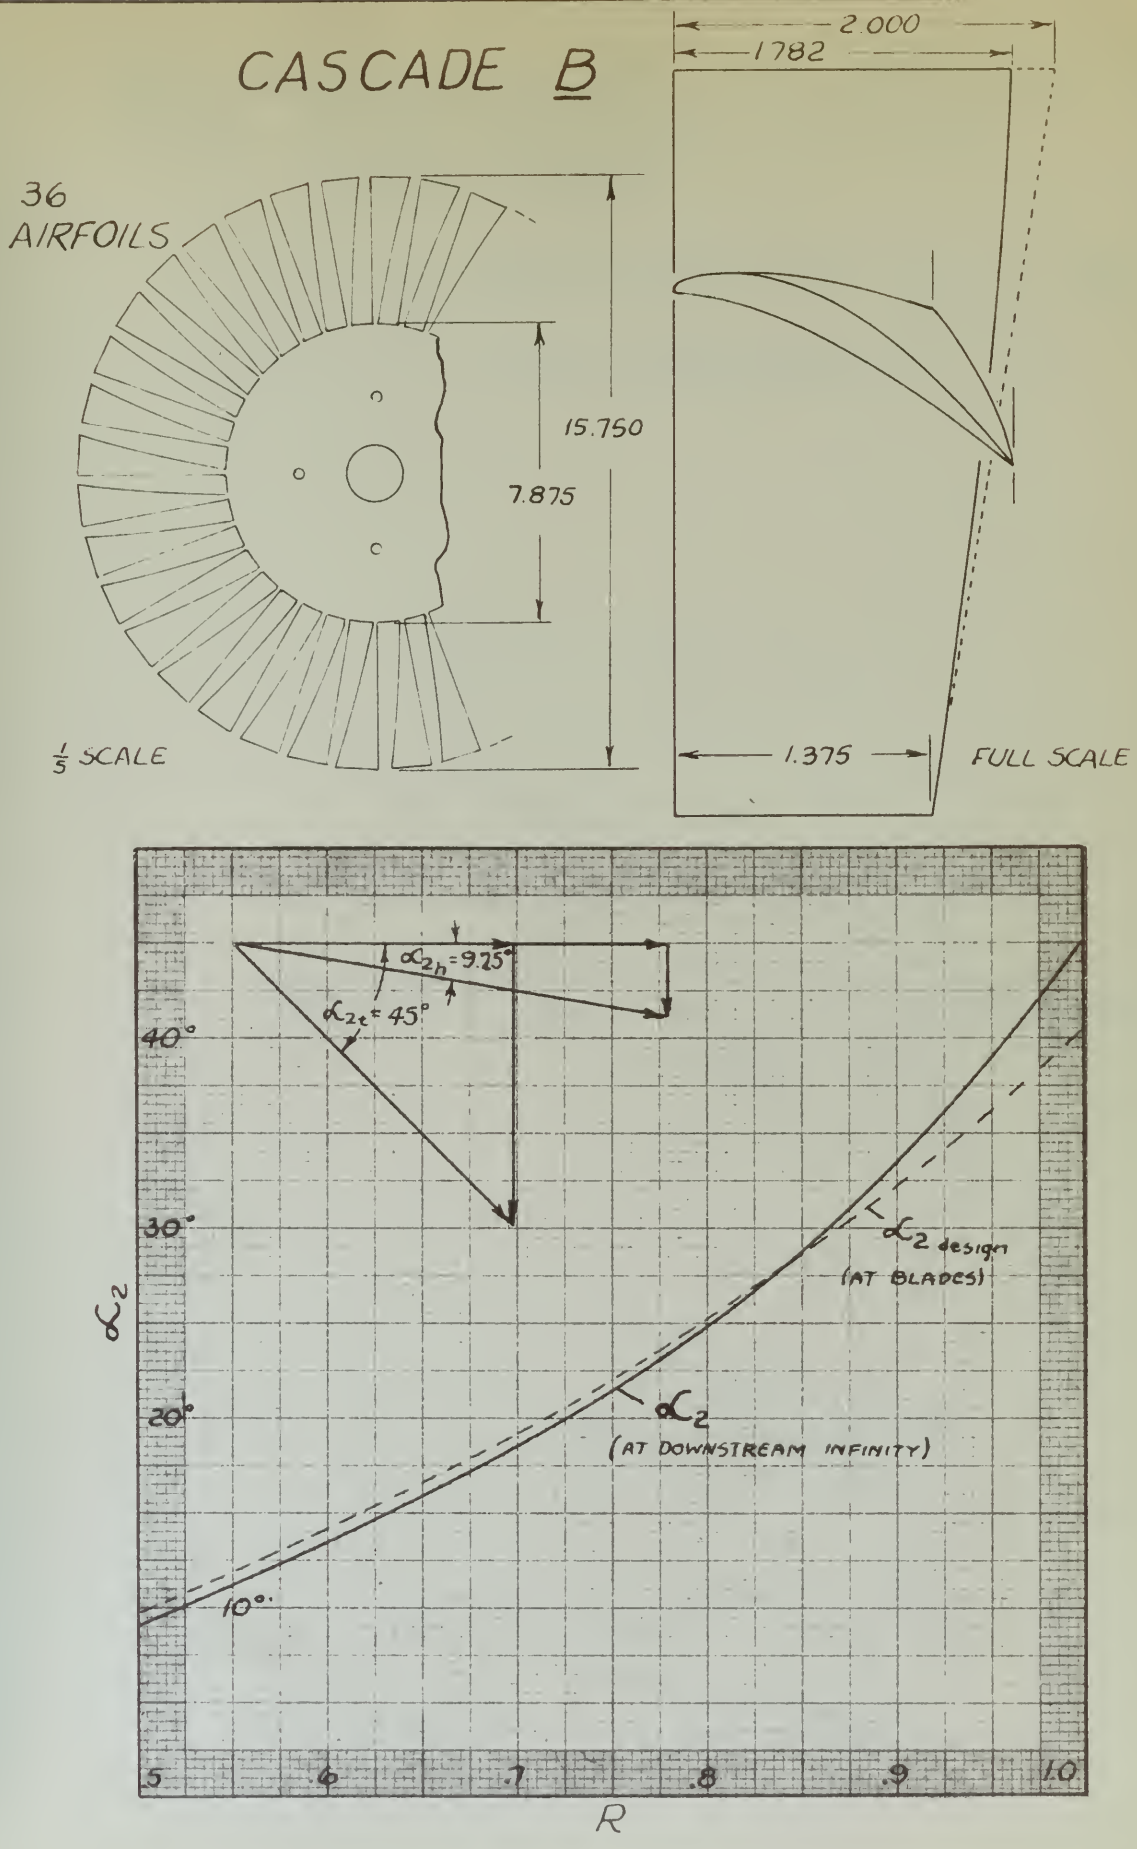

CASCADE B
36
AIRFOILS
15.750
7.875
1/5 SCALE
2.000
1.782
1.375
FULL SCALE
α_{2h} = 9.25°
α_{2t} = 45°
40°
30°
20°
10°
α_2
α_2 design
(AT BLADES)
α_2
(AT DOWNSTREAM INFINITY)
.5
.6
.7
.8
.9
1.0
R
G
5-1-49

Figure 4

DETERMINATION OF FAN PERFORMANCE IN MIT ANNULAR CASCADE WIND TUNNEL

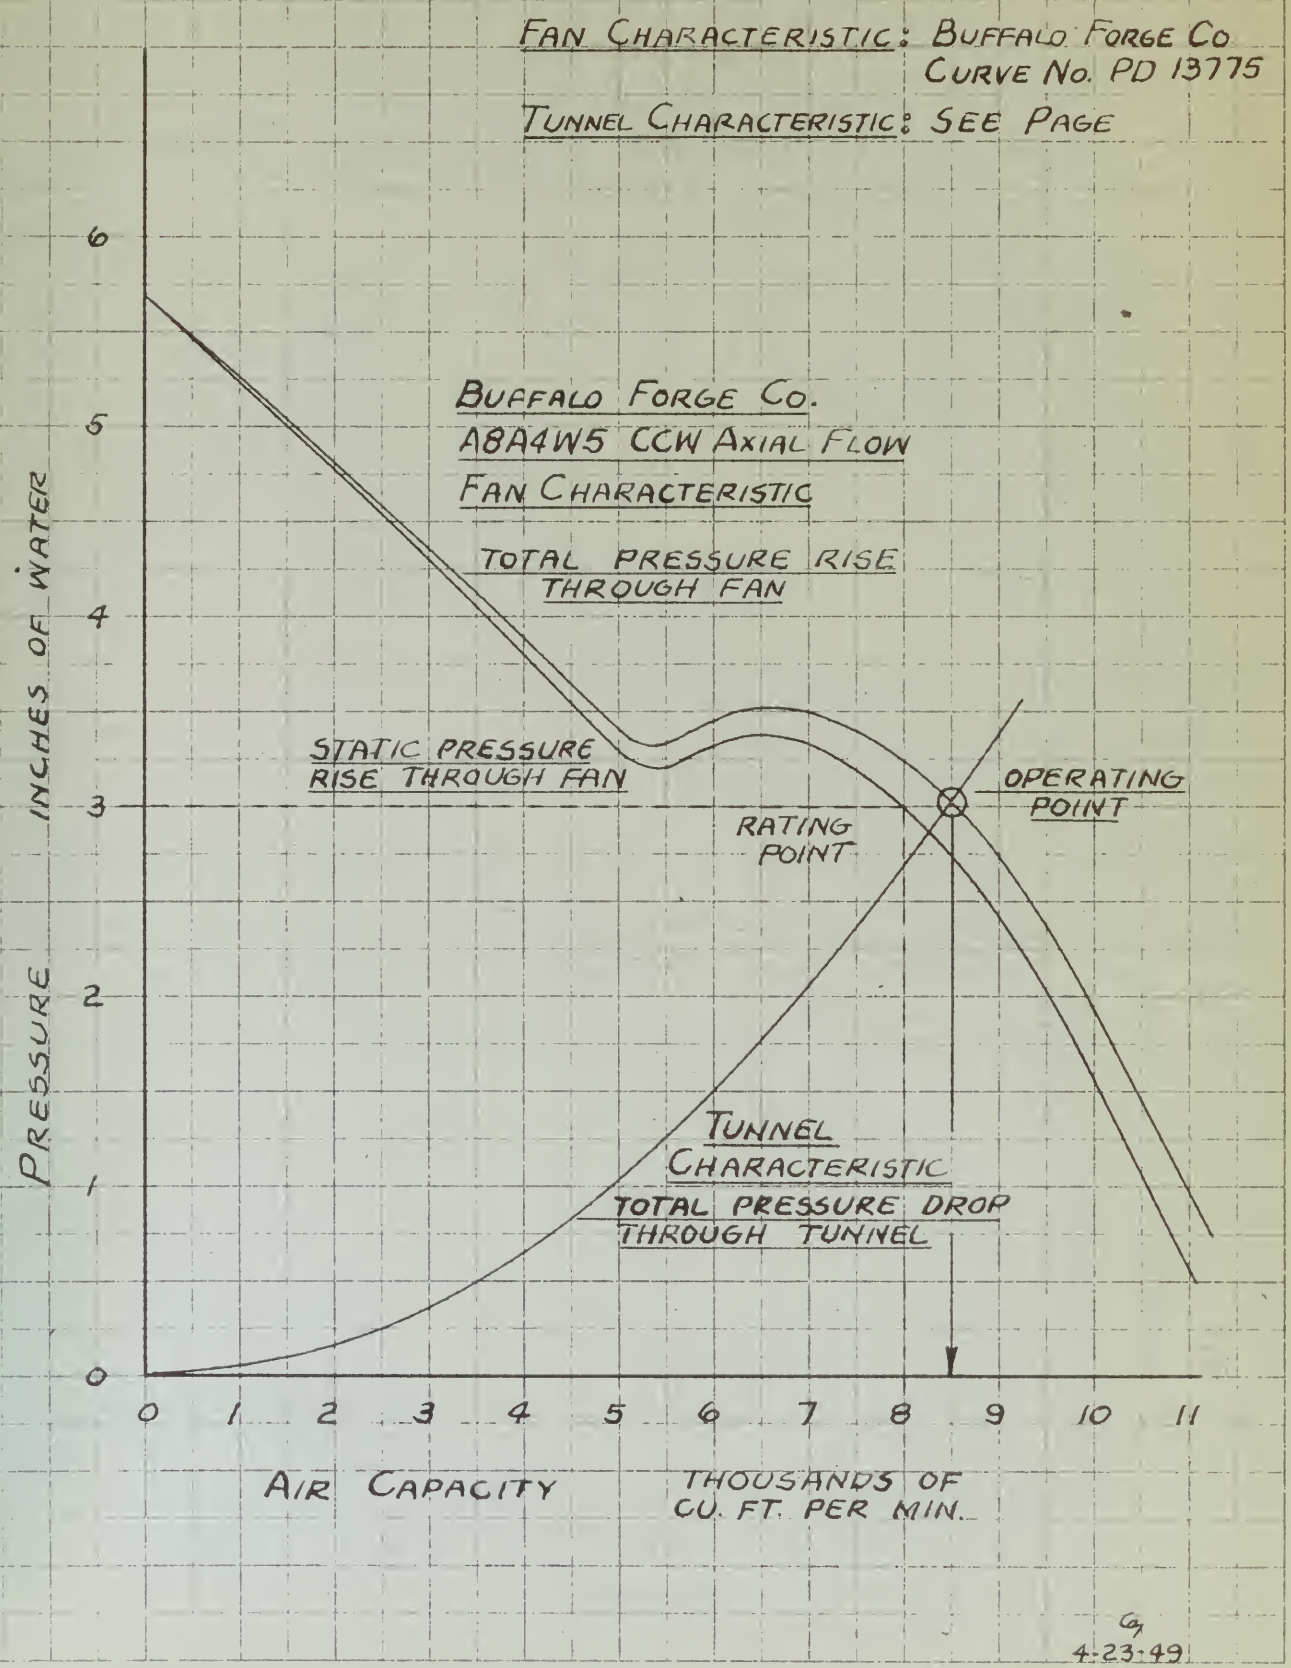


Figure 5

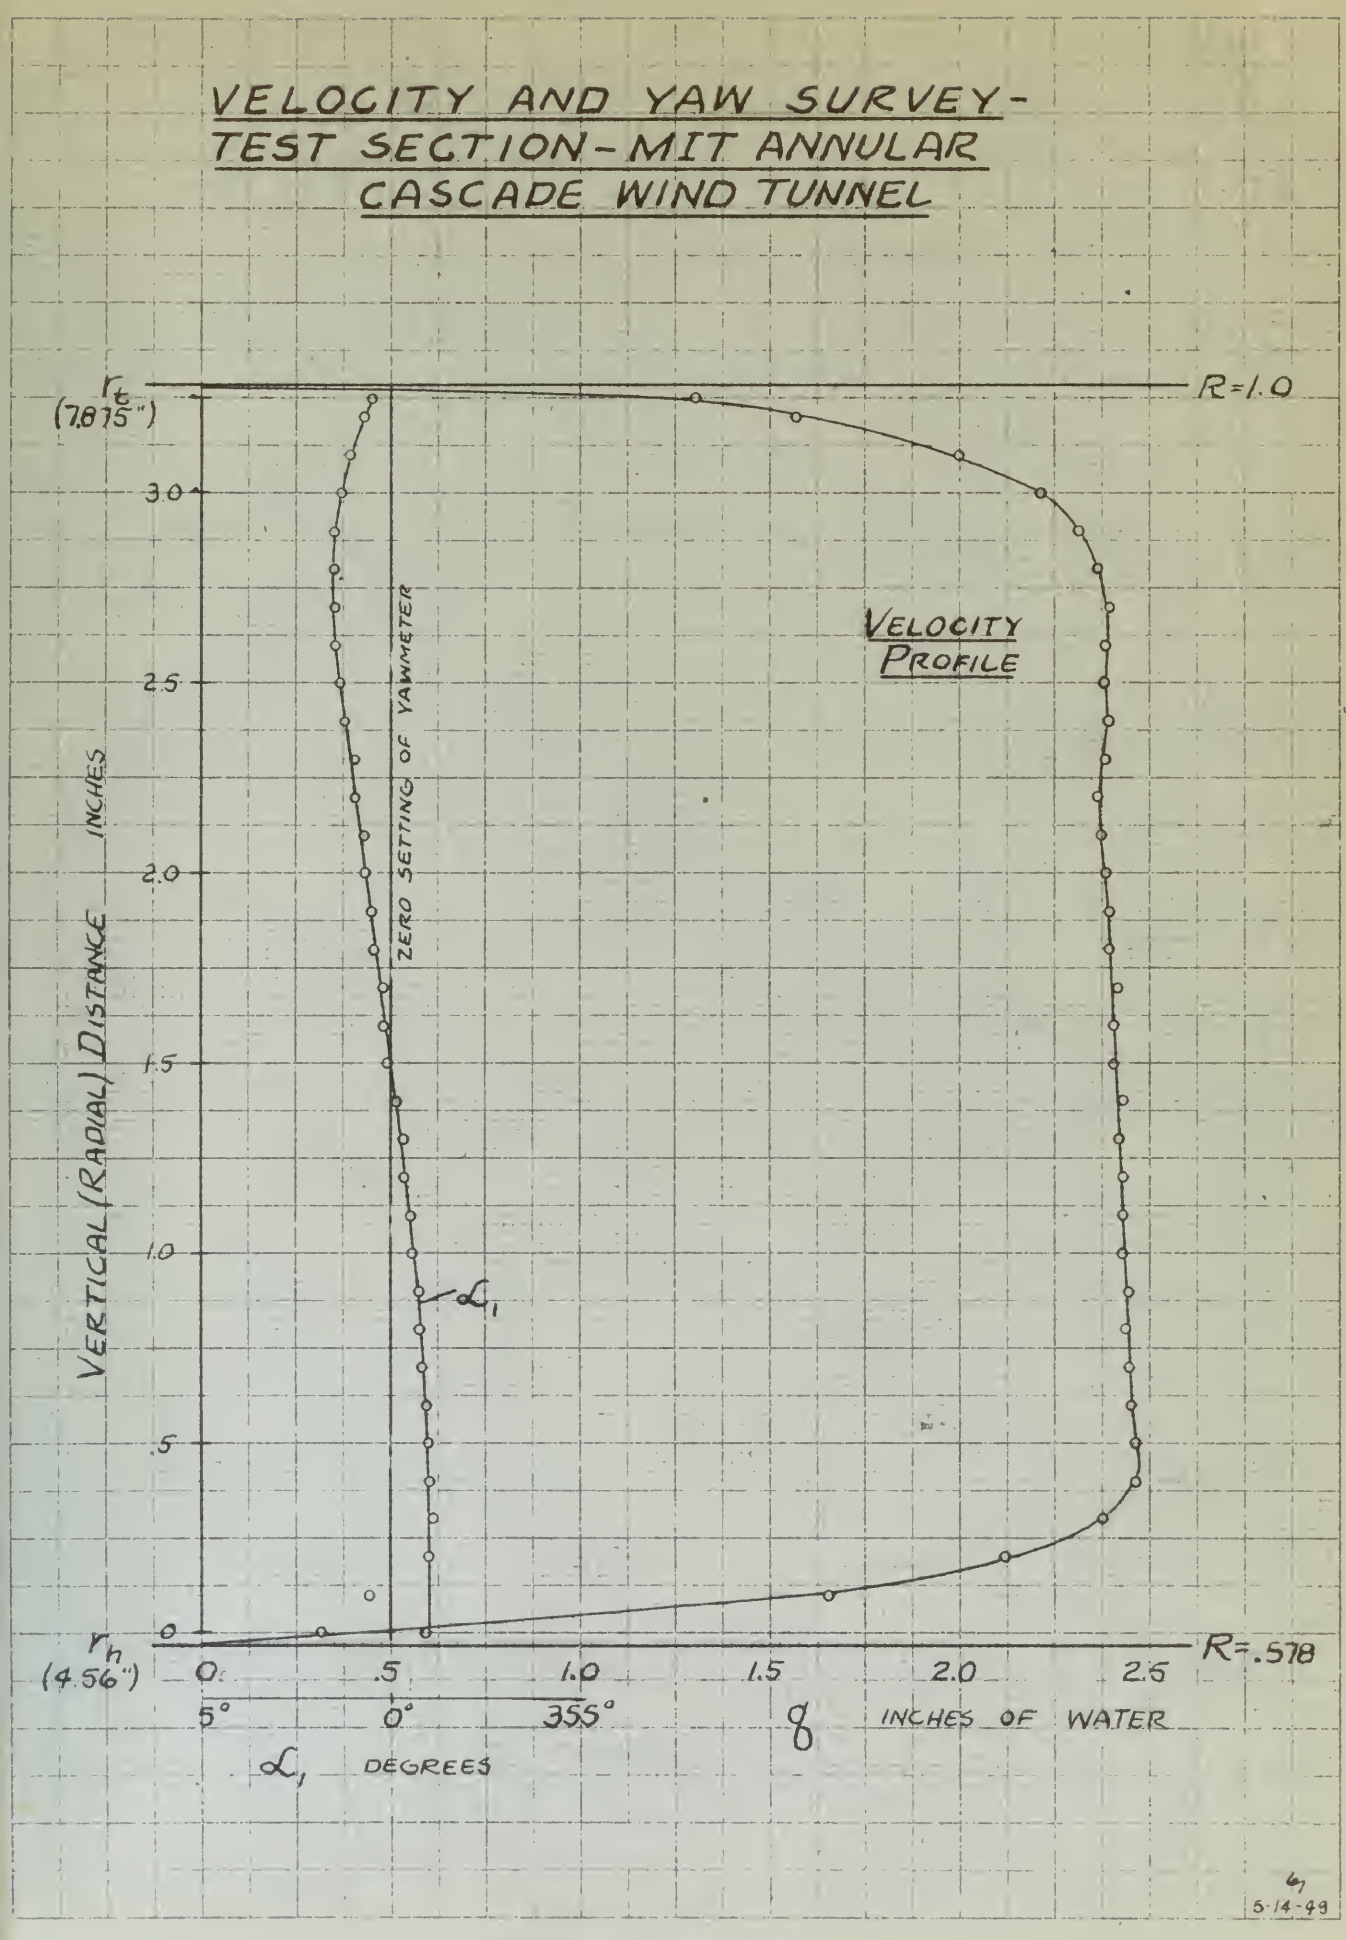

VELOCITY AND YAW SURVEY-
TEST SECTION-MIT ANNULAR
CASCADE WIND TUNNEL
r_t
(7.875")
R=1.0
3.0
2.5
2.0
1.5
1.0
.5
0
VERTICAL (RADIAL) DISTANCE INCHES
ZERO SETTING OF YAWMETER
VELOCITY
PROFILE
α_1
r_h
(4.56")
R=.578
0
.5
1.0
1.5
2.0
2.5
INCHES OF WATER
q
5°
0°
355°
α_1 DEGREES
4
5-14-49

Figure 6




AIR OUTFLOW ANGLES DETERMINED BY A TANGENTIAL TRAVERSE OF THE BLADE WAKES ~ CASCADE A
R = 1.0
R = .578
SURFACE
SURFACE
LOWER
UPPER
AIR-FOIL
AIR-FOIL
WAKE
VERTICAL (RADIAL) DISTANCE INCHES
θ DEGREES
14°
12°
10°
8°
6°
4°
2°
0°
3.0
2.5
2.0
1.5
1.0
.5
0
5-15-49

Figure 7



Annular Cascade Tunnel -- Overall View

Figure 8

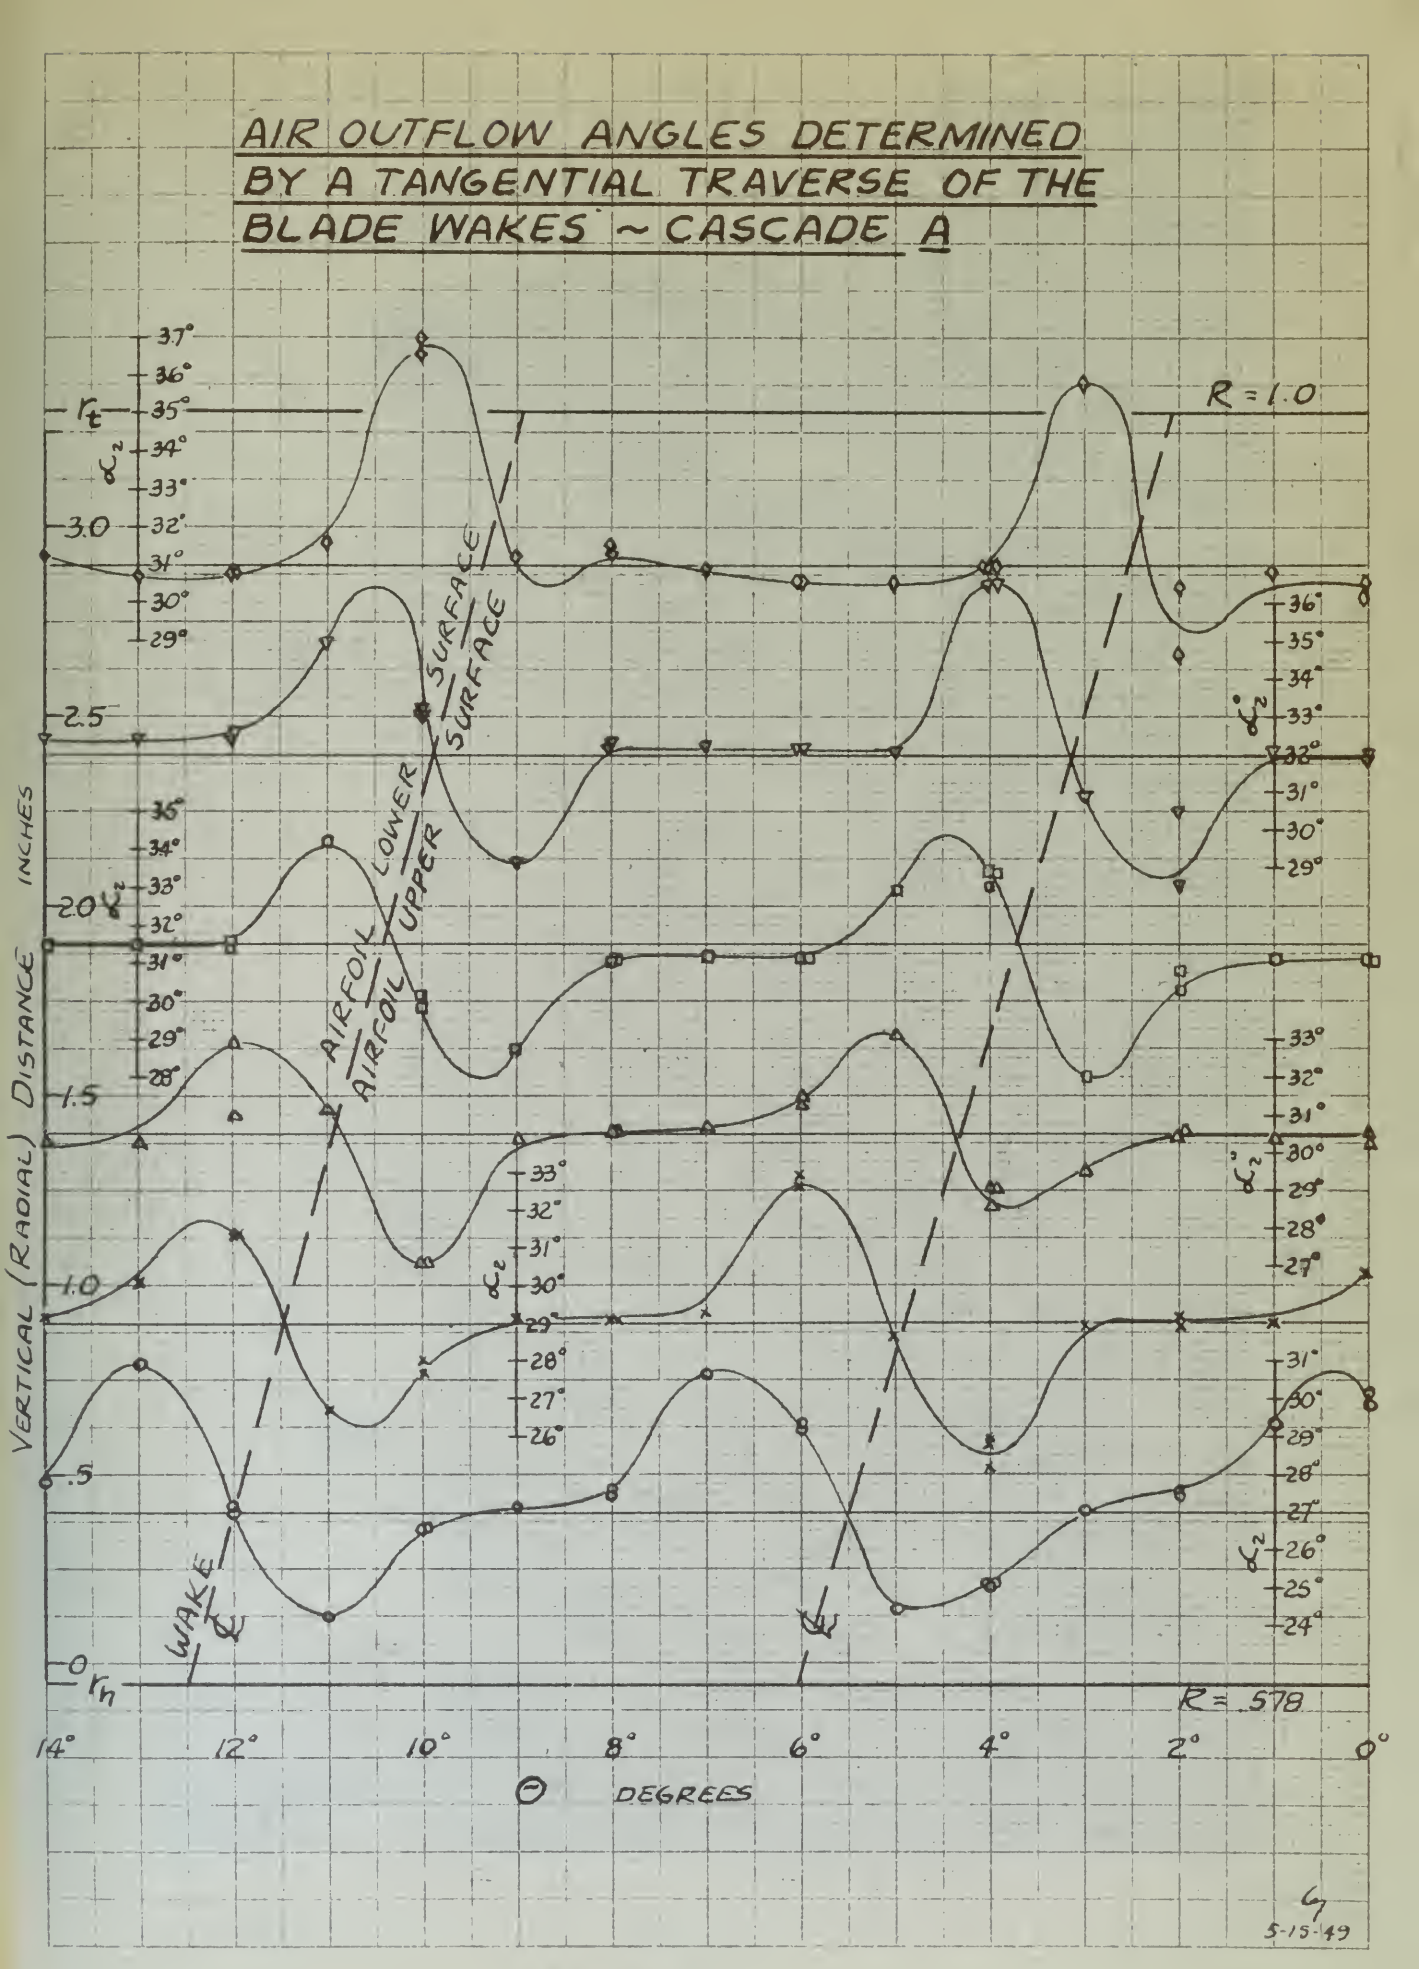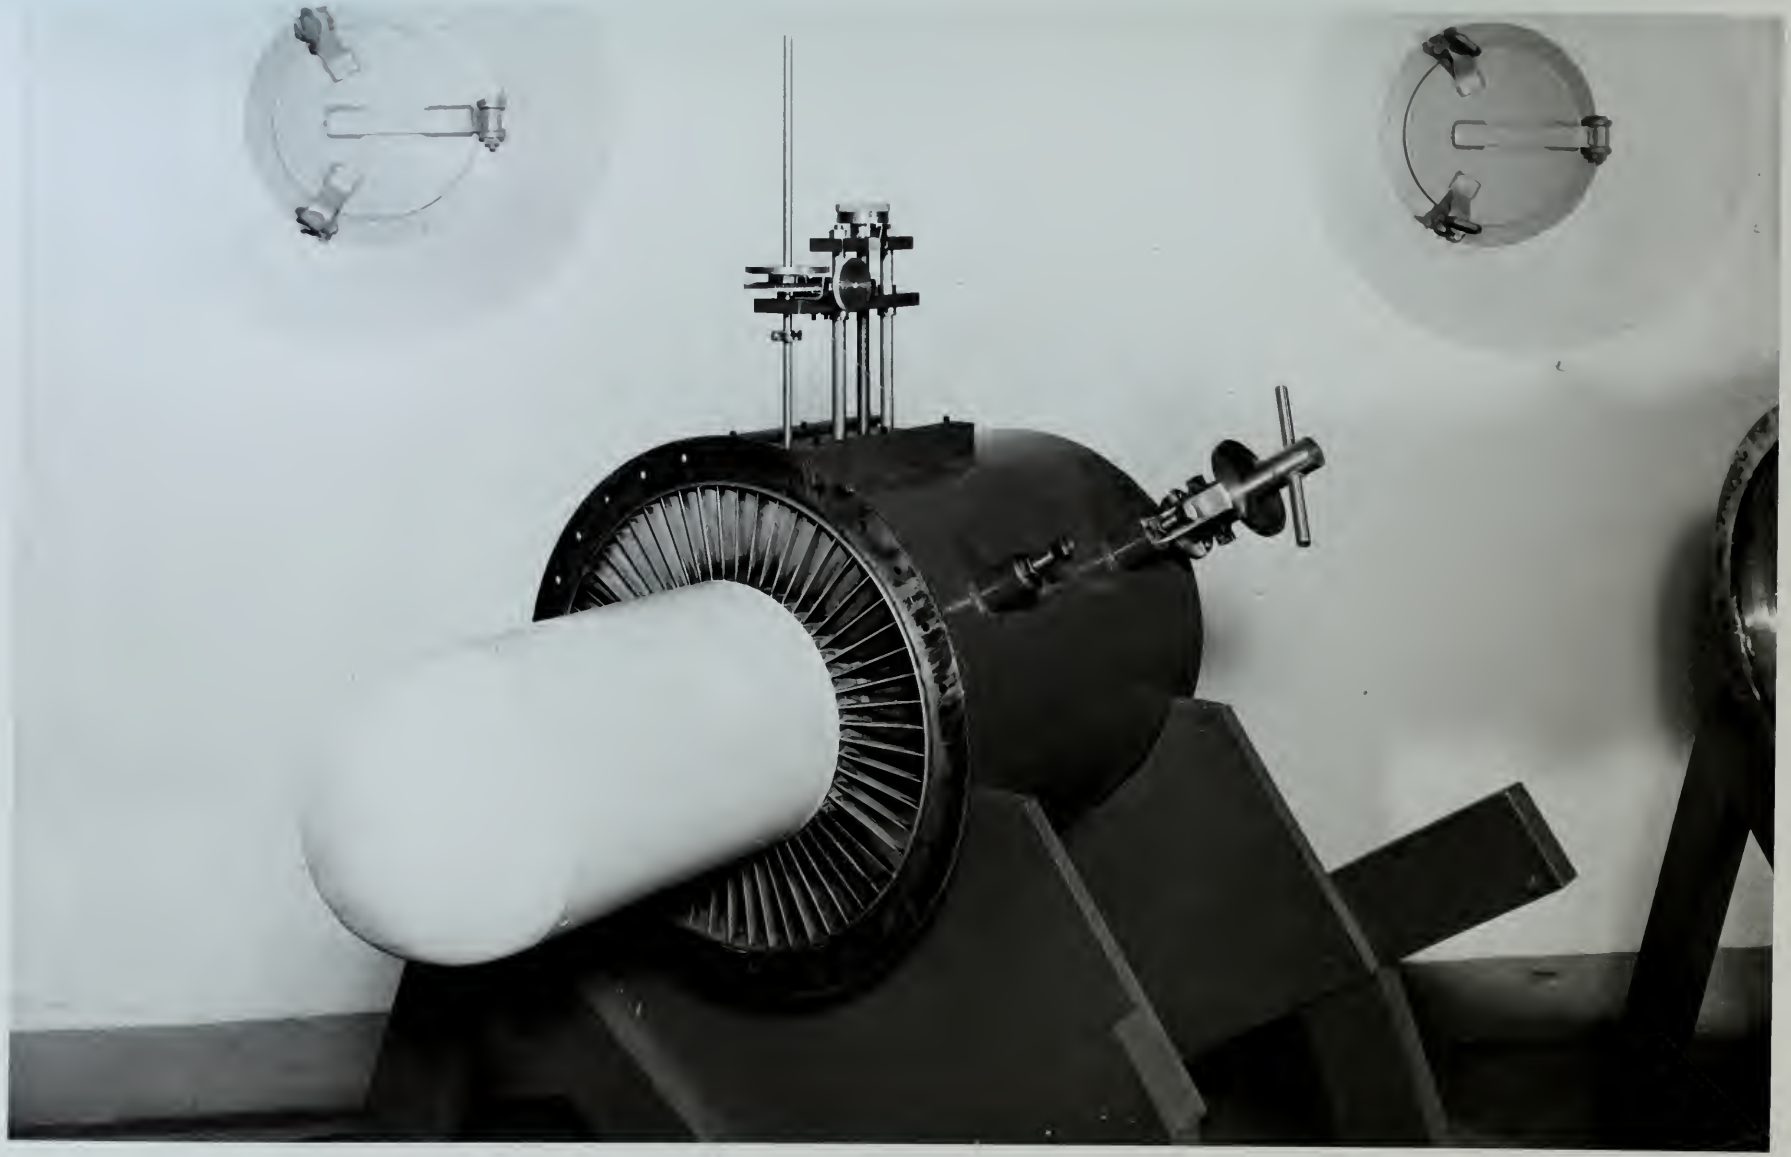

Annular Cascade Tunnel -- Test Section
Three Quarter Front View

Figure 9


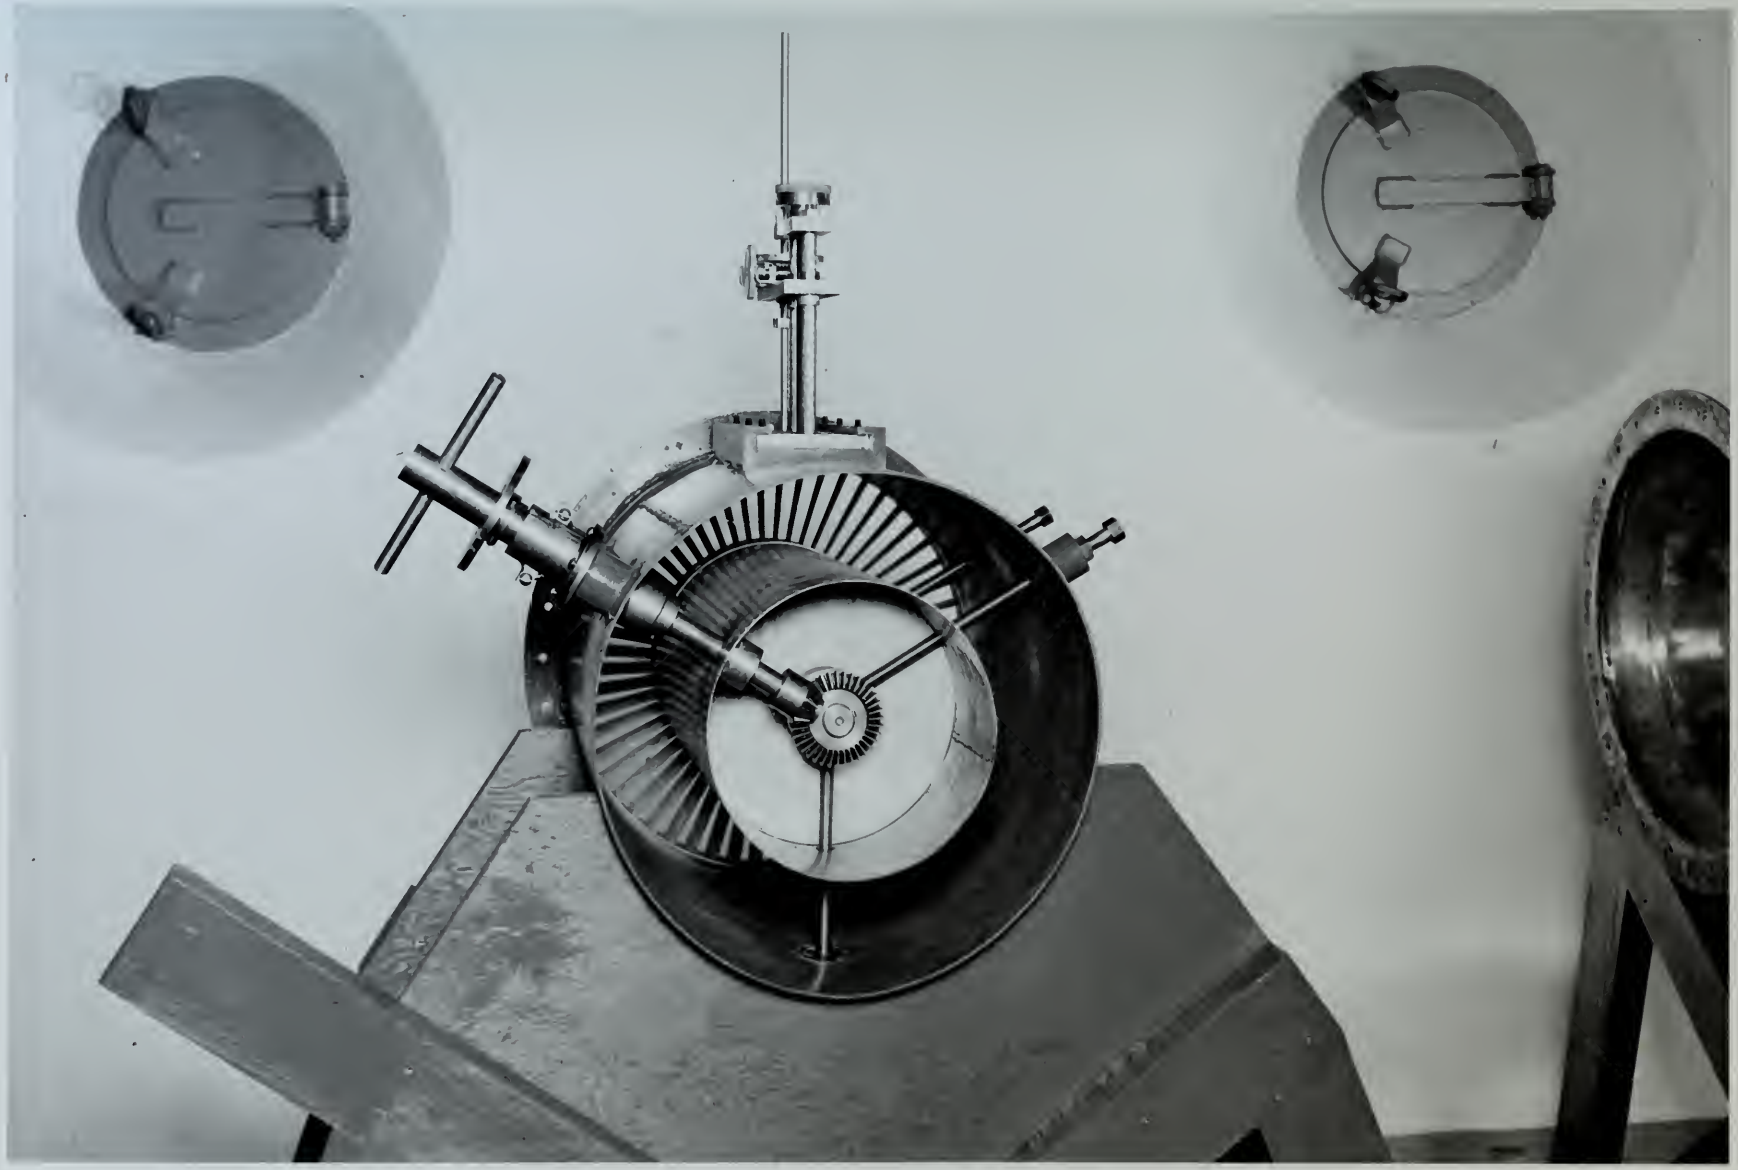



Figure 10

Annular Cascade Tunnel -- Test Section
Three Quarter Rear View

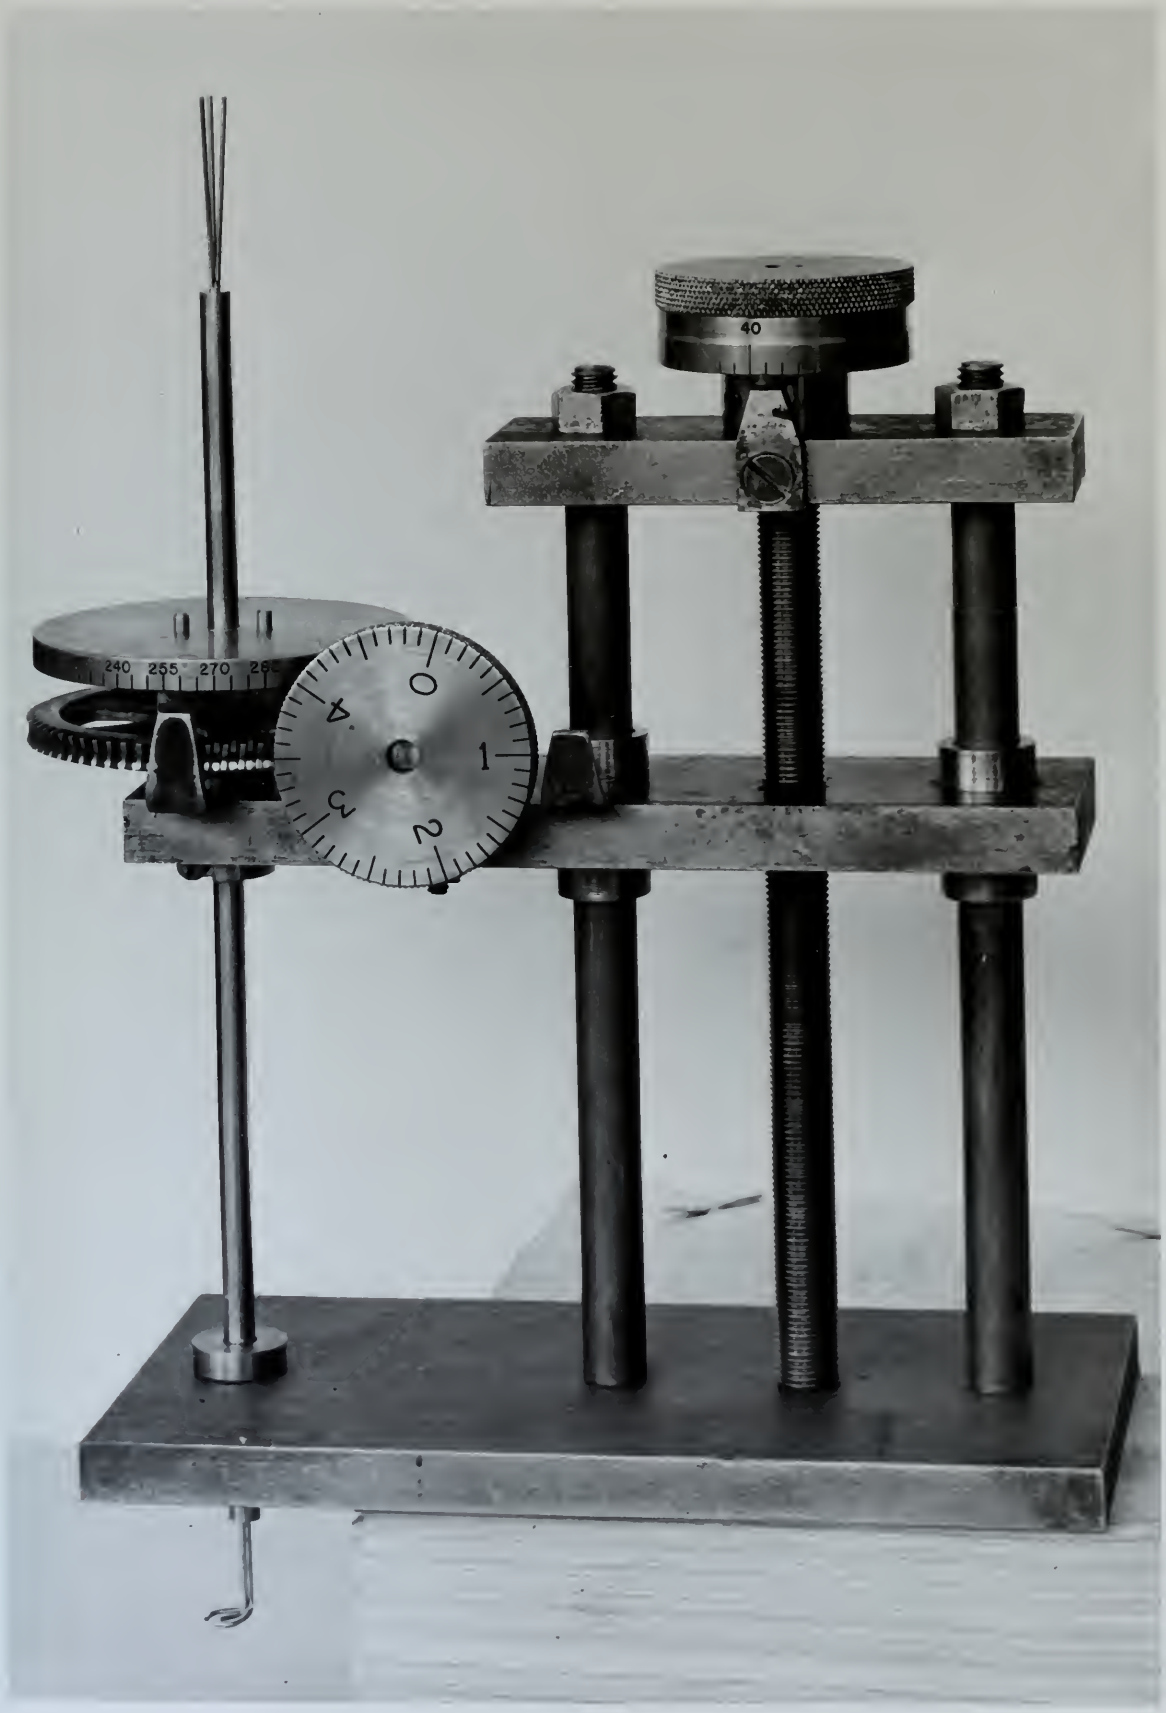

Traversing Mechanism -- Showing Claw-Type Yaw Head

Figure 11

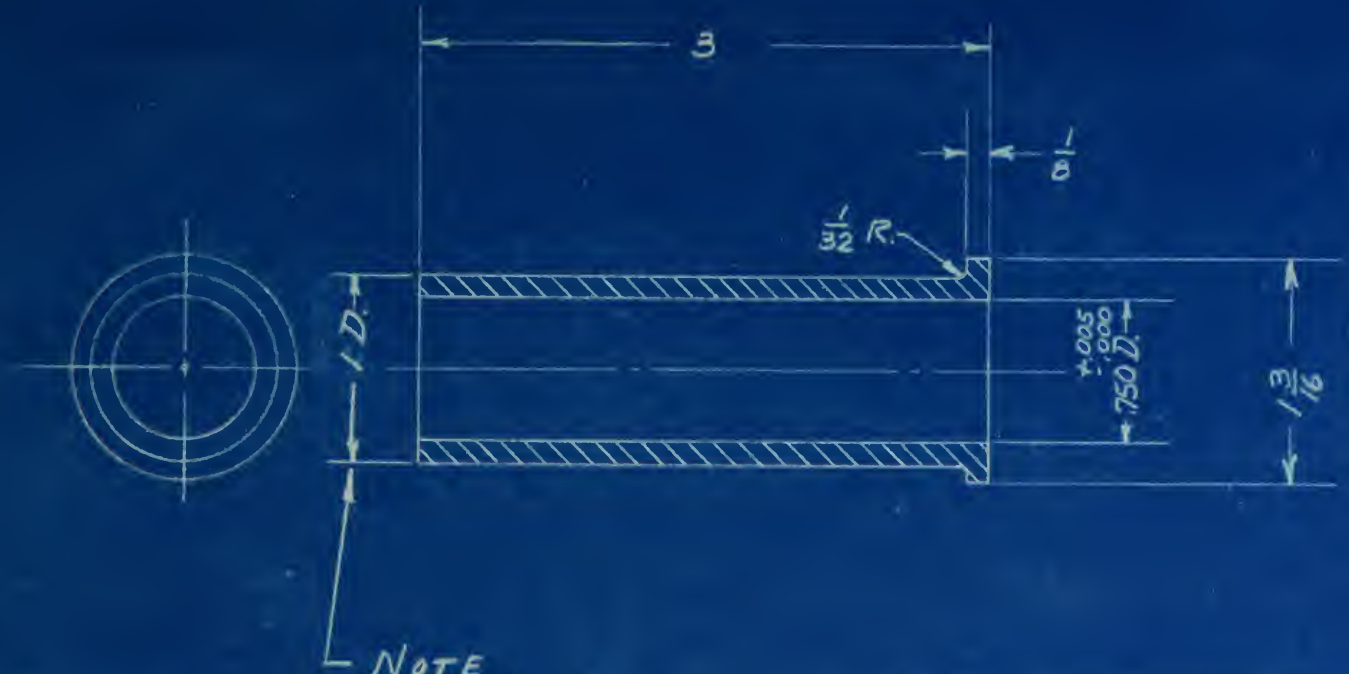

NOTE
PRESS FIT IN
PIECE N-1214
AFTER ASSEMBLY

NO.	MATERIAL BRONZE	NO. REQ. 1
MASSACHUSETTS INSTITUTE OF TECHNOLOGY GAS TURBINE LABORATORY		
BEARING SLEEVE		
DRAWN BY Gy	DATE 2-17-49	
CHECKED BY	SCALE FULL	
NEXT ASSEM.	N-1210	



NO. 1	MATERIAL STL	NO. REQ. 1


MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

COLLAR

DRAWN BY G	DATE 2-19-49
CHECKED BY	SCALE FULL
[illegible]	N - 1211



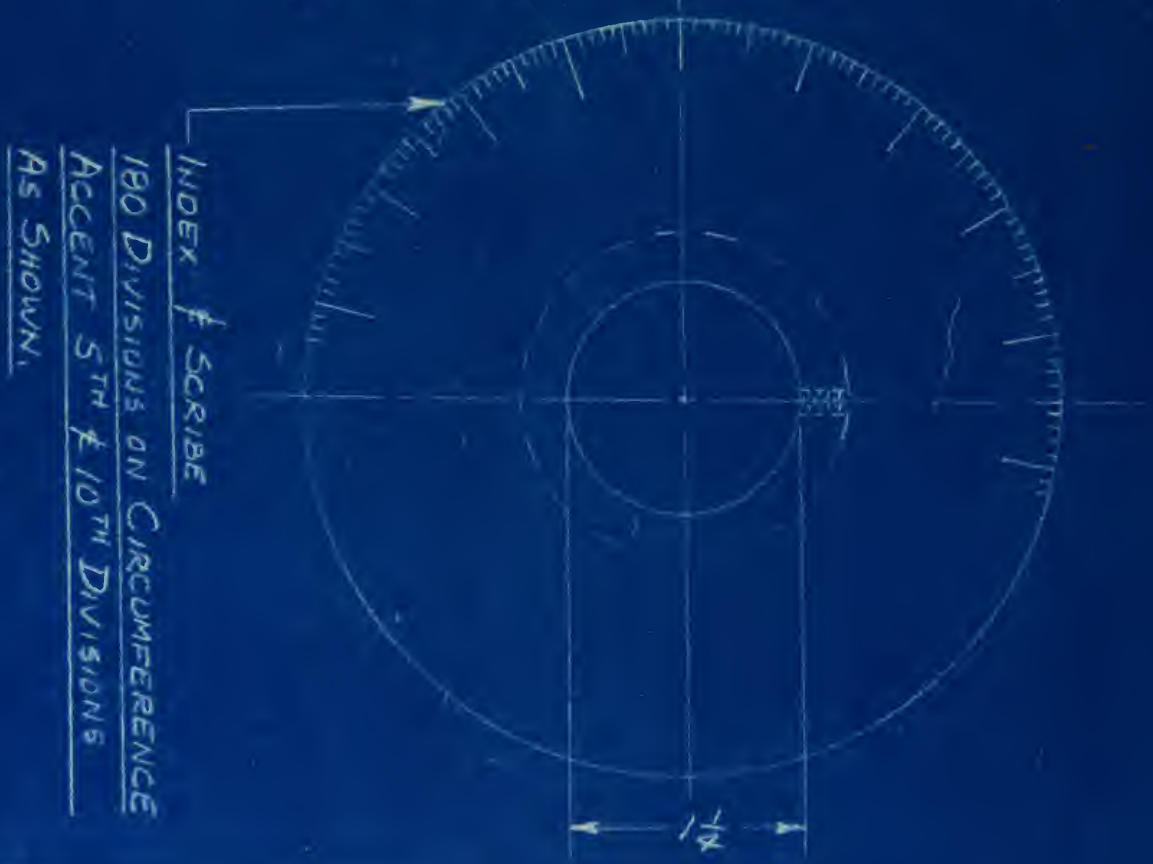


NO	MATERIAL	NO. REQ.
1	STL	1

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

QUADRANT

2-19-49 FULL SCALE

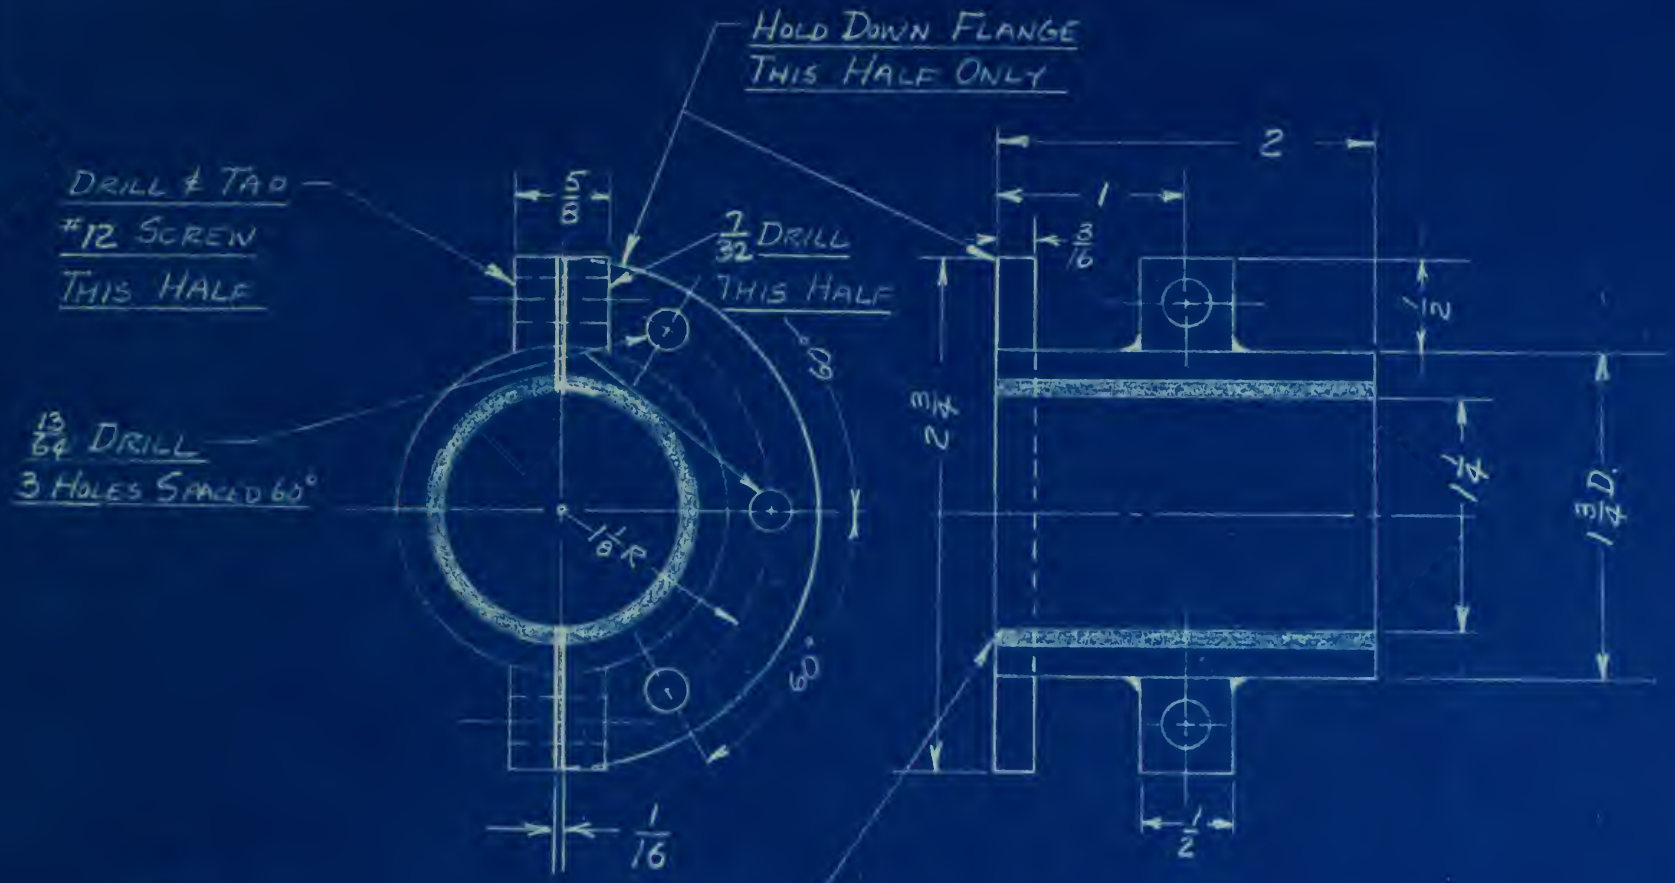

NOTE:
WELD LUGS TO SHELL
BEFORE SPLITTING SHELL


NOTE:
TEST AFTER ASSEMBLY
CLAMP MUST RESIST 150 INCH-POUNDS
OF TORQUE ON 1 1/4" SHAFT

BRAKE LINING
OR SIMILAR MAT'L - 3/32 APPROX.
RIVET TO SHELL - FLUSH INSIDE

TWO HALVES
REQ'D

FULL SCALE

NO.	MATERIAL STL.	NO REQ
MASSACHUSETTS [illegible] TECHNOLOGY		
GAS TURBINE LABORATORY		
FRICTION CLAMP		

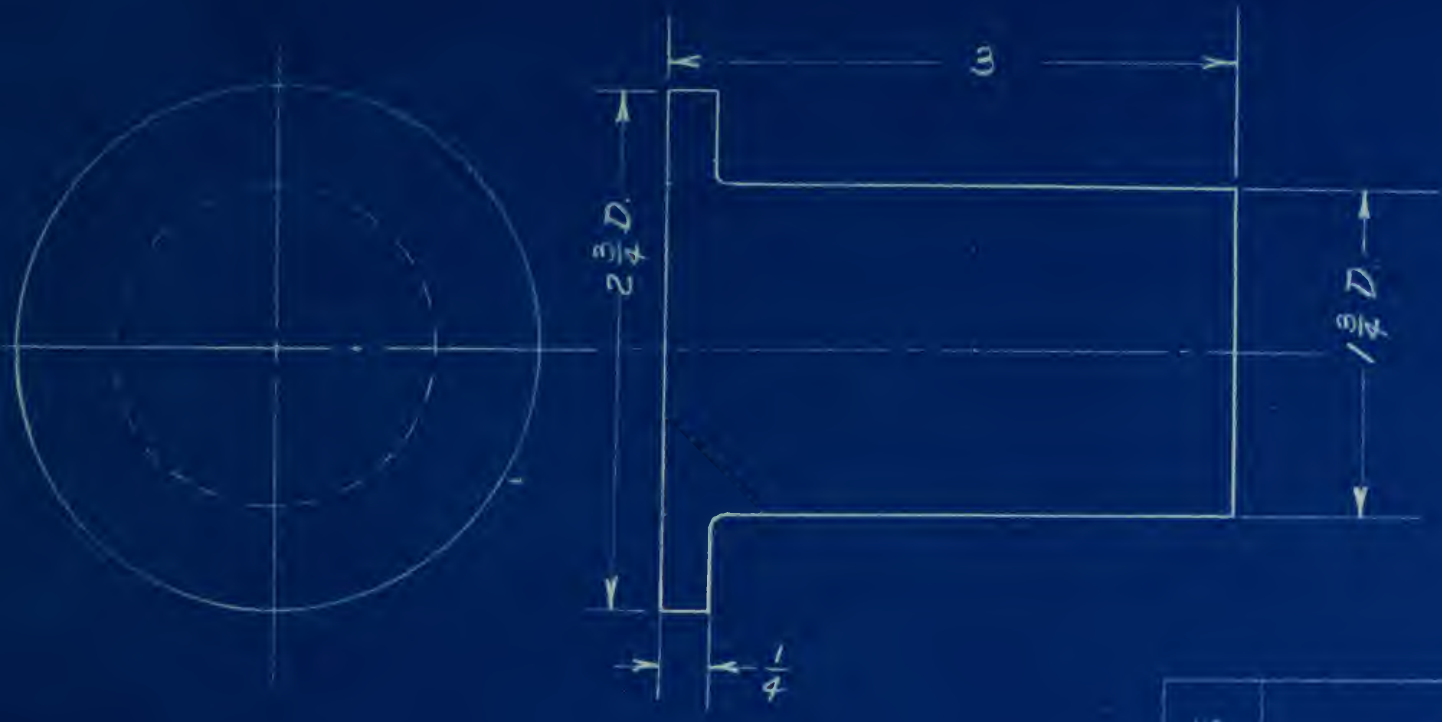

NO.	MATERIAL	NO. REQ.
	STL.	1

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

MOUNTING PAD

DRAWN BY G.	DATE 2-17-49
CHECKED BY	SCALE FULL






NO.	MATERIAL BRONZE	NO. REQ. 1

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

THRUST WASHER

DRAWN BY G	DATE 2-17-49
CHECKED BY	SCALE FULL

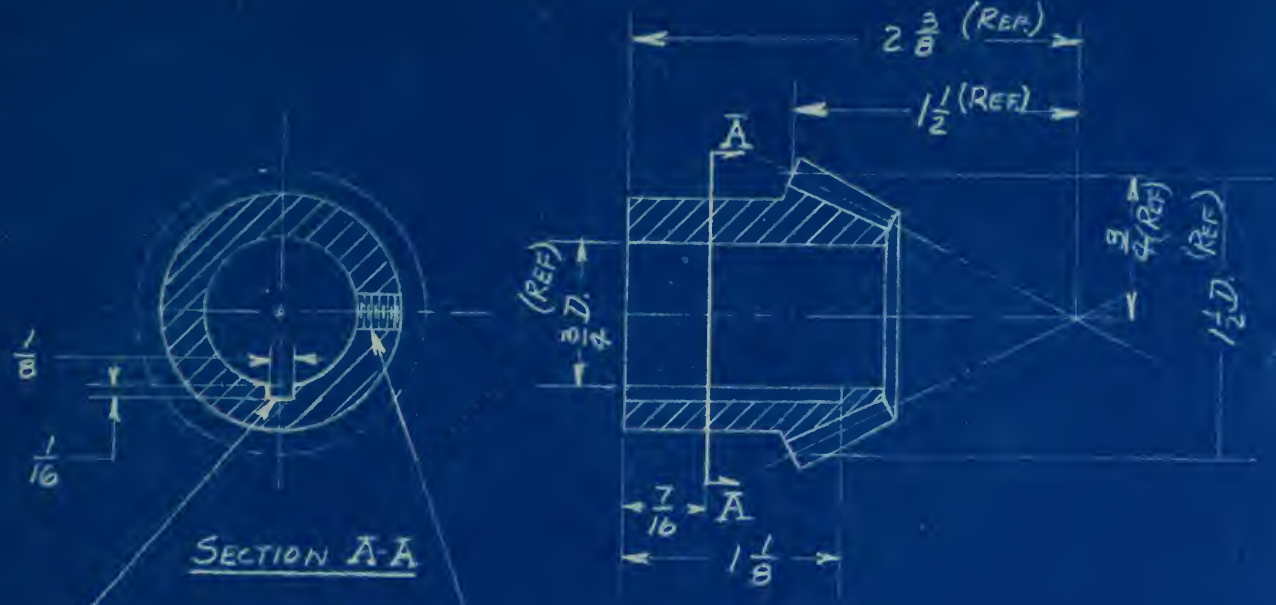

SECTION A-A

KEYWAY
1/8 LENGTH
#405 WOODRUFF KEY

DRILL & TAP
#10 SET SCREW

NO	MATERIAL STL.	NO REQ 1
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
BEVEL PINION		
DRAWN BY G.	DATE 2-17-49	
CHECKED BY	SCALE FULL	

BOSTON GEAR COMPANY

L-152 BEVEL PINION





NO.	MATERIAL	NO. REQ'D
A	STEEL BACKED BRONZE BEARING	2
B	STEEL COLLAR	2

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY


SHAFT BEARINGS AND COLLARS

DRAWN BY LASTER	DATE 2-17-49
CHECKED BY	SCALE FULL






NO.	MATERIAL STL	NO. REQ. 6
MASSACHUSETTS INSTITUTE OF TECHNOLOGY GAS TURBINE LABORATORY		
Boss		
DRAWN BY Cq	DATE 2-25-49	
CHECKED BY	SCALE FULL	
DWG. ASSY. N-4221	N 1222	

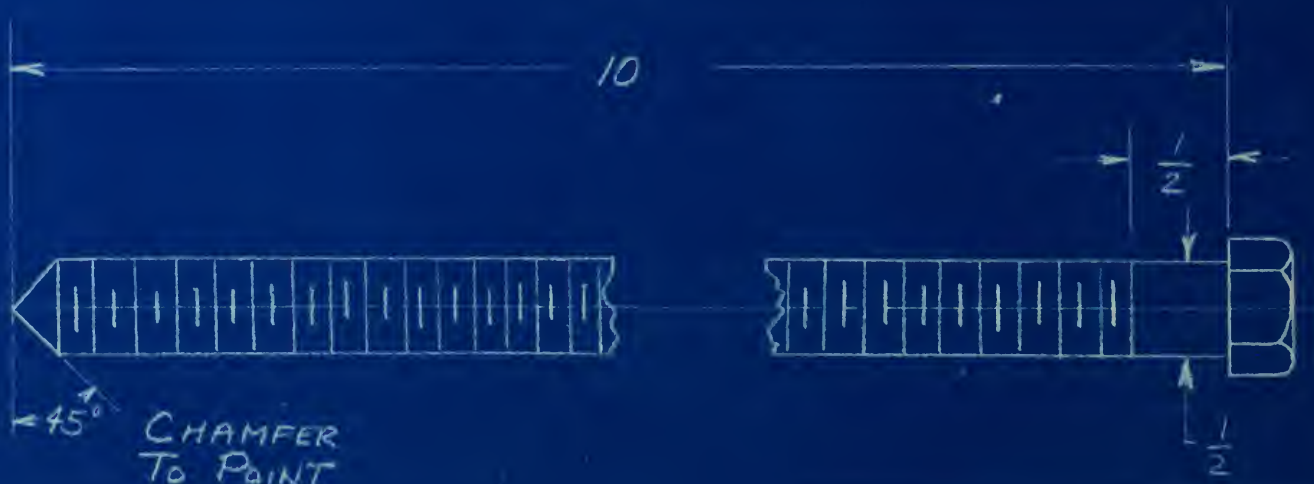

CHAMFER TO POINT

1/2" BOLT THREADED TO WITHIN 1/2" OF HEAD.

NO.	MATERIAL STL	REQ'D 6
MASSACHUSETTS INSTITUTE OF TECHNOLOGY GAS TURBINE LABORATORY		
BOLT		
DRAWN BY Cq	DATE 2-25-47	
CHECKED BY	SCALE FULL	
NEXT ASSEM.	N- 1223	

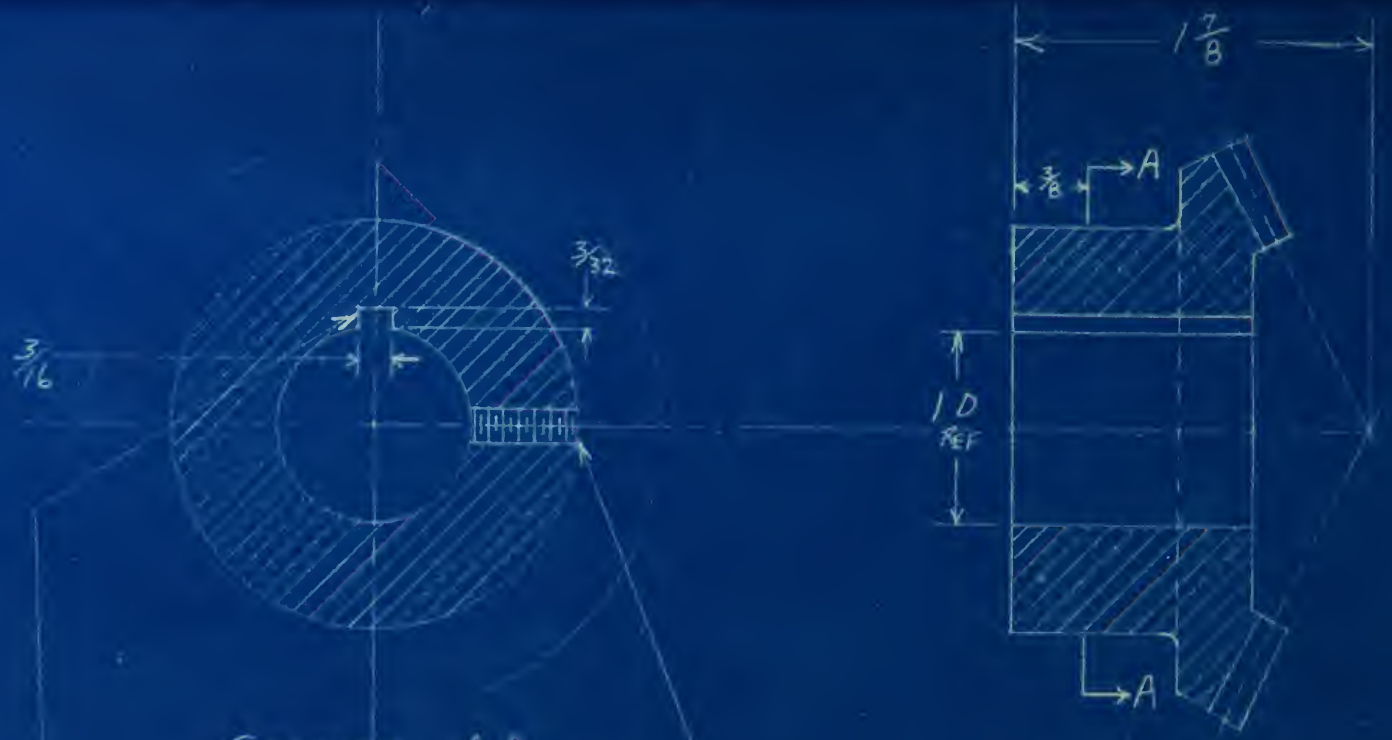

SECTION AA

KEYWAY FOR #606 WOODRUFF KEY

DRILL + TAP #10 SETSCREW


BOSTON GEAR COMPANY
L-152 BEVEL GEAR


NO	MATERIAL	NO. REQ

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
GAS TURBINE LABORATORY

BEVEL GEAR


DRAWN BY L	DATE 2-25-49
CHECKED BY	SCALE FULL
NEXT ASSEM. N-4224	N - 1225

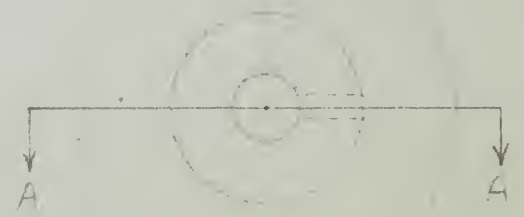

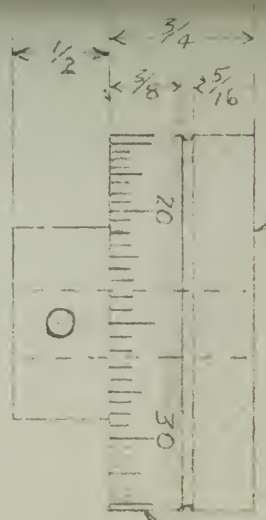

KNURLED KNOB


50 DIVISIONS
"ZERO OPPOSITE SET SCREW
COUNTER CLOCKWISE

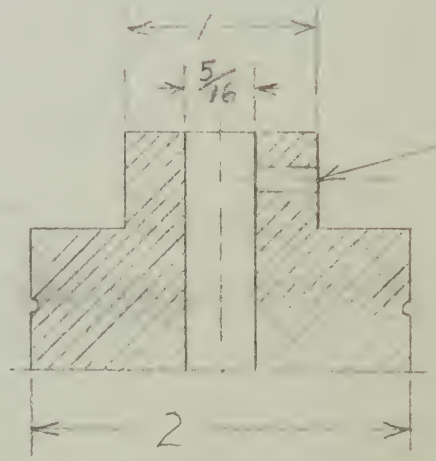


DRILL & TAP
#5 SET SCREW


SECTION AA

NO.	MATERIAL BRASS
NAME	
GAS TURBINE LABORATORY	
MICROMETER HEAD FOR TRAVERSING MECH.	
DRAWN BY LAS	DATE 2-25-47
CHECKED BY	SCALE FULL
DRAWING NO. N-2226	NO. 1627

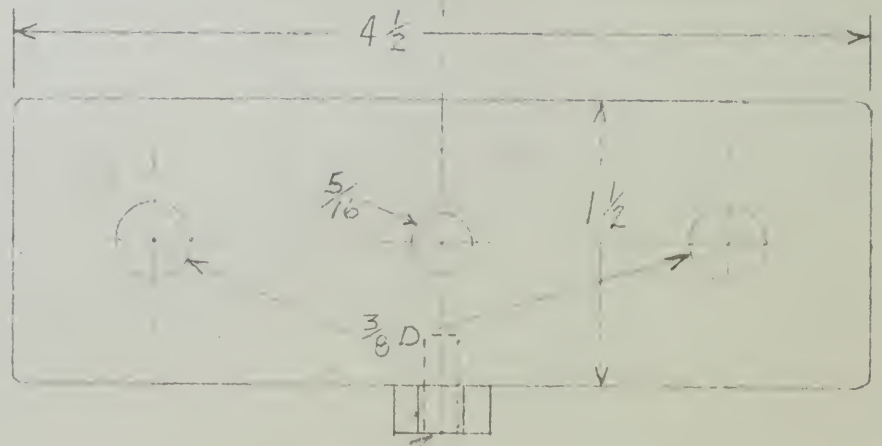

FASTENED
#10 MACHINE SCREW

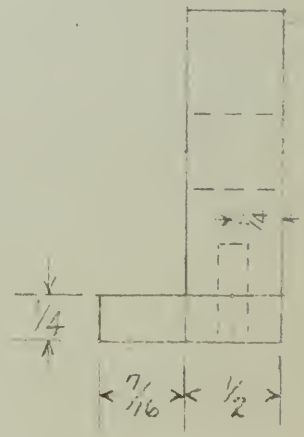

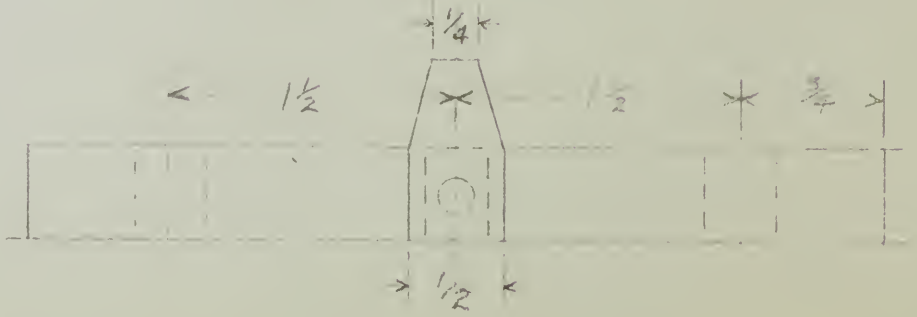

STEEL


END PLATE

TRAV. MECH.


LASTIC : 3-1-43

FOLD


N-22[illegible] N - 1228

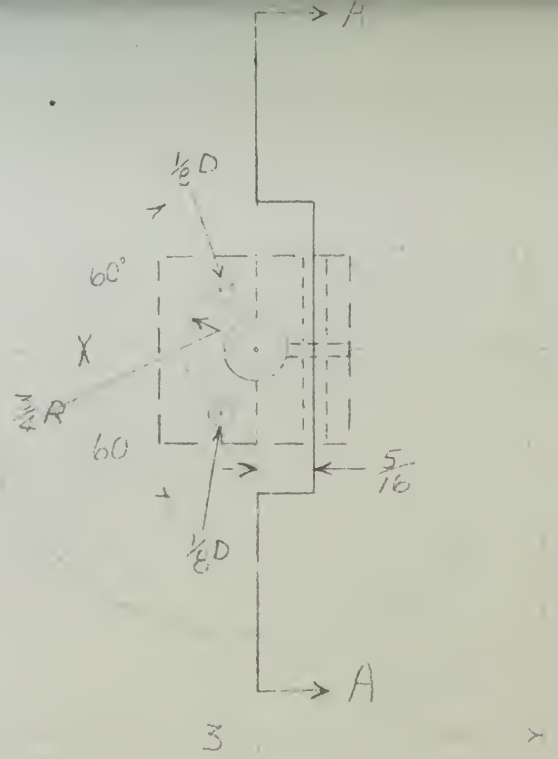

NOTE
SEE DWG N-1232
AND N-2226

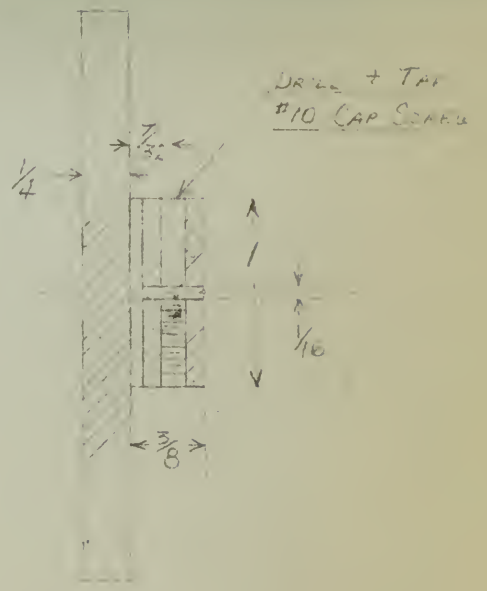


SECTION AA

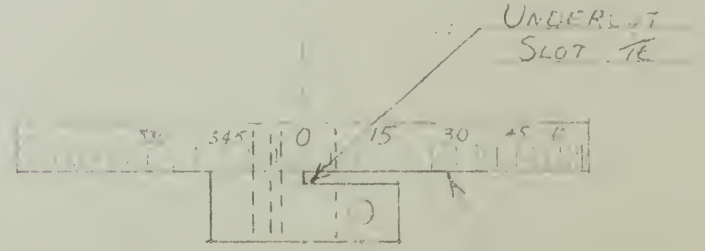



SCRIBE MARK EVERY 5°
NUMBERED EVERY 15°
COUNTER CLOCKWISE

NO.	MATERIAL BRASS	NO REQ
MASS. INST. OF TECHNOLOGY		
GAS TURBINE LABORATORY		
QUADRANT FOR TRAVERSING MECH.		
DRAWN BY LASTER	DATE 3-1-44	
CHECKED BY	SCALE FULL	
NEXT ASSY N-2226	N - 1229	

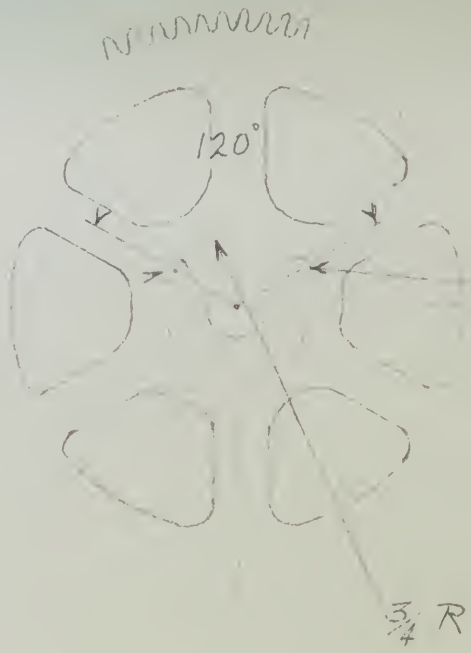

1/8 D
DRILL 3/16 DEEP
FOR DRIFT PIN

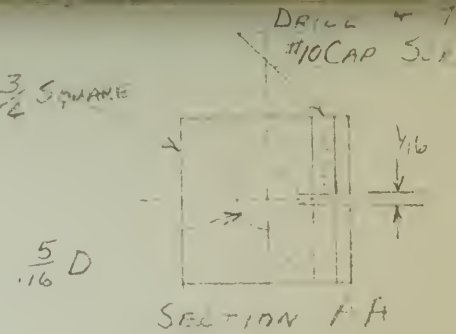

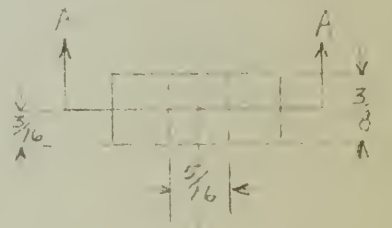



BOSTON GEAR CO WORM GEAR G-1039


NOTE

SEE DRAWING NO. N-1229 AND N-2226

NO.	MATERIAL	NO. REQ
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
CAMBRIDGE LABORATORY		
WORM GEAR + COLLAR TRAVERSING MECH.		
DRAWN BY LAISTER	DATE 3-4-47	
CHECKED BY	SCALE FULL	
NEXT ASSEM. N-2226	N-1232	

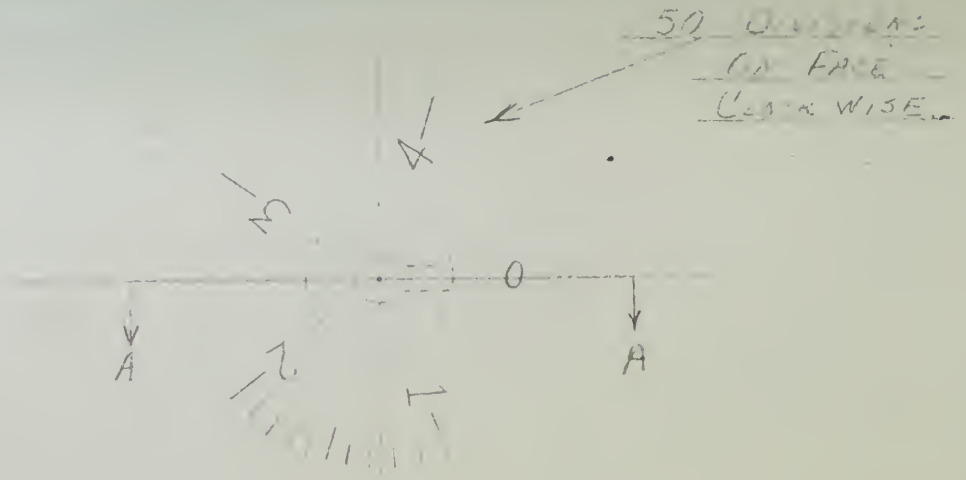


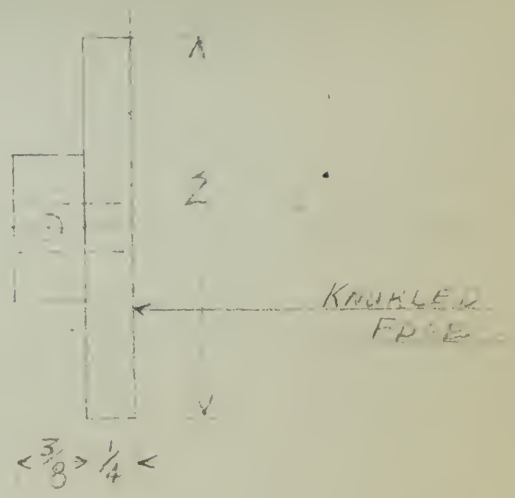

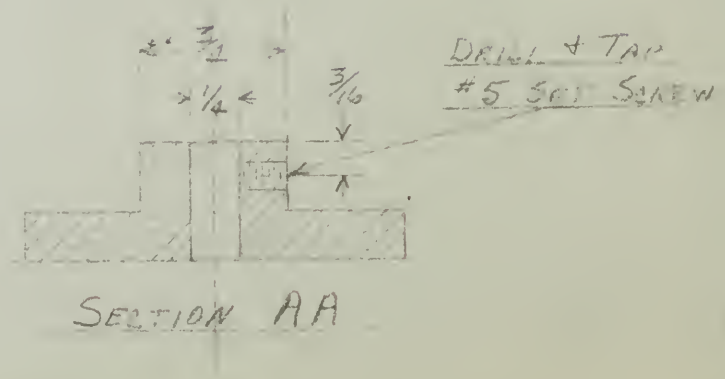


Section AA

NO.	MATERIAL Brass	NO. REQ
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
Micrometer Head Traversing Mech		
DRAWN BY Lester	DATE 3-4-49	
CHECKED BY	SCALE Full	
NEXT ASSEM. N-2226	N - 1233	

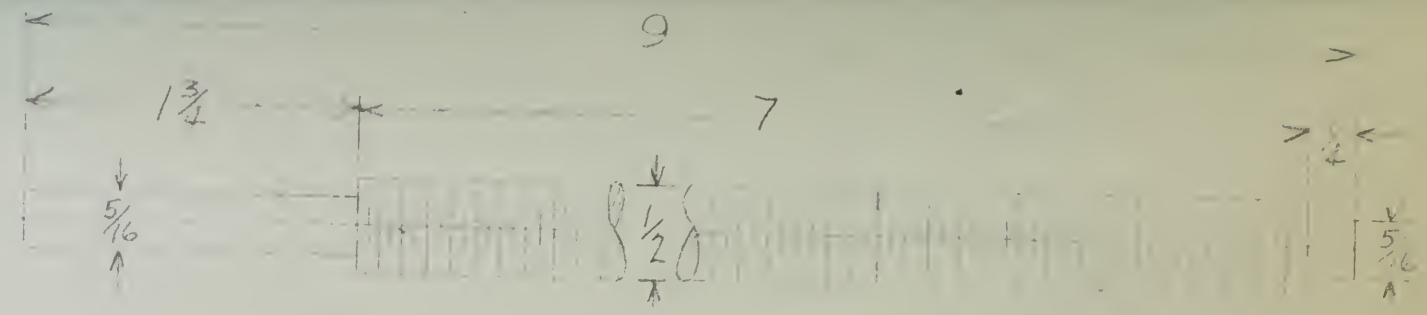


A.S.A. STANDARD FINE THREADS
20 THREADS PER INCH

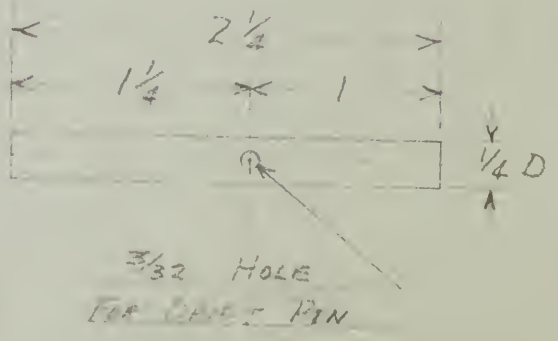

NO.	MATERIAL STEEL	NO. REQ'D
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
TRAVERSING SCREW AND WORM SHAFT FOR TRAV MECH		
DRAWN BY LASTER	DATE 3-4-44	
CHECKED BY	SCALE FULL	
NEXT ASSEM. N-2226	N = 1234	



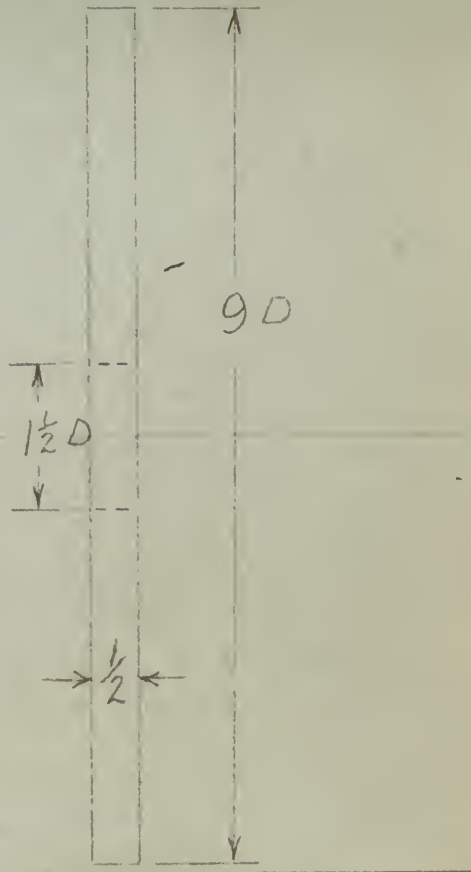

MATERIAL – WOOD


MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

SPACER

INNER CASING AND SHAFT

DRAWN BY LAISTER	DATE 3-21-47
CHECKED BY	SCALE ½
NEXT ASSEM.	N - 1239

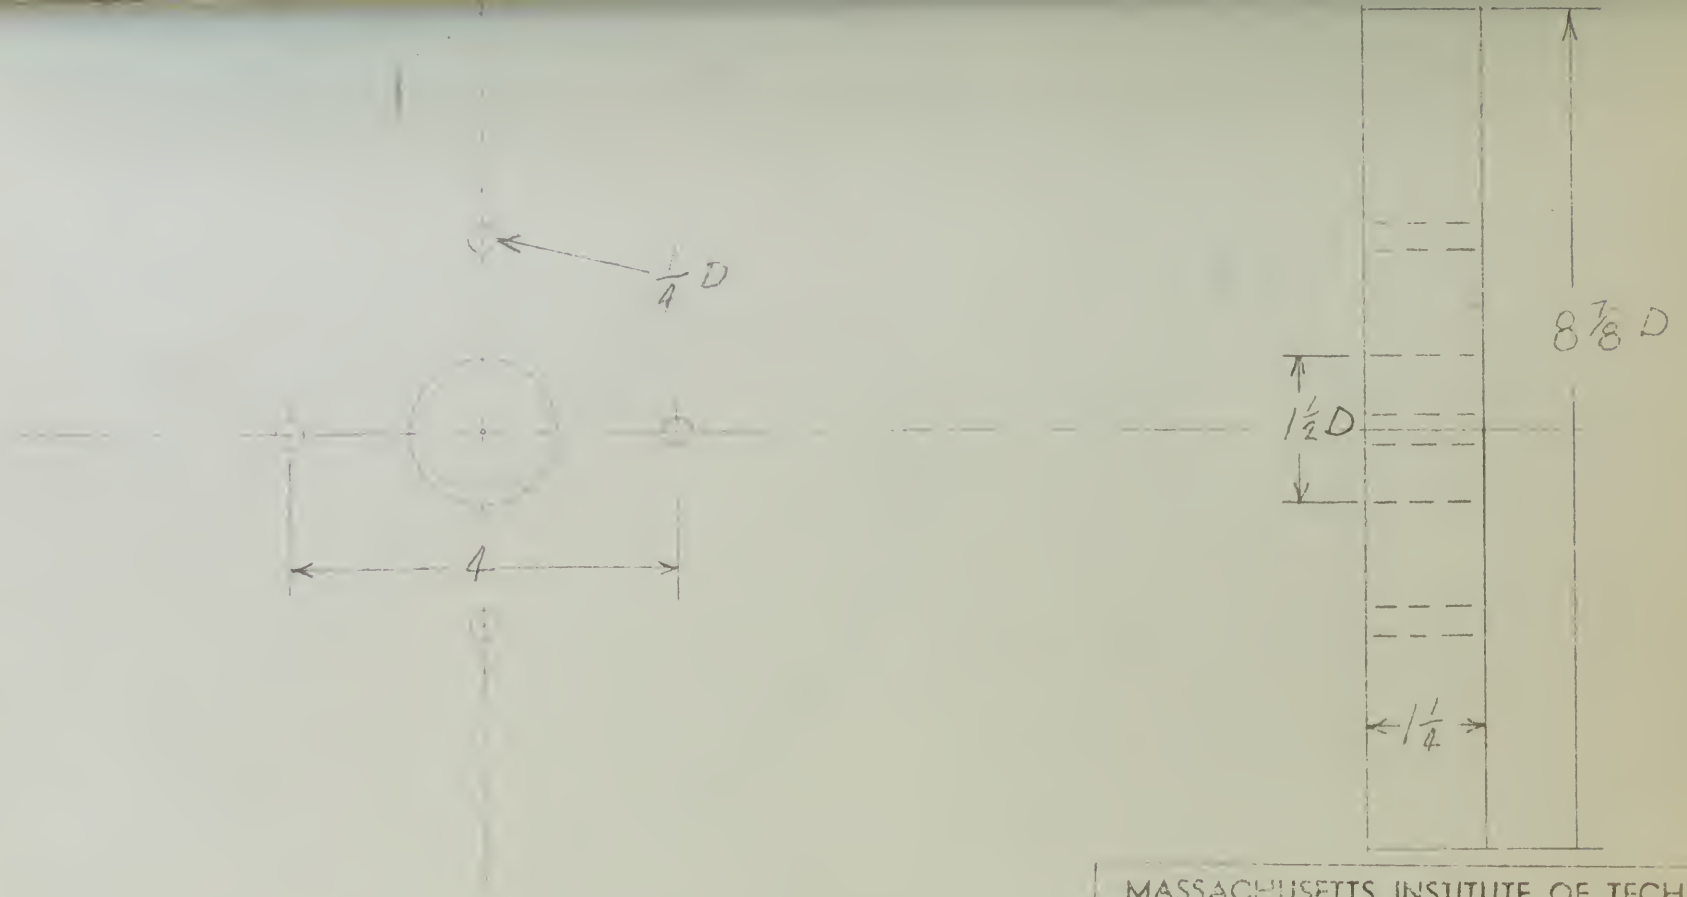

MATERIAL — WELD

MASSACHUSETTS INSTITUTE OF TECHNOLOGY


GAS TURBINE LABORATORY

SPACER

INNER CASING AND SHAFT

DRAWN BY LASTER	DATE 3-21-47
CHECKED BY	SCALE 1/2
NEXT ASSEM.	M E 1240



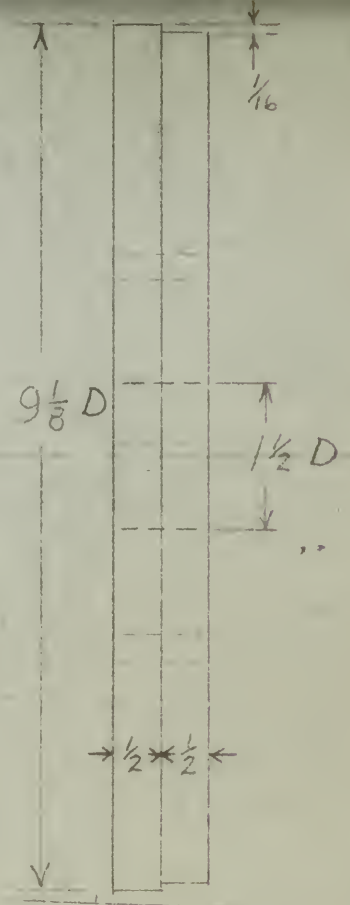

MATERIAL — WOOD


MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

SPACER

INNER CASING AND SHAFT

DRAWN BY LASTER	DATE 5-21-40
CHECKED BY	SCALE ½
NEXT ASSEM.	N = 1241

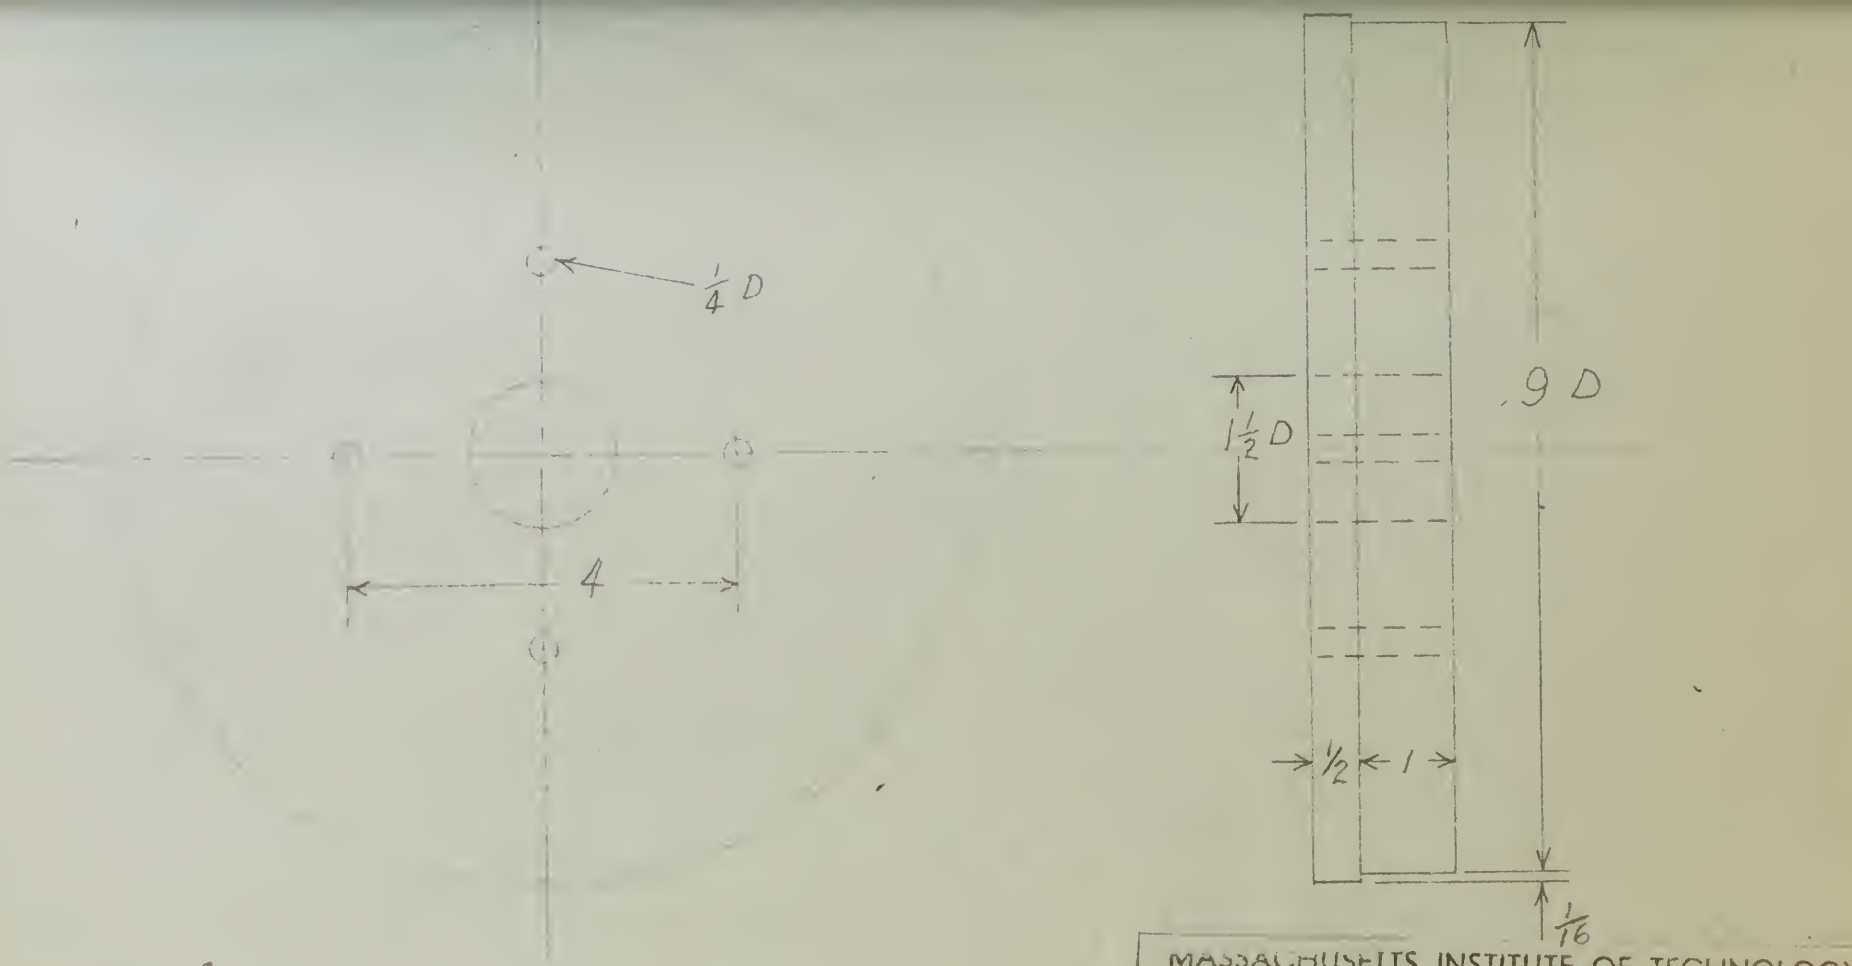

MATERIAL - WOOD


MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

SPACER

INNER CASING AND SHAFT

DRAWN BY LASTER	DATE 3-21-49
CHECKED BY	SCALE ½
NEXT ASSEM.	N - 1242

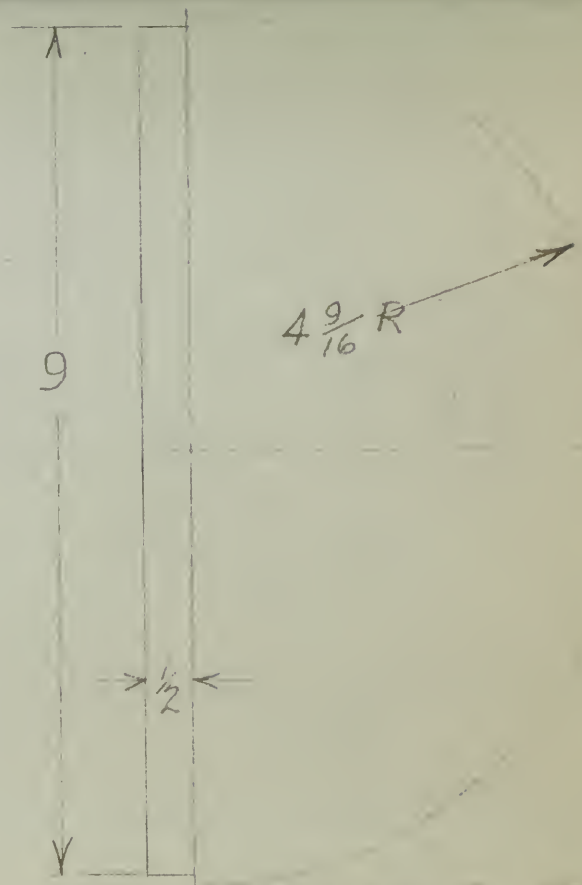

MATERIAL - BALSA

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

NOSE PIECE

INNER CASING

DRAWN BY LASTER	DATE 3-21-49
CHECKED BY	SCALE 1/2
NEXT ASSEM.	N - 1243

THIS DWG IN CUSTODY OF

PROF. W.R. HAWTHORNE

MIT GAS TURBINE LABORATORY

NO	MATERIAL	NO REQ.

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

INLET GUIDE VANE ASSEMBLY

DRAWN BY	DATE
CHECKED BY	SCALE
NEXT ASSEM.	N-5254

THIS DWG IN CUSTODY OF

PROF W R HAWTHORNE

MIT GAS TURBINE LABORATORY


NO	MATERIAL	NO. REQ

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY

INLET GUIDE VANE

DR	DATE
CHK'D BY	SCALE
NEXT ASSEM.	N-5255

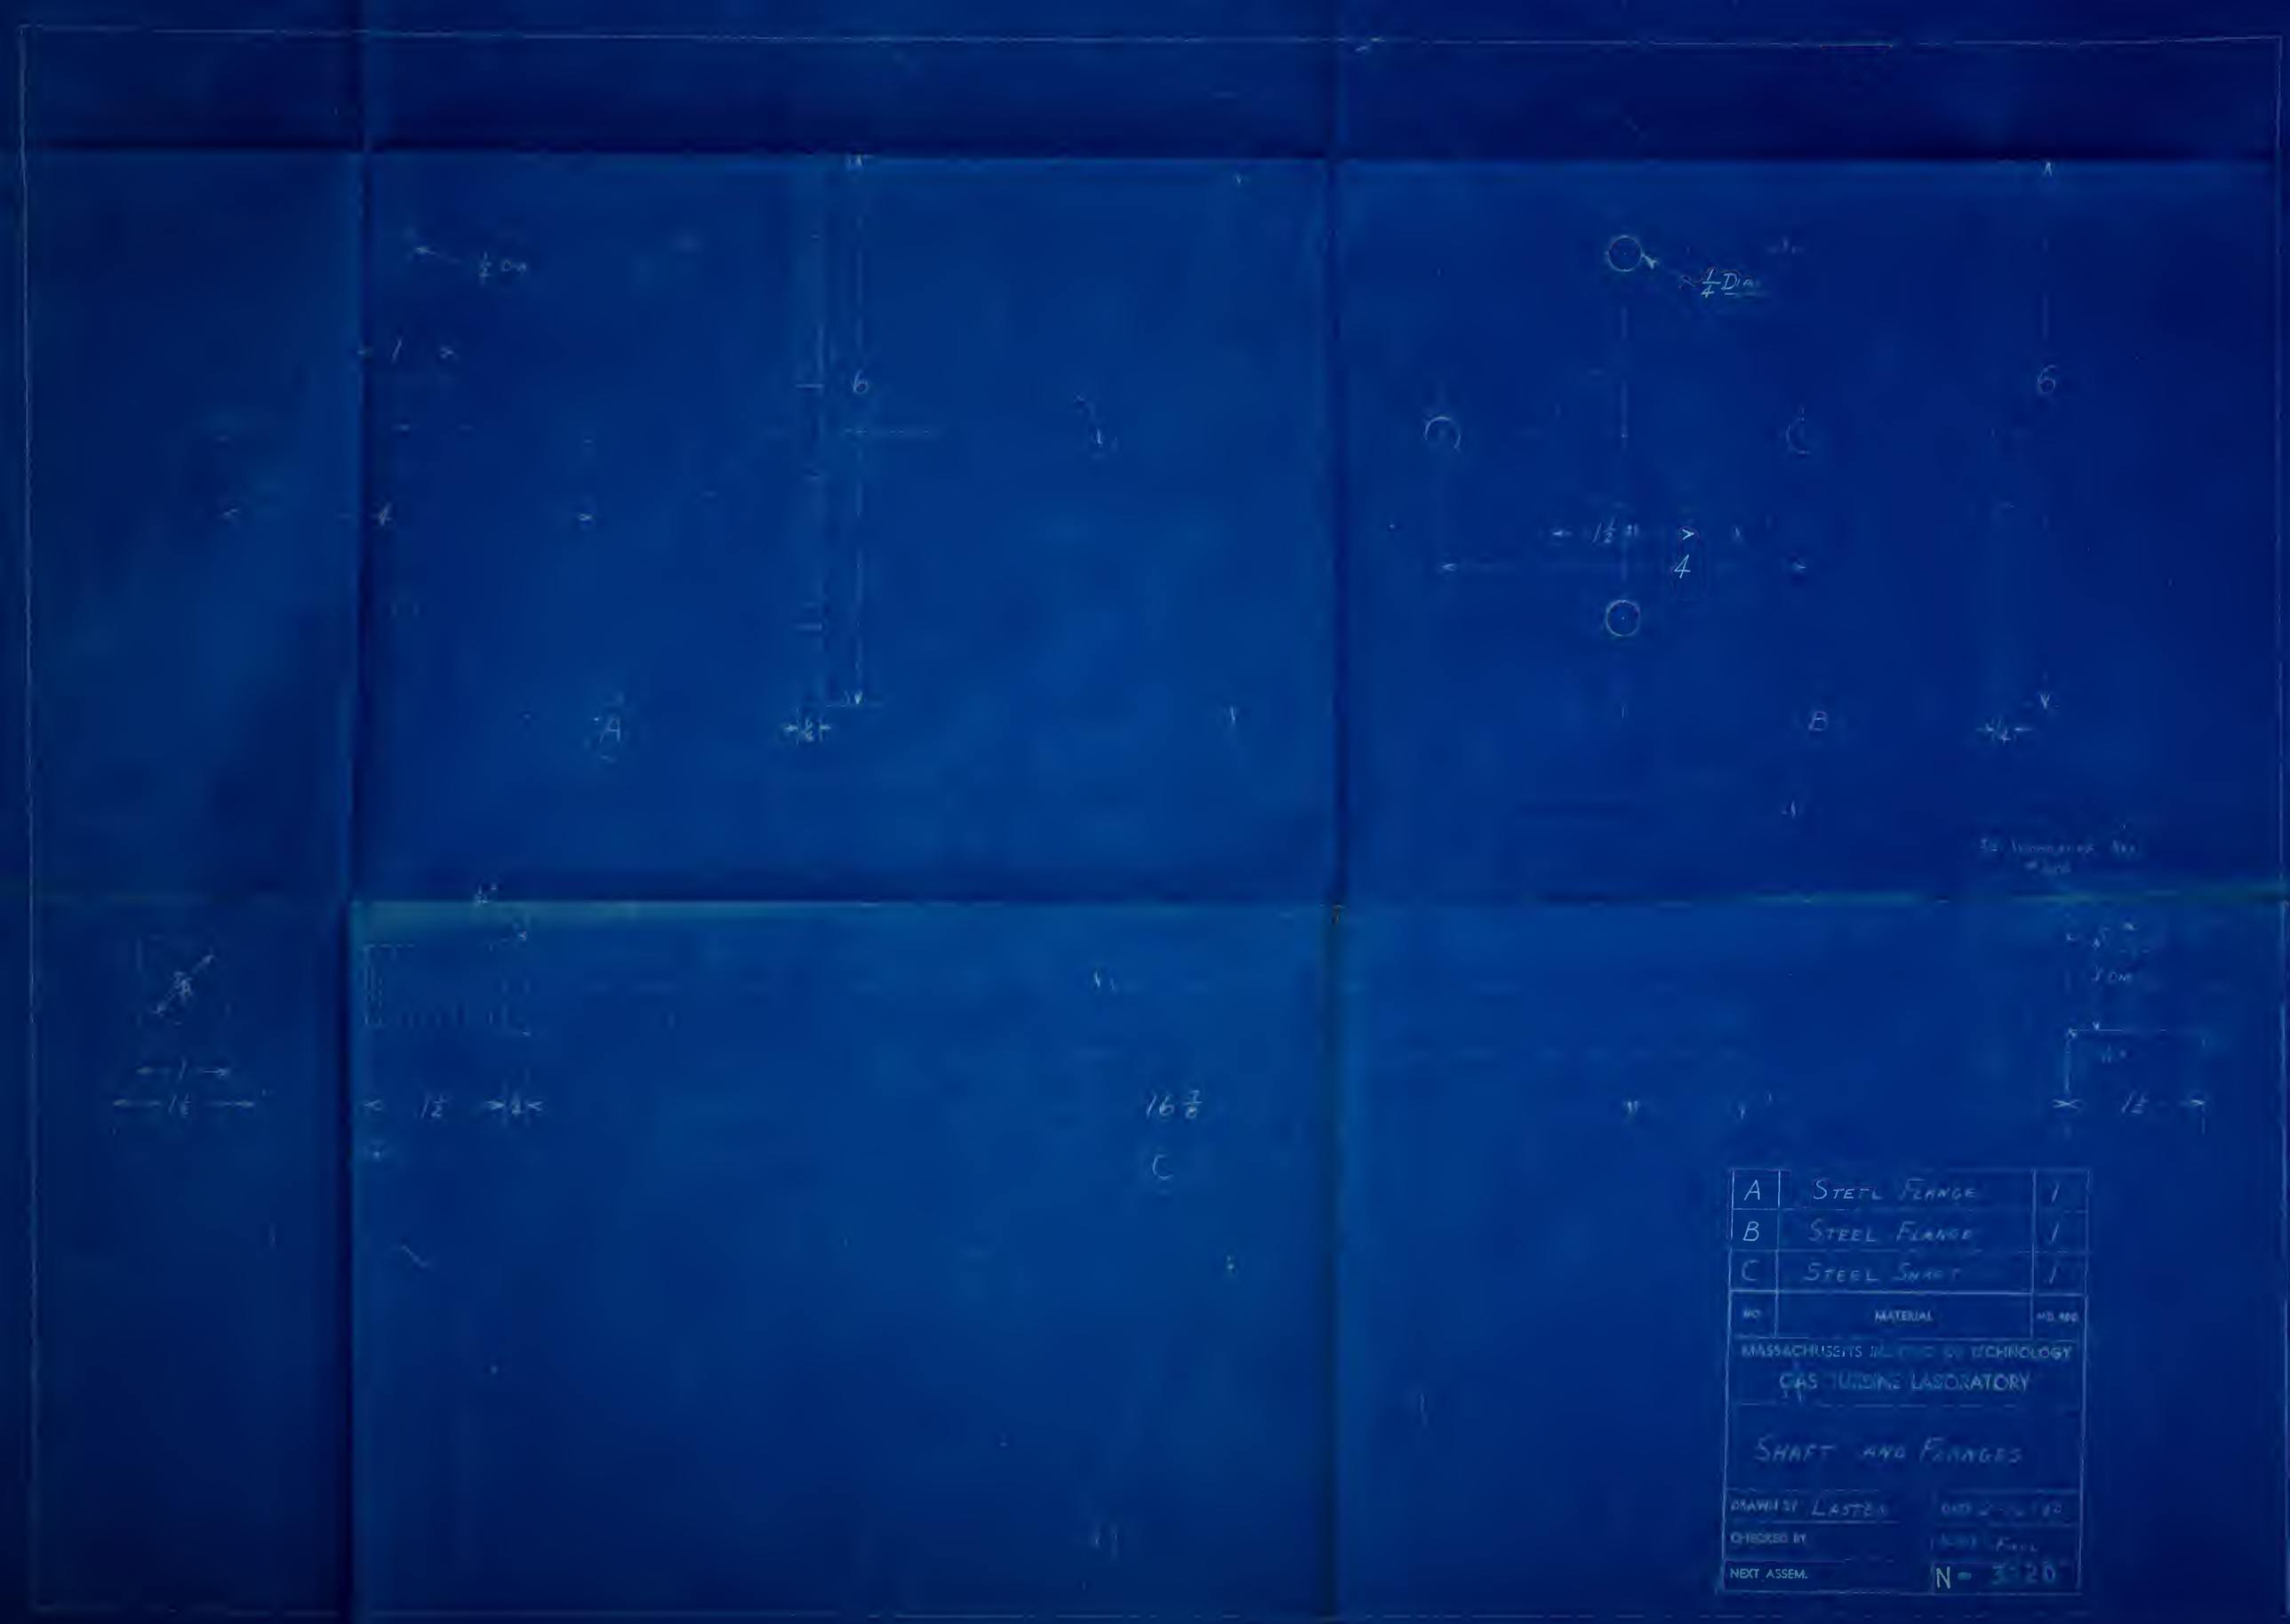
1/4 Dia.
6
1 1/2"
4
B
1/4
16 7/8
C
12
A
1/4
12
A Steel Flange 1
B Steel Flange 1
C Steel Shaft 1
NO. MATERIAL NO. REQ.
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
GAS TURBINE LABORATORY
SHAFT AND FLANGES
DRAWN BY
CHECKED BY
NEXT ASSEM.
N-3-20





SECTIONS AA



SECTION BB


NO	MATERIAL	NO REQ.
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
AFTER SECTION INNER CASING		
DRAWN BY LASTER	DATE 2-11-49	
CHECKED BY	SCALE ½	
NEXT ASSEM.	NO 2218	



N-1225



MATERIAL	STEEL	1
MASSACHUSETTS [illegible] GAS TURBINE [illegible]		
SHAFT		
DRAWN BY [illegible]	DATE 2-16-43	
CHECKED BY	SCALE FULL	
NAVY ASSEM.	N 219	


SECTION C-C (.9R)

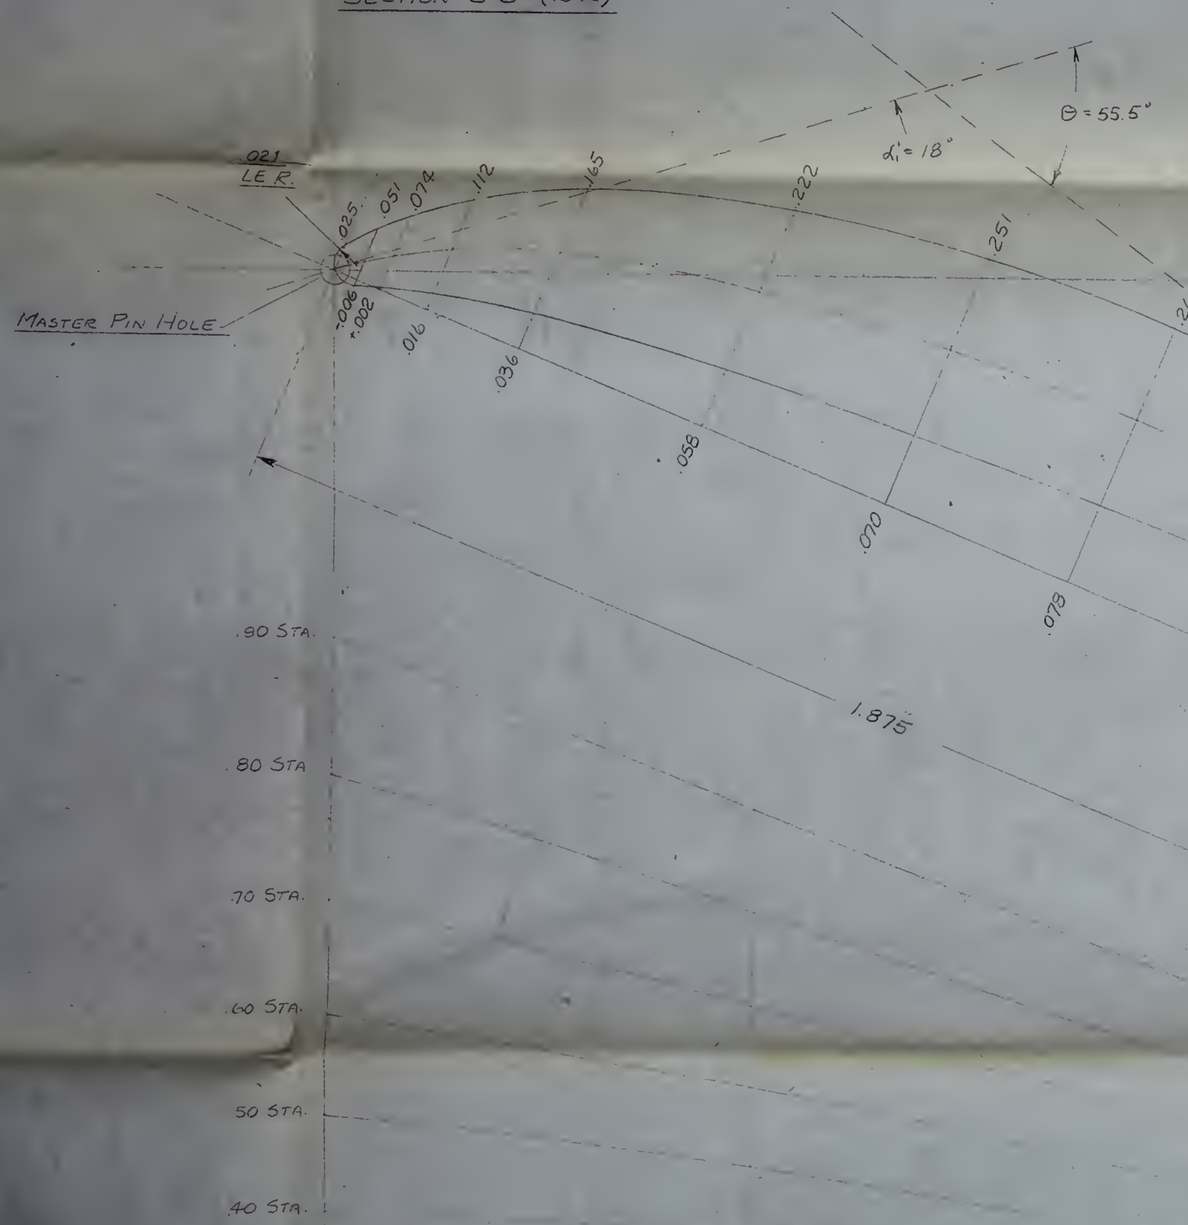

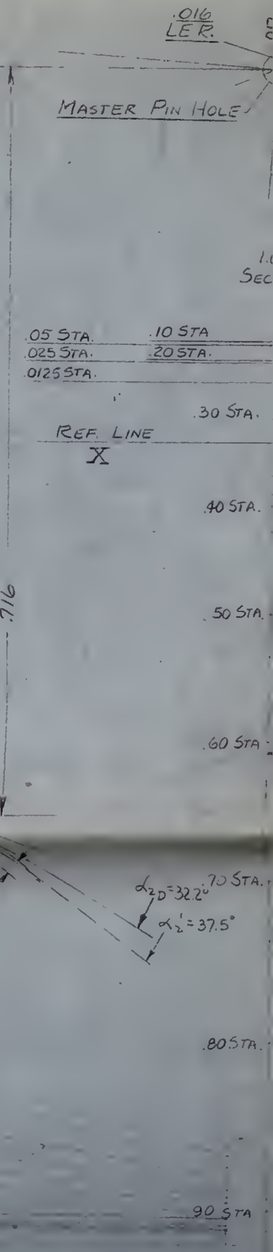



BETWEEN SECTION CONTOURS - LOWER SURFACE

SECTION A-A (.5R)

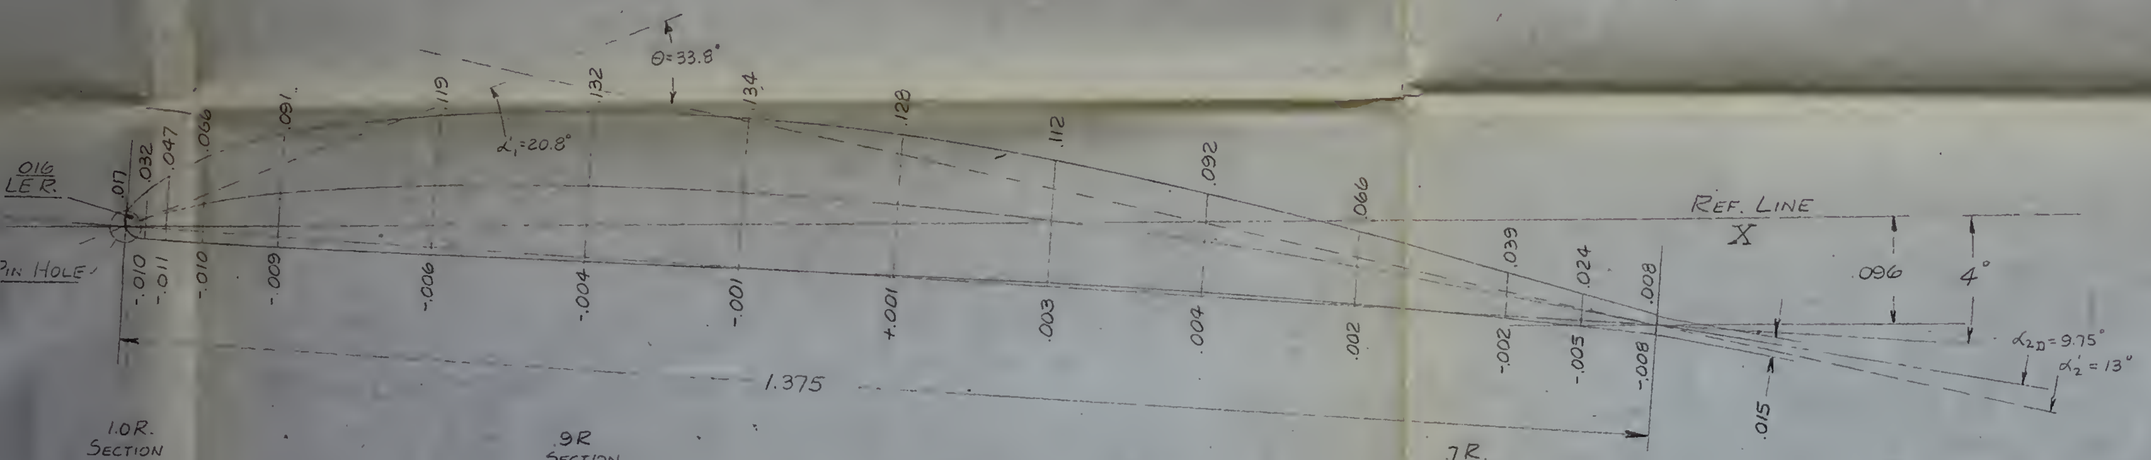

BETWEEN - SECTION CONTOURS - UPPER SURFACE

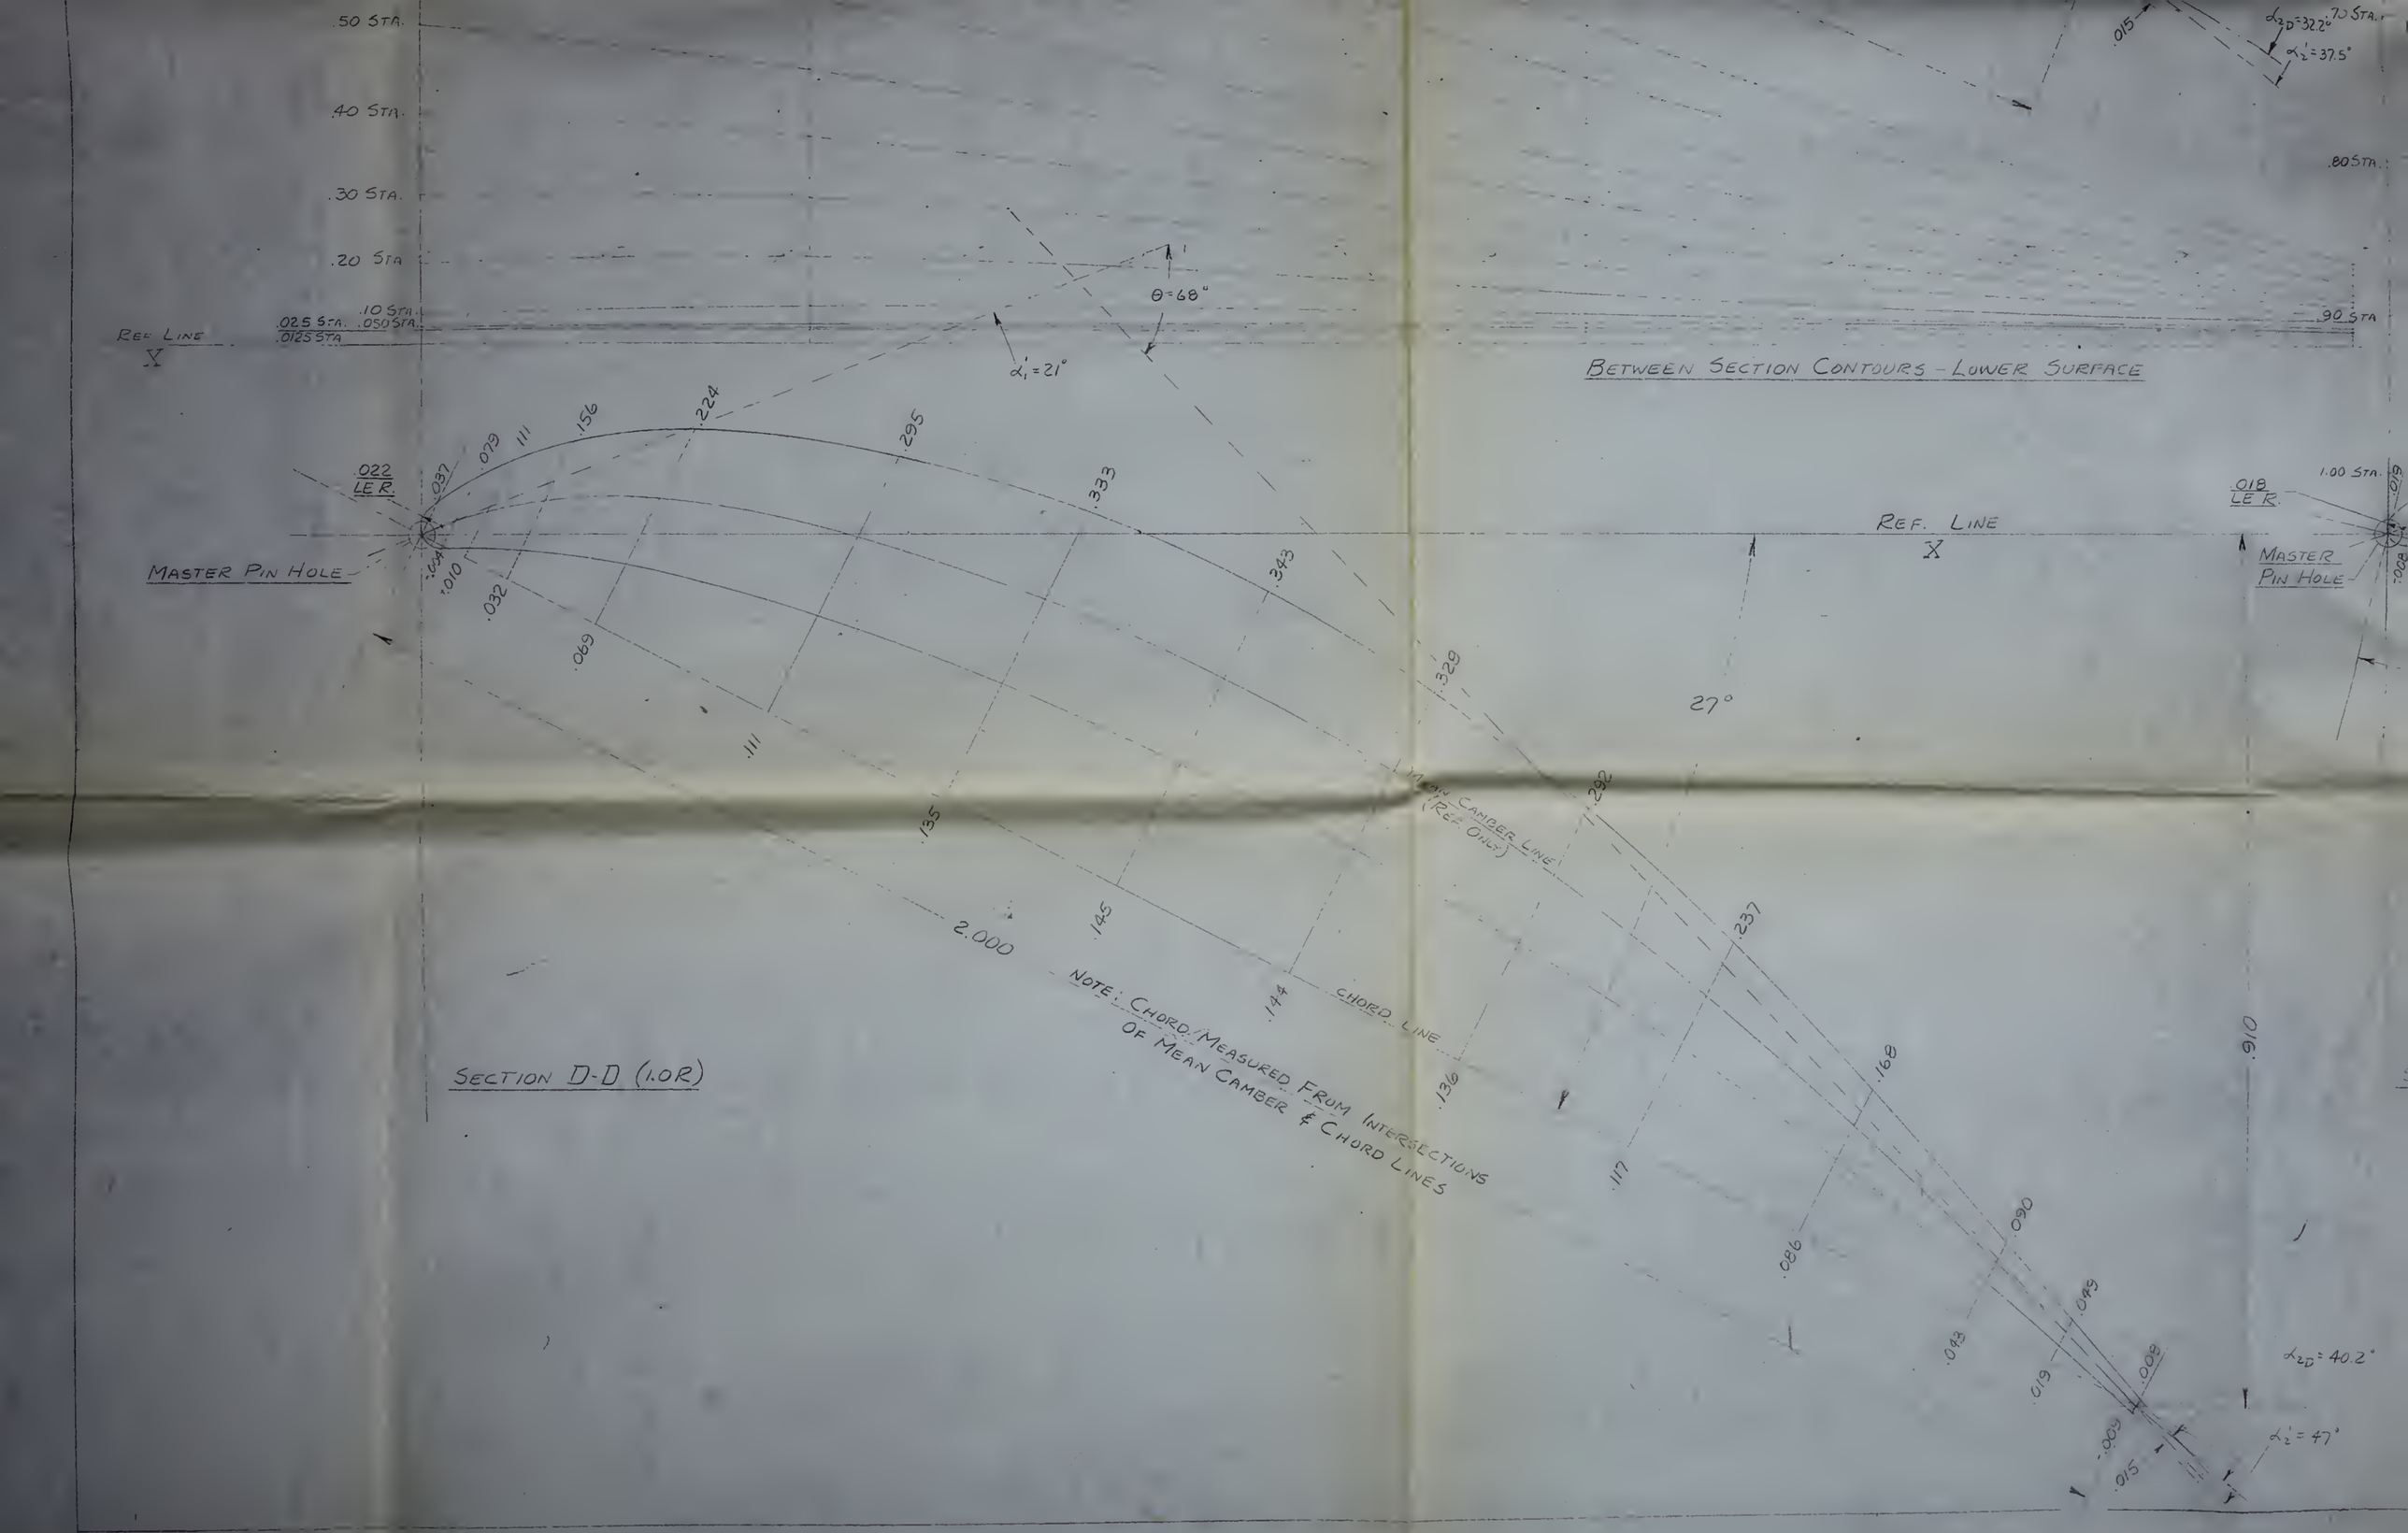
.50 STA.
.40 STA.
.30 STA.
.20 STA.
.10 STA.
.025 STA.
.050 STA.
.0125 STA
REF LINE
X
θ=68°
α'1=21°
.80 STA.
.90 STA
BETWEEN SECTION CONTOURS - LOWER SURFACE
.022
LE R.
.037
.073
.111
.156
.224
.295
.333
.343
MASTER PIN HOLE
.004
.010
.032
.069
.111
.135
.145
.144
CHORD LINE
.136
.117
.086
.090
.043
.045
.019
.008
.003
.015
.910
.329
.282
.237
.168
27°
REF. LINE
X
.018
LE R.
1.00 STA.
MASTER
PIN HOLE
α2D=32.2°
α'2=37.5°
α2D=40.2°
α'2=47°
MEAN CAMBER LINE
(REF ONLY)
2.000
NOTE: CHORD MEASURED FROM INTERSECTIONS
OF MEAN CAMBER & CHORD LINES
SECTION D-D (1.0R)

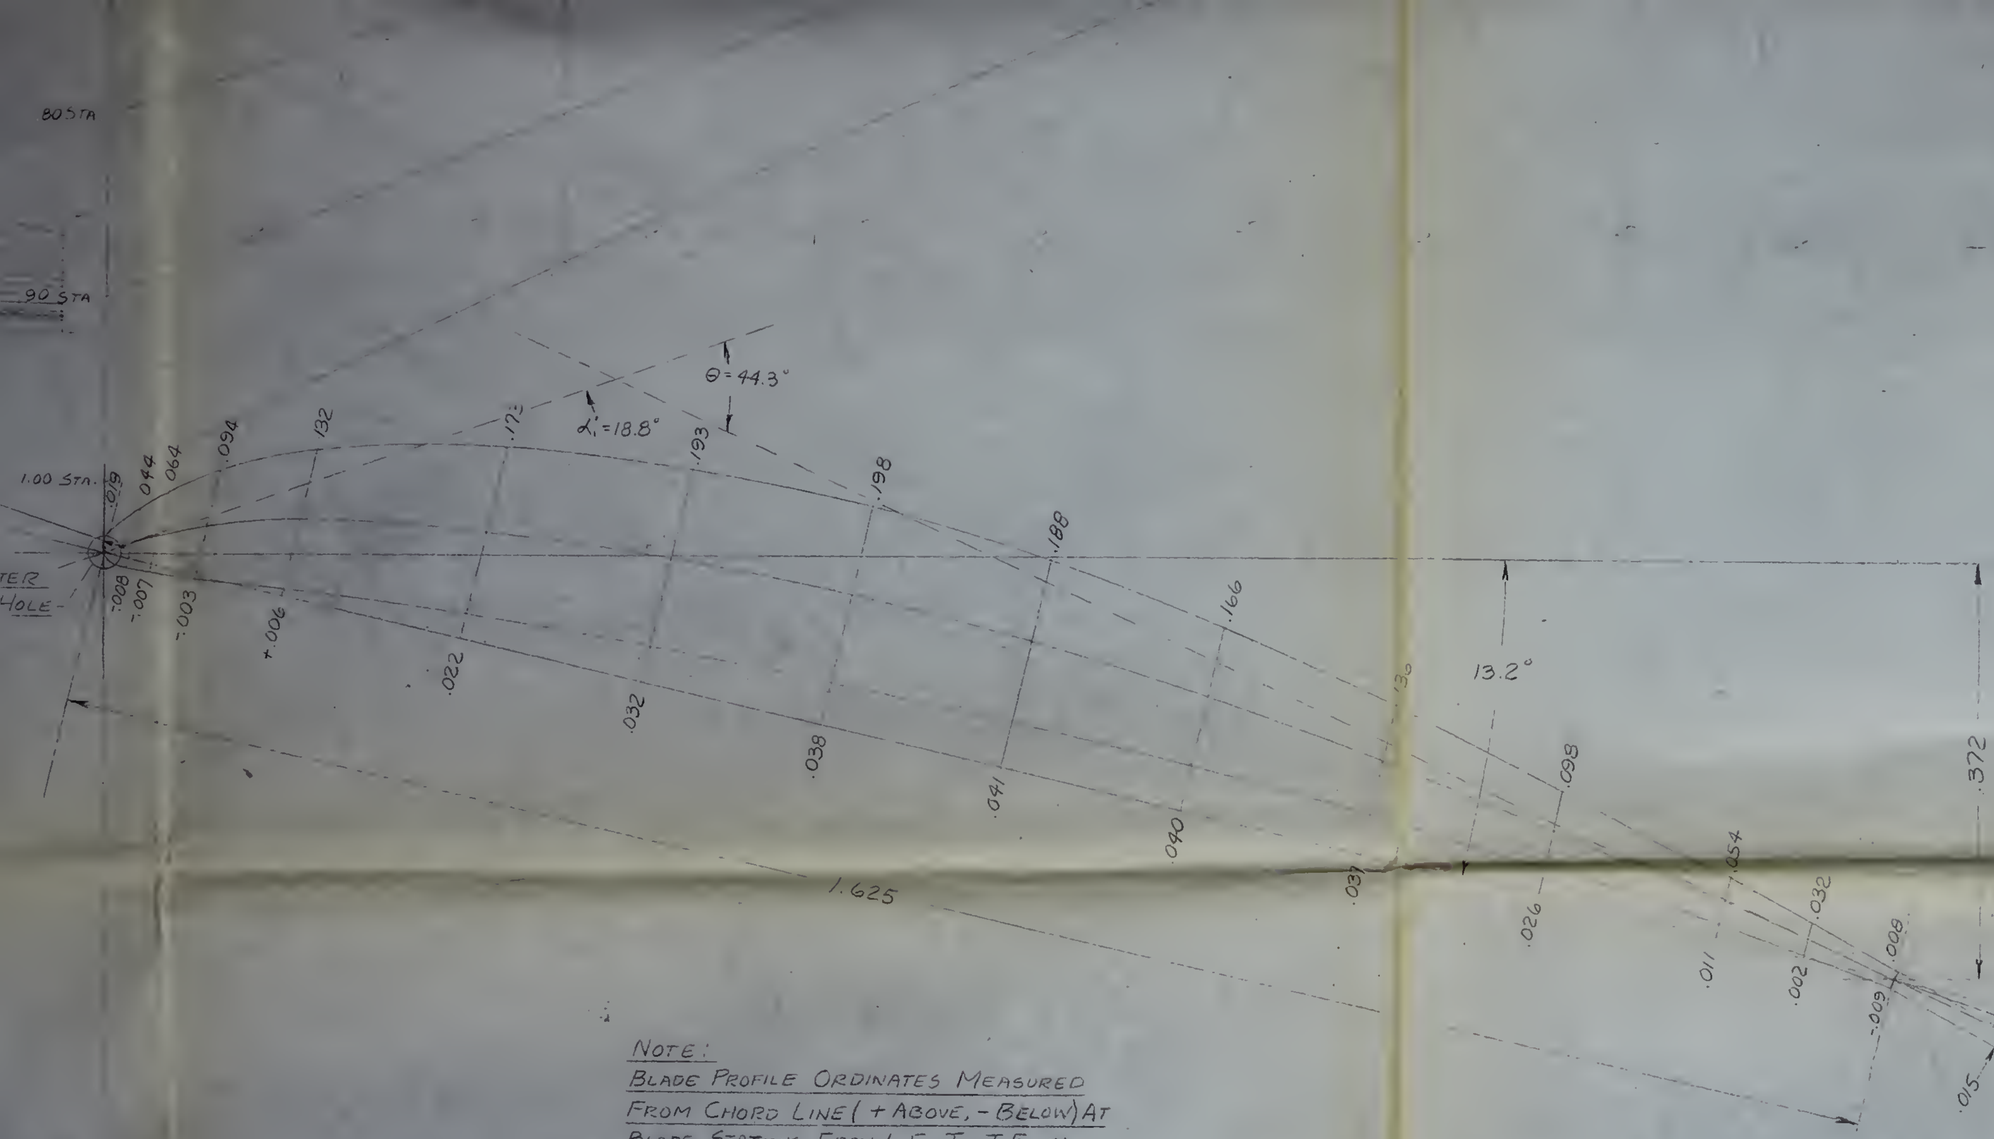

SECTION B-B (.7R)

NOTE:
BLADE PROFILE ORDINATES MEASURED FROM CHORD LINE (+ ABOVE, - BELOW) AT BLADE STATIONS, FROM L.E. TO T.E IN PERCENT OF CHORD: 0, 1.25, 2.5, 5.0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 95, 100.

NOTE:
DESIGN ANGLES $\alpha'_1, \alpha'_2, \theta, \alpha_{2D}$ FOR REFERENCE ONLY.
NOT TO BE USED FOR MANUFACTURE.

NO.	MATERIAL	NO. REQ.
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
INLET GUIDE VANE BLADE SECTIONS		
DRAWN BY Cq	DATE 3-17-49	
CHECKED BY	SCALE 10 X	
INST. NO. N-4244	N- 5238	

N-5256-5
16 MESH SCR

N-5256-1

27¼

30¾

14

27¼ I.D.

6

N-3245


16

16

DIMENSIONS 46 TO FACE OF FLANGE

1 2 2 2 2

1-5256-5
MESH SCREENS




N-5256-2

N-5256-6
16-MESH SCREENS


N-5256-3




N-5256-4

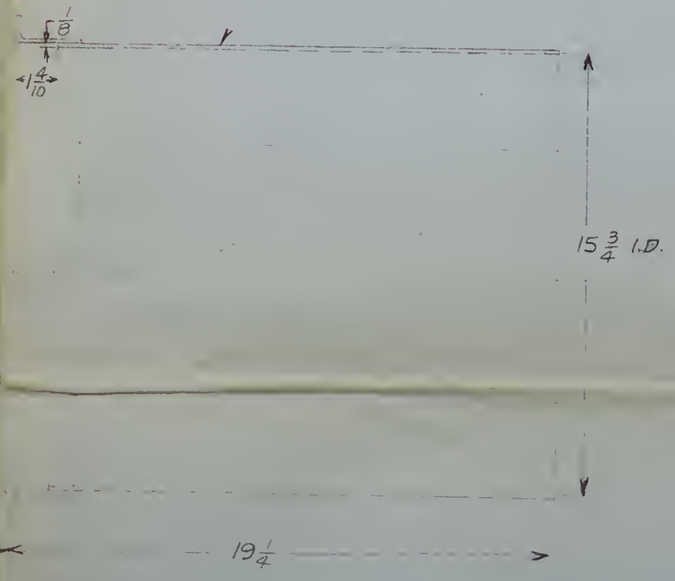


2 2 1
24

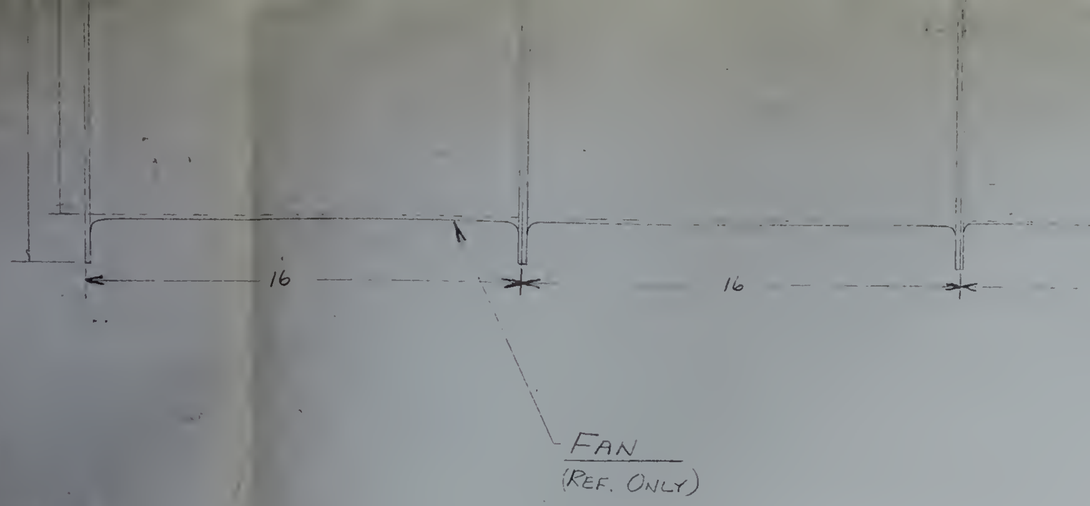

16
16
FAN
(REF. ONLY)


N-3245
DIMENSIONS
46
TO FACE OF FLANGE

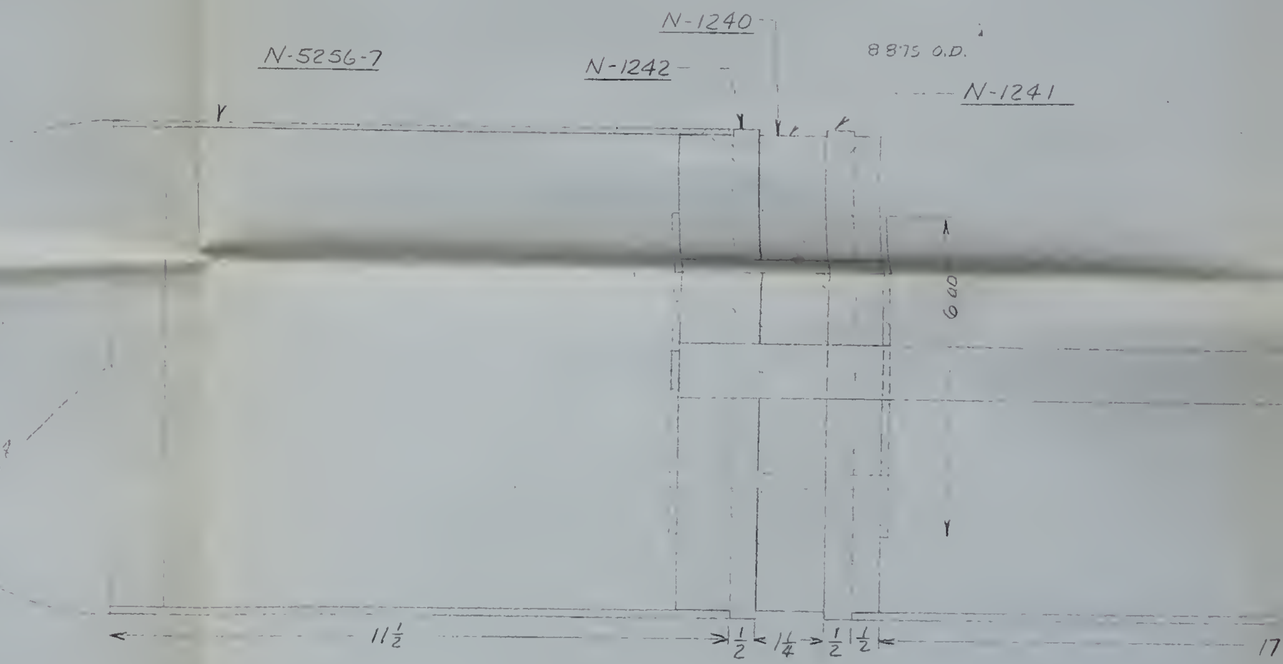
N-1240
N-5256-7
N-1242
8.875 O.D.
N-1241
N-1243
4.55 R
6.60
11½
½
1¼
½
½

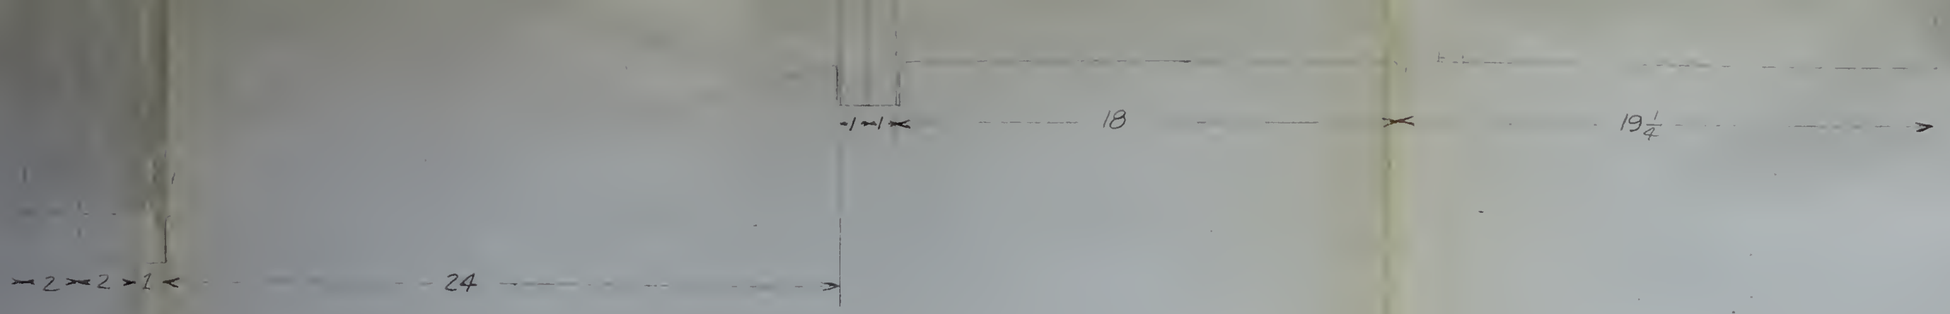

N-2218

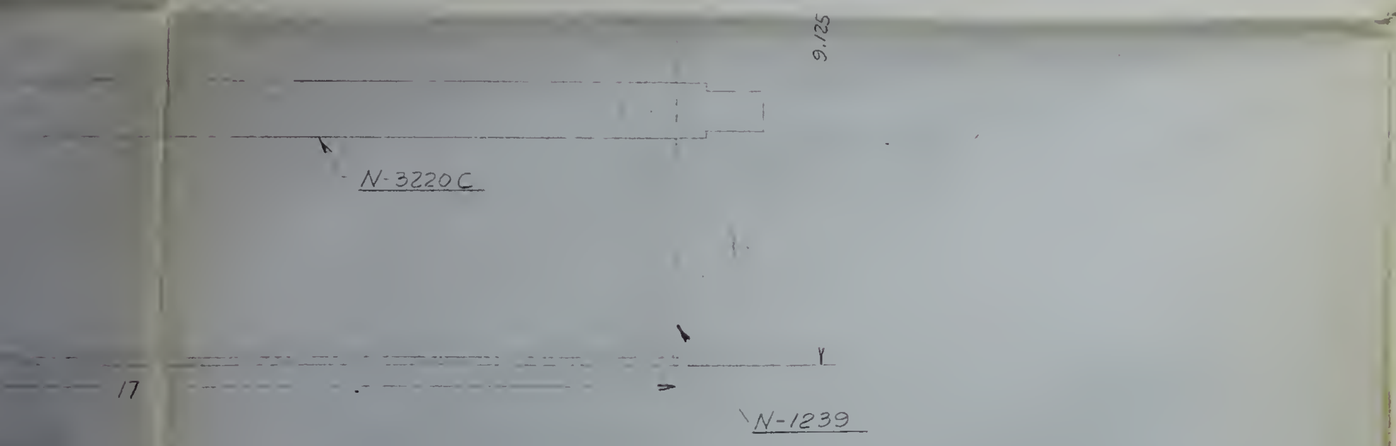

MATERIAL NO.

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

GAS TURBINE LABORATORY


ANNULAR-CASCADE TUNNEL


ASSEMBLY LAYOUT

DRAWN BY LASTER DATE 12-10-48

CHECKED BY SCALE


N-5256

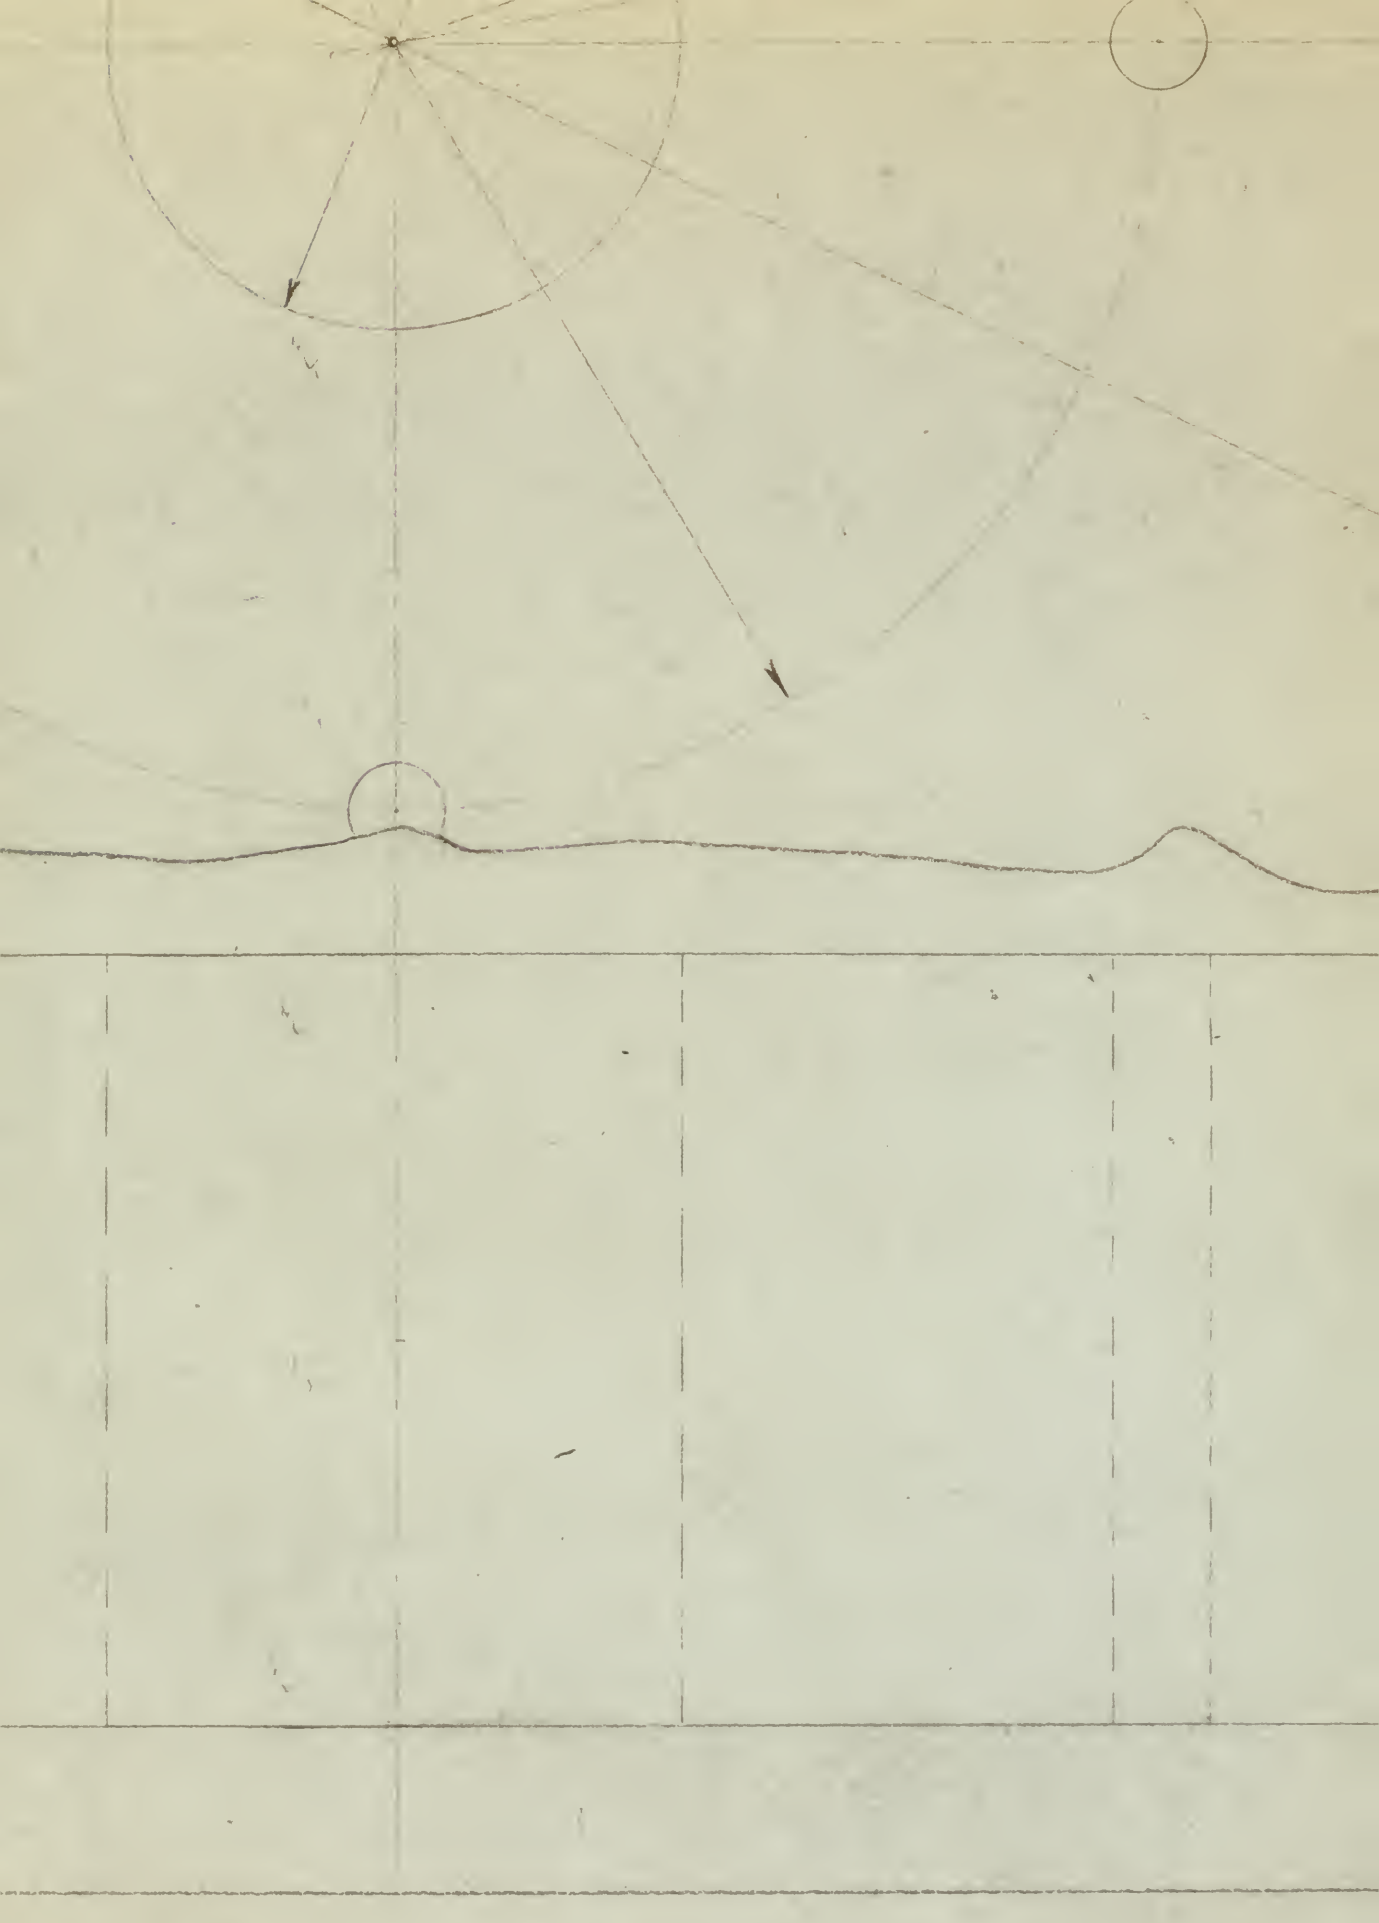

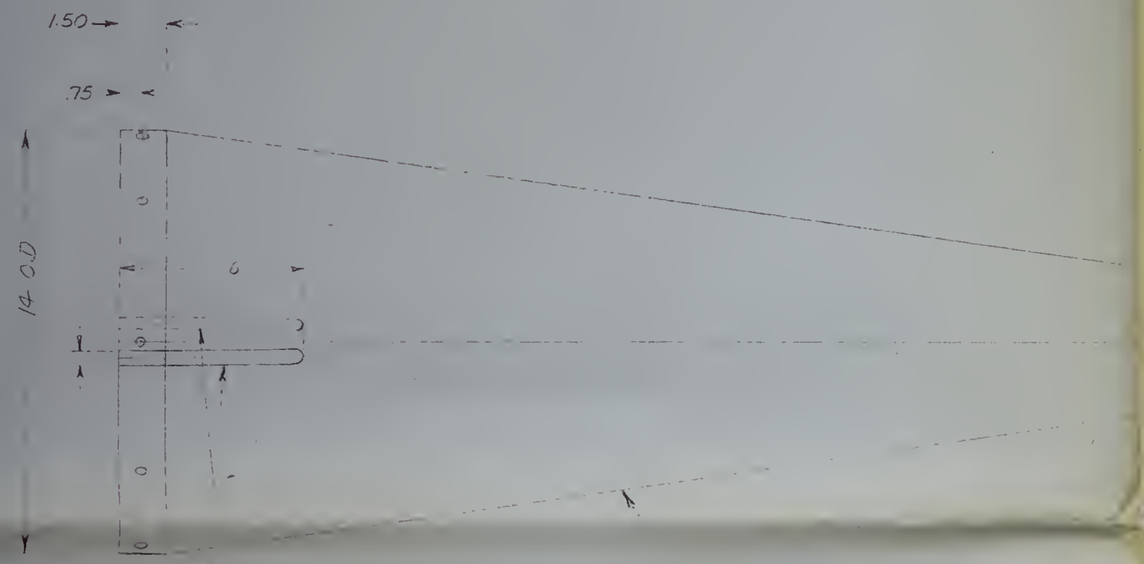

TWO SLOTS
.50 WIDE, 6 LONG
LOCATED DIAMETRICALLY OPPOSITE
NOTE LOCATION OF CINE SLOT
WITH RESPECT TO HOLE

SHEET STOCK
MAX THICKNESS .047

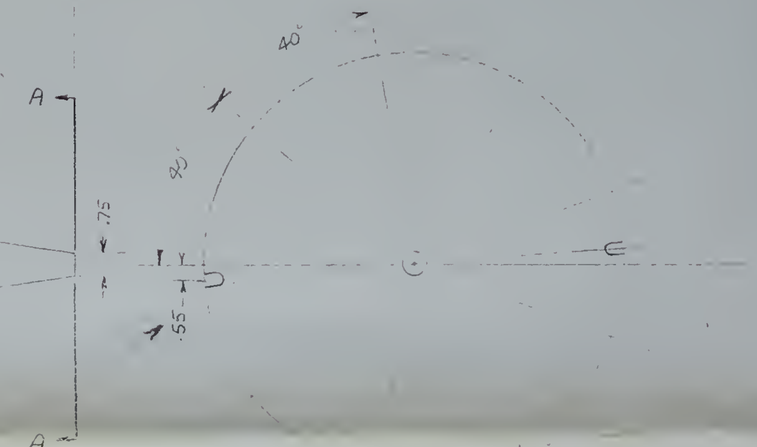

NINE HOLES
.44 DIA.
SPACED 40°


VIEW A-A


NO.	MATERIAL	NO. REQ.
		1

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
GAS TURBINE LABORATORY


DIFFUSER CONE

DRAWN BY Eq	DATE 12-14-48
CHECKED BY	SCALE 1/4
NEXT ASSEM.	N - 3245

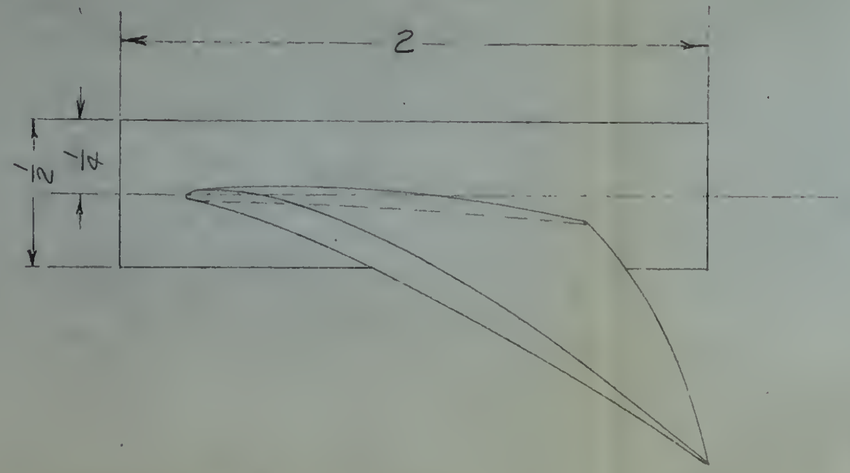



NOTE:
DIMENSIONS OF BLADE ROOT
ARE SUGGESTED DIM's ONLY.

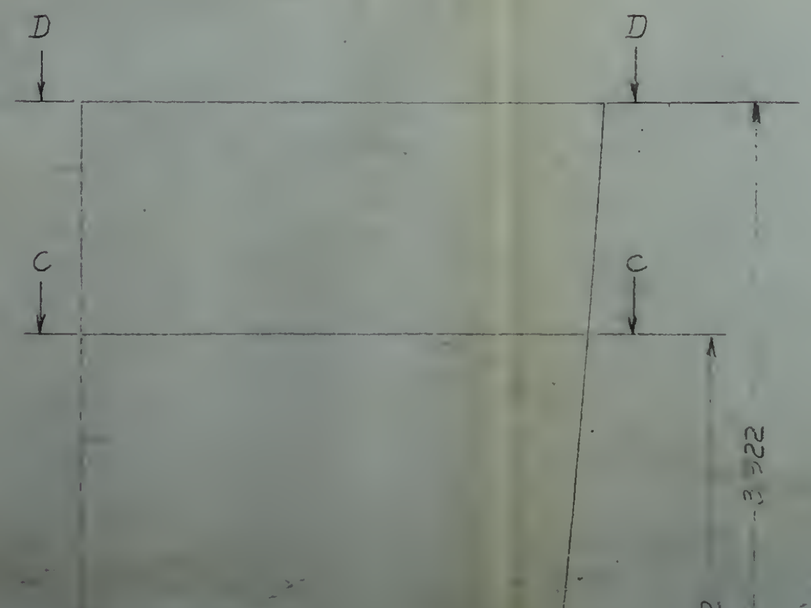

1/2

3/16

CHAMFER 45°
1/32
1/16


STAKE

10°

1.500 D.

2

OF BLADE ROOT
TED DIM'S ONLY.

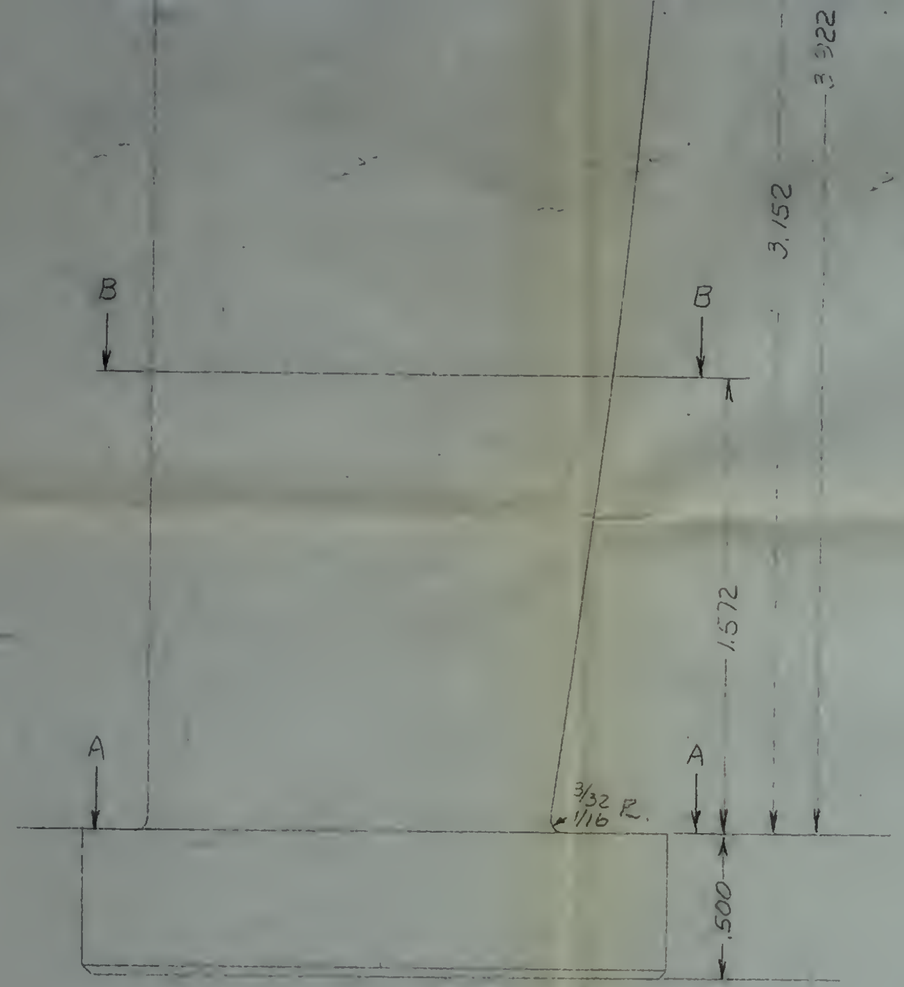

BLADE
36 REQ'D
SEE DWG. No. N-5238

HUB
1 REQ'D.

NOTE:
OVERALL DIAMETER AFTER ASSEMBLING BLADES IN HUB TO BE $15\frac{11}{16}, \pm\frac{1}{32}$

1.500 D.

4 D.

1.875 Disk Dia.

4 Holes
1/4 Dia.


HUB
1 Req'd.


...ETER AFTER ASSEMBLING BLADES
...E 15 11/16, ± 1/32


MASSACHUSETTS INSTITUTE OF TECHNOLOGY
GAS TURBINE LABORATORY


TEST ASSEMBLY
INLET GUIDE VANES

DRAWN BY Cg	DATE 3-24-49
CHECKED BY	SCALE 2X
NEXT ASSEM.	N - 4244

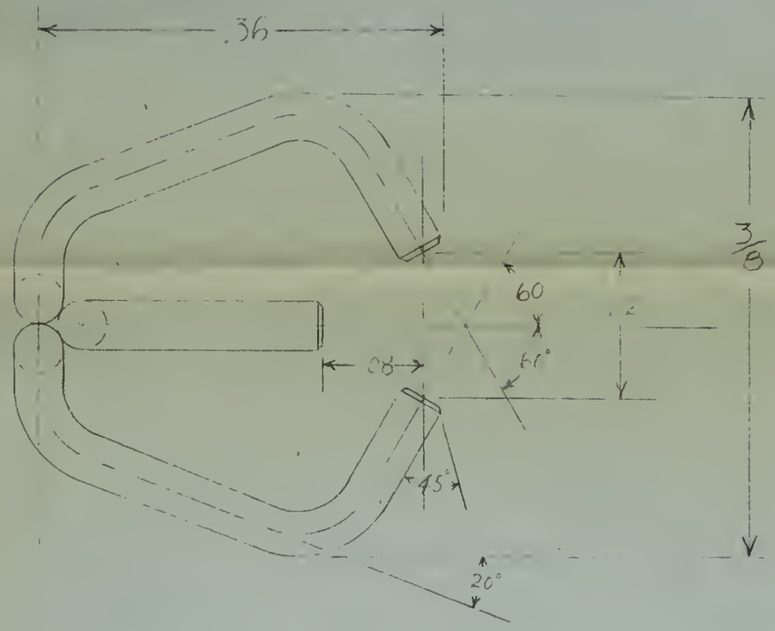



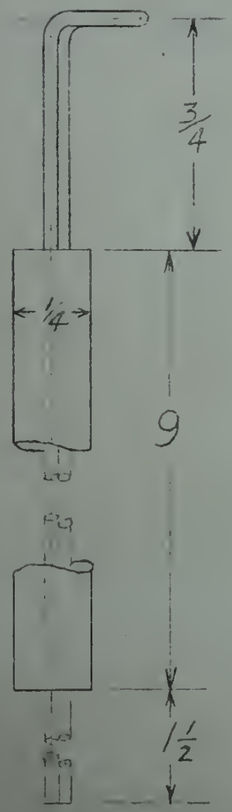

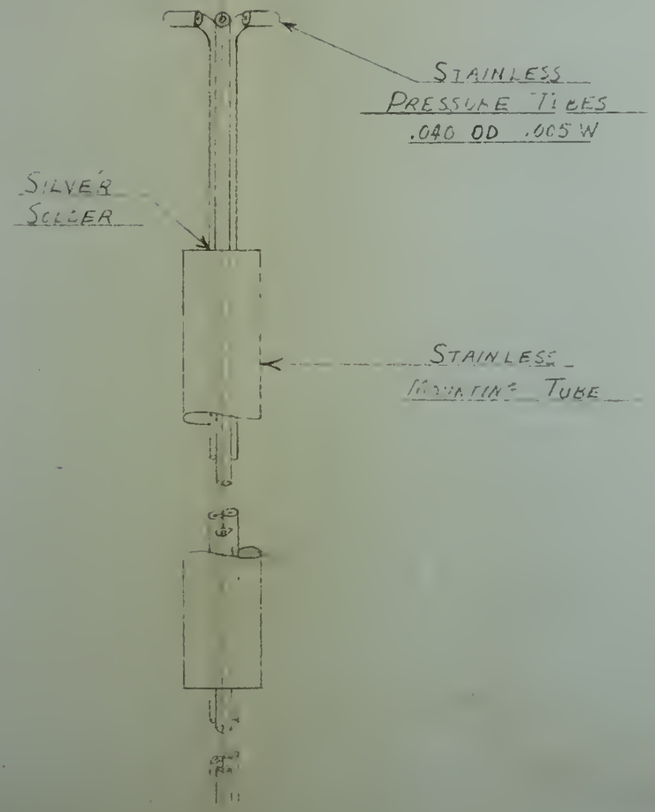



NO.	MATERIAL	NO.
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
YAW METER		
DRAWN BY I. ASTER		DATE 3-[illegible]-47
CHECKED BY		SCALE 2/1, 4/1
DRAWING NO. N-2226		N - 2237


FASTENED TO MANUAL CYLINDER FLAT HEAD

PRESS FIT BRONZE BUSHING

RUNNING FIT WITH A-3230

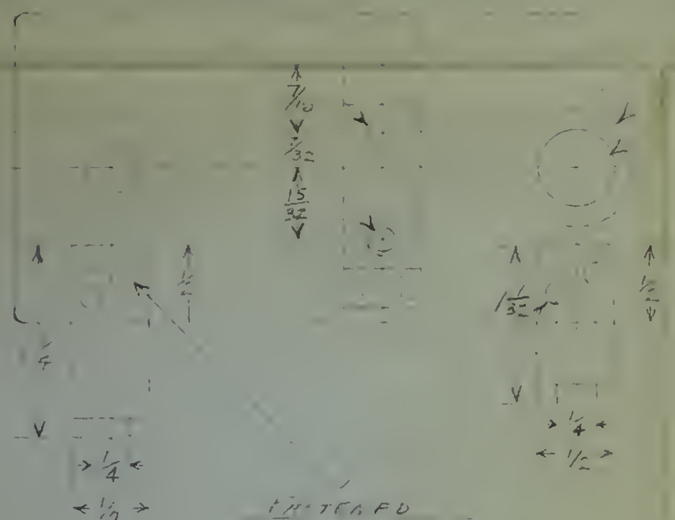


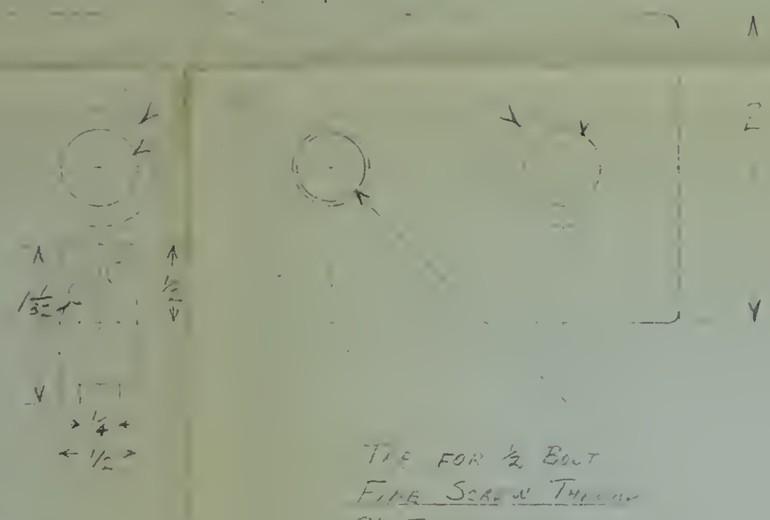

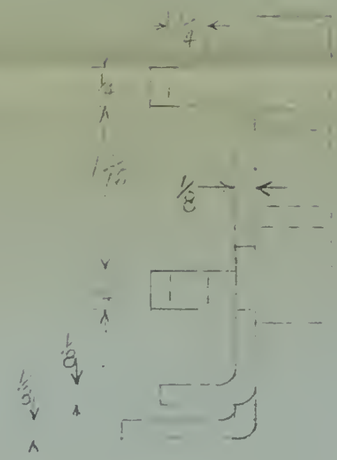


FASTENED #5 MACHINE SCREWS


TAP FOR ½ BOLT FINE SCREW THREAD 20 THREAD PER INCH

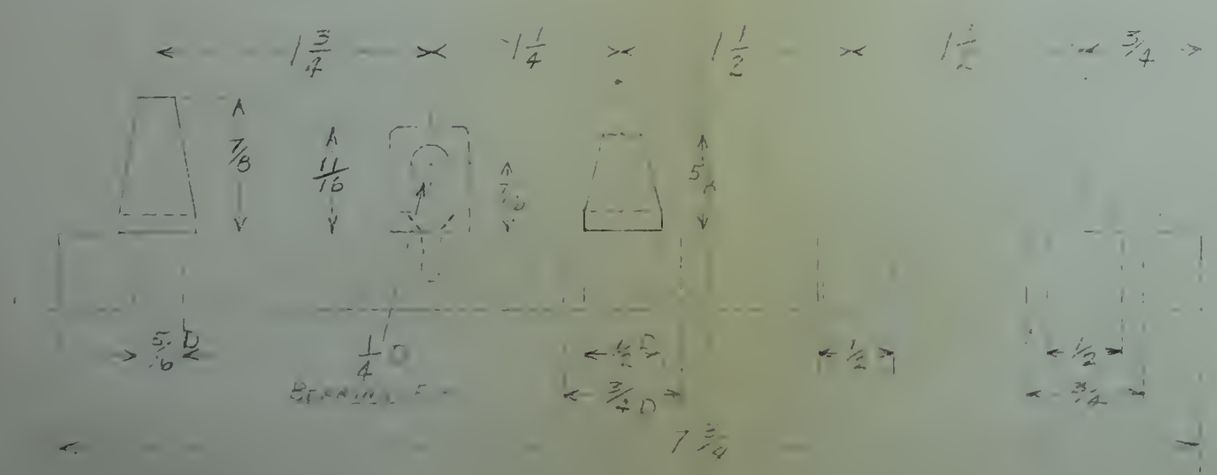


NO	MATERIAL	NO REQ
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
CARRIAGE FOR TWISTING MECH		
DRAWN BY LASTICH	DATE 3-4 [illegible]	
CHECKED BY	SCALE FULL	
NEXT ASSEM. A-3226	A-2231	

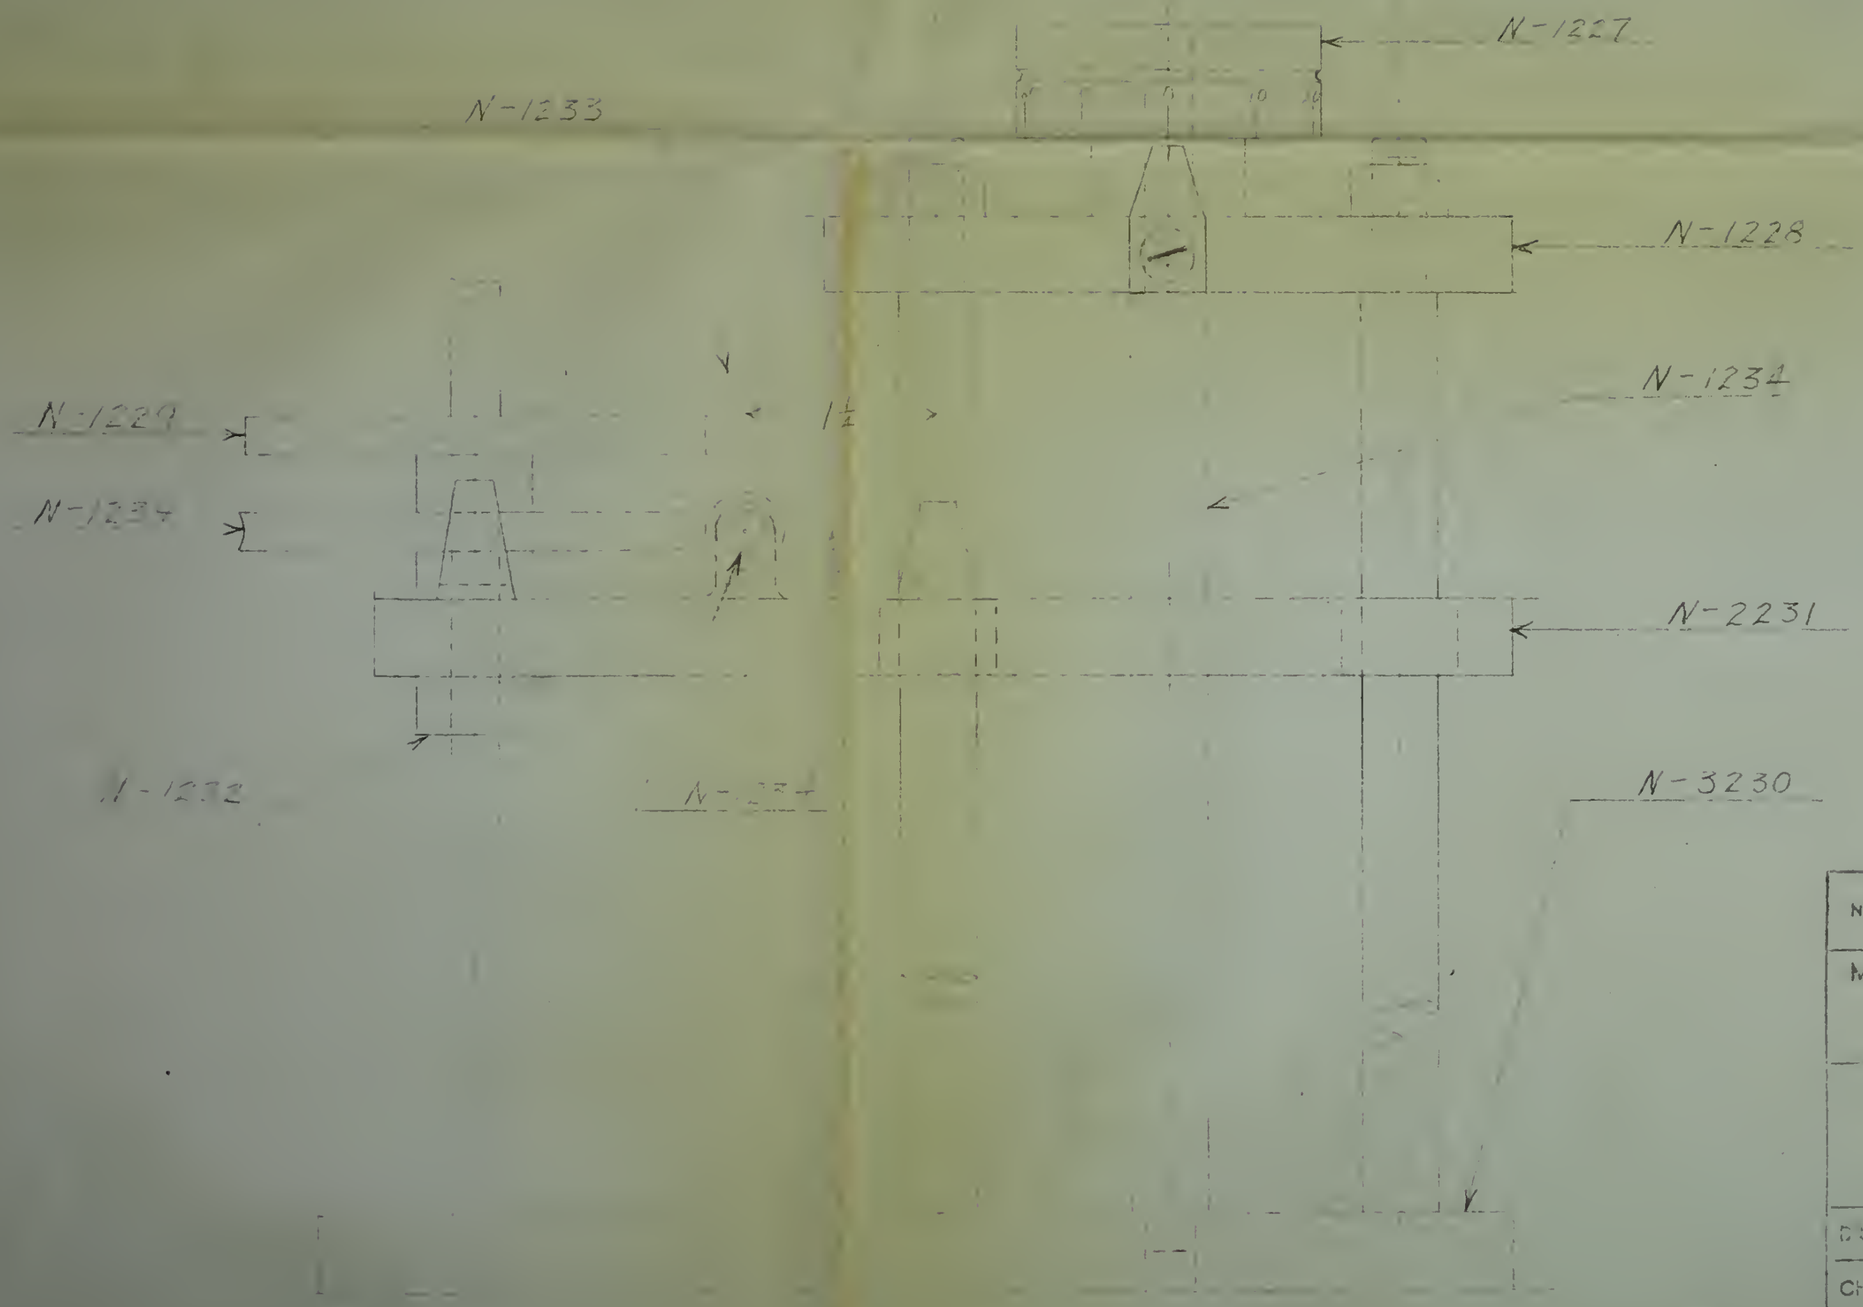


NO.	MATERIAL	NO. REQ.
MASSACHUSETTS INSTITUTE OF TECHNOLOGY GAS TURBINE LABORATORY		
TRAVERSING MECHANISM		
DRAWN BY LASTAR	DATE 3-1-44	
CHECKED BY	SCALE Full	
NEXT ASSEM.	N-2226	

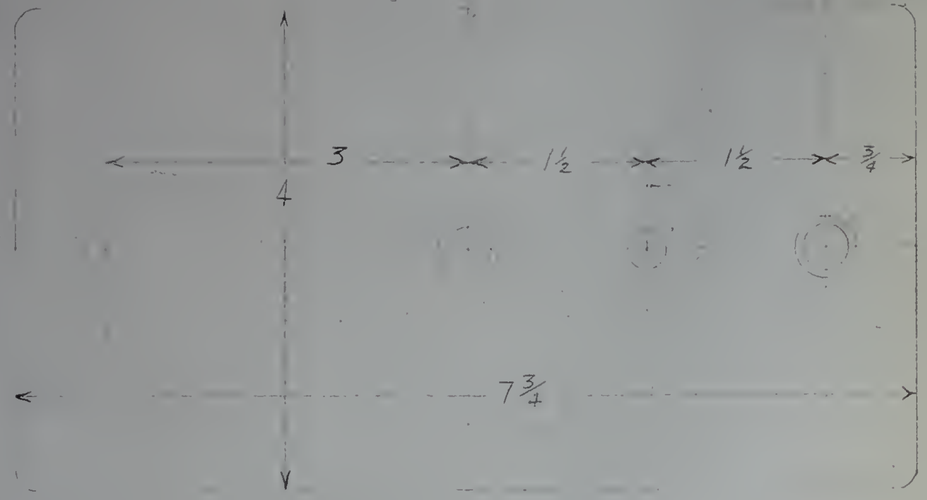

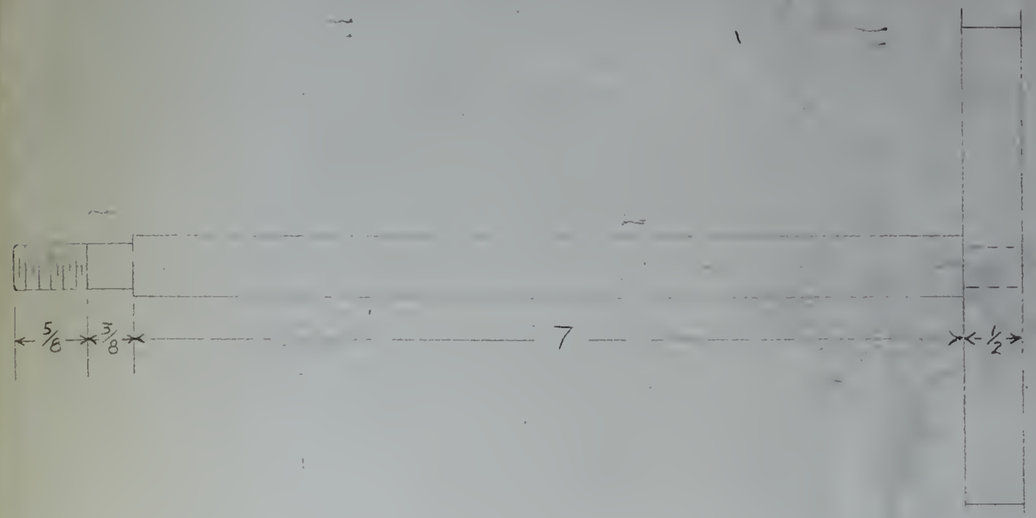









NO.	MATERIAL STEEL	NO. REQ.
MASSACHUSETTS INSTITUTE OF TECHNOLOGY GAS TURBINE LABORATORY		
BASE PLATE TRAVERSING MECHANISM		
DRAWN BY LASTER	DATE 3-2-49	
CHECKED BY	SCALE FULL	
NEXT ASSEM. N-2226	N - 3230	

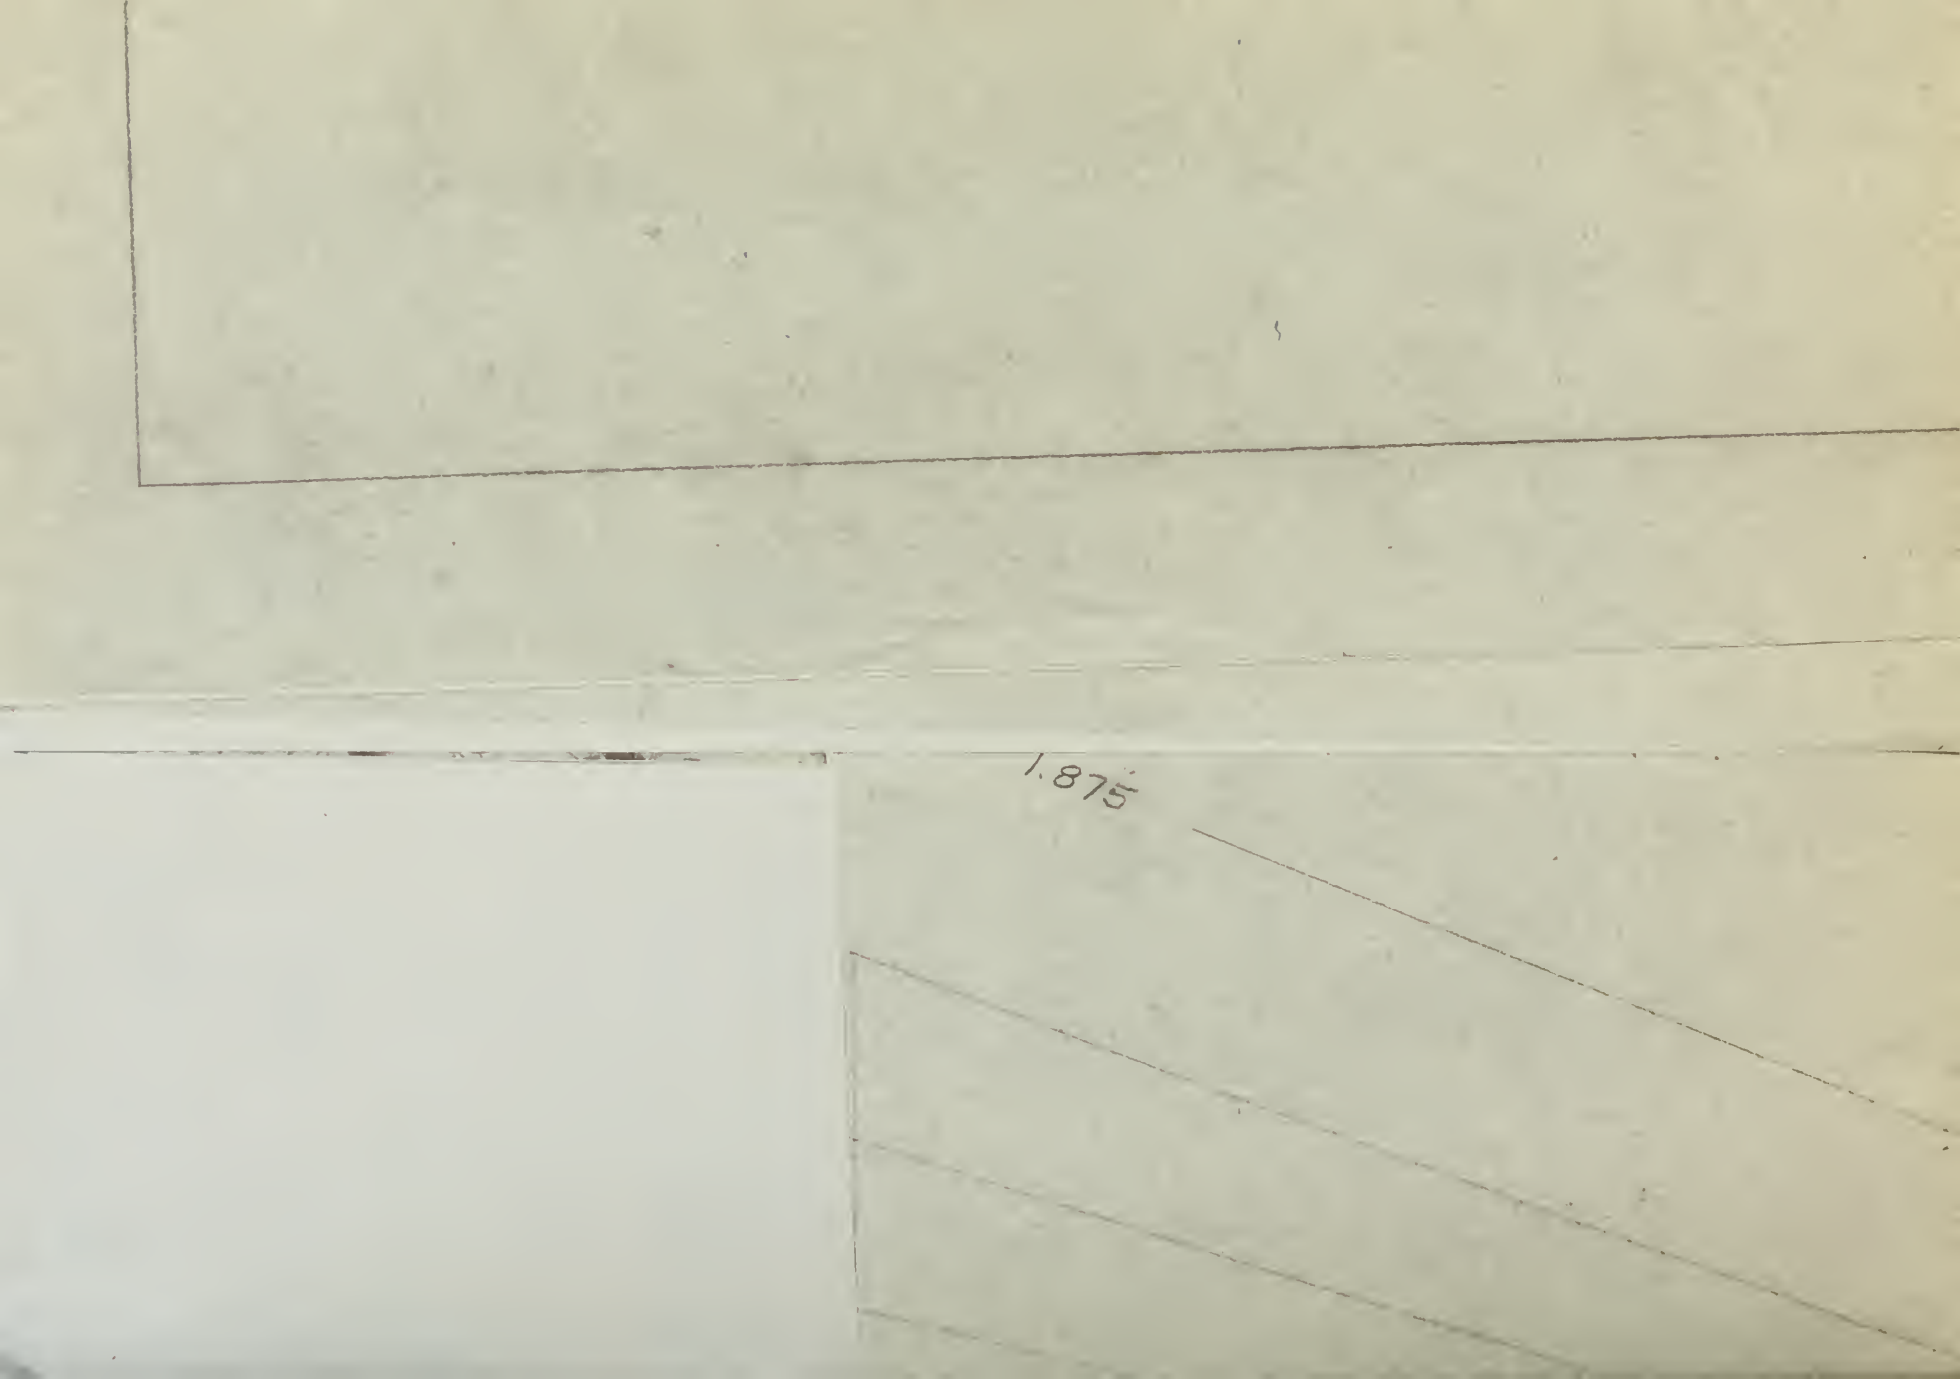
1.875

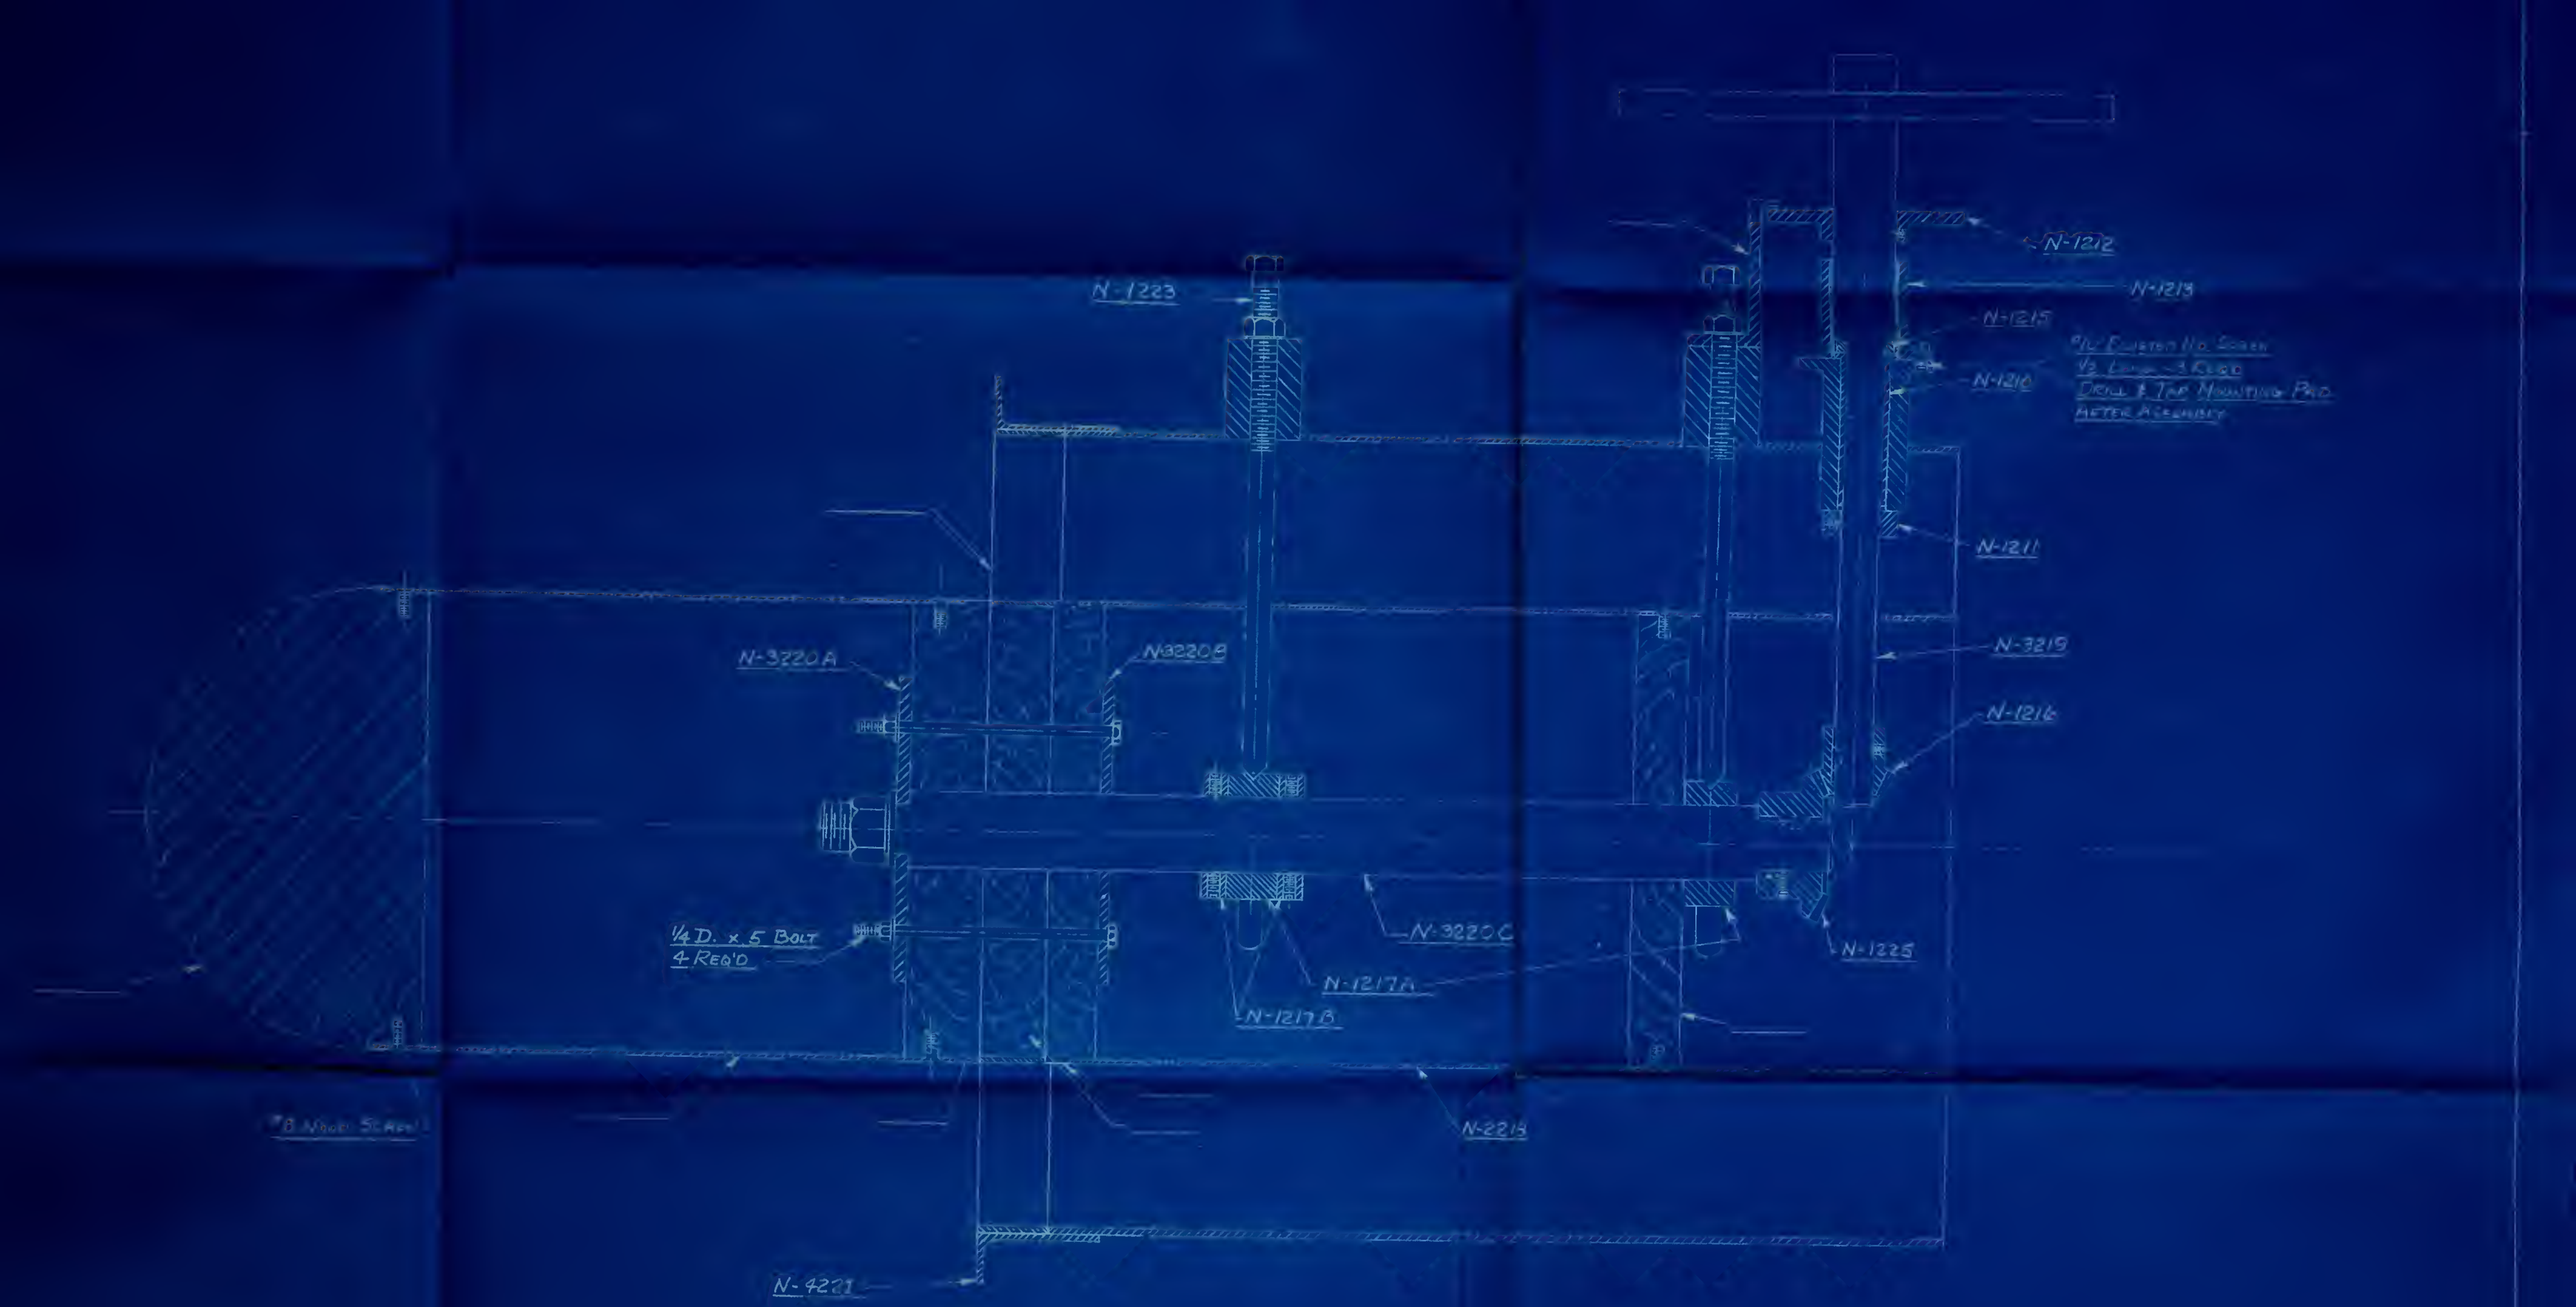

NO.	MATERIAL	DATE
MASSACHUSETTS INSTITUTE OF TECHNOLOGY		
GAS TURBINE LABORATORY		
AFTER SECTION ASSEMBLY		
DRAWN BY		DATE 2-24-43
CHECKED BY		SCALE 1/2
ISSUED BY		N- 4224



(SECTION AA ONLY)

120°

19 1/2 REF.
17 1/2
14 3/8
A
B
C
D

(SECTION AA ONLY)

120°

NOTE
GRIND FLUSH INSIDE

60°

A

B

N-1222

SECTION AA, BB

120°

120°

½" DRILL & TAP
AFTER WELDING IN POSITION

A

B

C

.9625
Note: Hold This Dim
Within .010

.1222

60°




1.000 DIA. +.002
DRILL & REAM
AFTER WELDING IN POSITION

N-1214

SECTION CC

...ING
...E IN POSITION

	MATERIAL	
MASSACHUSETTS ...	... OF TECHNOLOGY	
GAS TU... LABORATORY		
AFTER SECTION OUTER CASING SUB-ASSEMBLY		
		DATE 2-16-49
		SCALE 1/2
	N-	N...

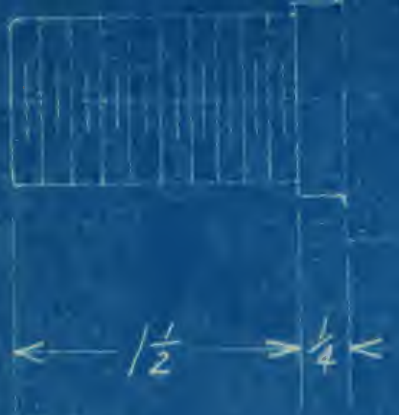

16 7/8

C

AUG 31 BINDERY

Thesis 13676
L28 Laster
A design of an annular
cascade tunnel and a
cascade of airfoils.

Thesis 13676
L28 Laster
Design of an annular cascade
tunnel and a cascade of airfoils

Library
U. S. Naval Postgraduate School
Monterey, California

ARTISAN
GOLD LETTERING
AND
SMITH BINDERY
OAKLAND, CALIF

thesL28
A design of an annular cascade tunnel an
3 2768 002 12285 5
DUDLEY KNOX LIBRARY